

System: DIESEL ENGINE  
Sump Capacity (k): 85 L  
Lubricant (k): ATLAS PAROIL E MISS.GREEN SAE 15W40  
Labocodenbr: 109897-tq.1  
Samplenummer: 05.06.24 A003  
Labelnummer: 00731989  
Date sample drawn (k): 31.05.2024  
Sampling: by client

Customer (k): ATLAS COPCO RENTAL EUROPE  
Luc Despeghele  
Address (k): INDUSTRIEWEG 1F  
B- 2850 BOOM  
Your customer (k): 864909/18504  
Your ref. (k): B/864909/18504/PTS1600



Oil



Pollution



Wear



## Diagnostic

The oil is in good condition and the wear metals are considered normal.

Normal

Results:	Method*	Unit	Current sample	05.06.24 A003		
Analysis date			5/06/2024	31/05/2024	23/05/2024	14/05/2024
Date of receipt			5/06/2024	31/05/2024	23/05/2024	14/05/2024
Sample date (k)			31/05/2024	21/05/2024	7/05/2024	7/05/2024
H/Km Oil (k)			584 H	311 H	175 H	? H
H/Km total (k)			584 H	345 H	175 H	39 H
Top up (k)			?	?	?	?

## Oil Condition:

Viscosity at 40°C	ASTM D7279	cSt				
Viscosity at 100°C	ASTM D7279	cSt	14.0	14.1	14.4	14.7
Viscosity-index	ASTM D2270					
Fuel dilution	ASTM D7593	%	0.65	0.76	0.70	0.79
AN	ASTM D8045	mg KOH/g				
BN	ASTM D2896B	mg KOH/g				
Oxidation	ASTM E2412 (A)	Abs/0.1mm	14.2	13.4	13.3	12.1
Nitration	ASTM E2412	Abs/0.1mm	8.8	8.3	7.9	7.0
PMCC	ASTM D93	°C				
COC	ASTM D92B	°C				
Color	ASTM D1500					

## Additives:

Ba: Barium	ASTM D5185	ppm	1	< 1	< 1	< 1
Ca: Calcium	ASTM D5185 (A)	ppm	2248	2304	2350	2170
Mg: Magnesium	ASTM D5185 (A)	ppm	16	18	17	16
P: Phosphorus	ASTM D5185 (A)	ppm	974	1022	1069	1035
S: Sulfur	ASTM D5185	%	0.38	0.39	0.41	0.37
Zn: Zink	ASTM D5185 (A)	ppm	1168	1179	1208	1153

## Pollution:

Si: Silicon	ASTM D5185 (A)	ppm	< 10	< 10	< 10	< 10
B: Boron	ASTM D5185	ppm	101	113	132	149
Na: Sodium	ASTM D5185 (A)	ppm	5	5	5	< 5
Water	WI-0002	%	< 0.04	< 0.04	0.05	< 0.04
Water (KF)	ASTM D6304C	ppm				
Soot content	ASTM E2412 (A)	%	0.04	0.03	0.03	0.02
Antifreeze	ASTM D2982A		Neg.	Neg.	Neg.	Neg.
PC ISO grade	ASTM D7647 (A)					
PC Cleanliness class	ASTM D7647 (A)					
Insolubles	ASTM D4898	mg/l				

## Wear metals:

Al: Aluminium	ASTM D5185 (A)	ppm	< 5	< 5	< 5	< 5
Cr: Chromium	ASTM D5185 (A)	ppm	< 5	< 5	< 5	< 5
Cu: Copper	ASTM D5185 (A)	ppm	7	< 5	< 5	< 5
Fe: Iron	ASTM D5185 (A)	ppm	7	< 5	< 5	< 5
Mo: Molybdenum	ASTM D5185 (A)	ppm	87	89	94	90
Pb: Lead	ASTM D5185 (A)	ppm	< 5	< 5	< 5	< 5
Sn: Tin	ASTM D5185	ppm	1	< 1	1	1
PQ index	WI-0021					

These conclusions are based on the tested supplied samples and information where the representativeness and validity cannot be guaranteed. Opinions and interpretation are outside the scope of accreditation. The measurement uncertainty is available on request. Samples are destroyed 2 months after receipt. The report may only be reproduced complete. Distribution on the responsibility of the client. \*Methods are modified according to specified method. (A) Accreditation. (U) Outsourced. (k) Received info from customer.

Batch: 2415805 - p.1 / 3

Diagnosis: ANW

Date of issue: 06/06/2024

B118 AC RENTAL EUROPE.




## History lubricant:

05.06.24 A003

1	05.06.24 A003	ATLAS PAROIL E MISS.GREEN SAE 15W40
2	31.05.24 A004	ATLAS PAROIL E MISS.GREEN SAE 15W40
3	23.05.24 A007	ATLAS PAROIL E MISS.GREEN SAE 15W40
4	14.05.24 A013	?
5		
6		

History 05.06.24 A003

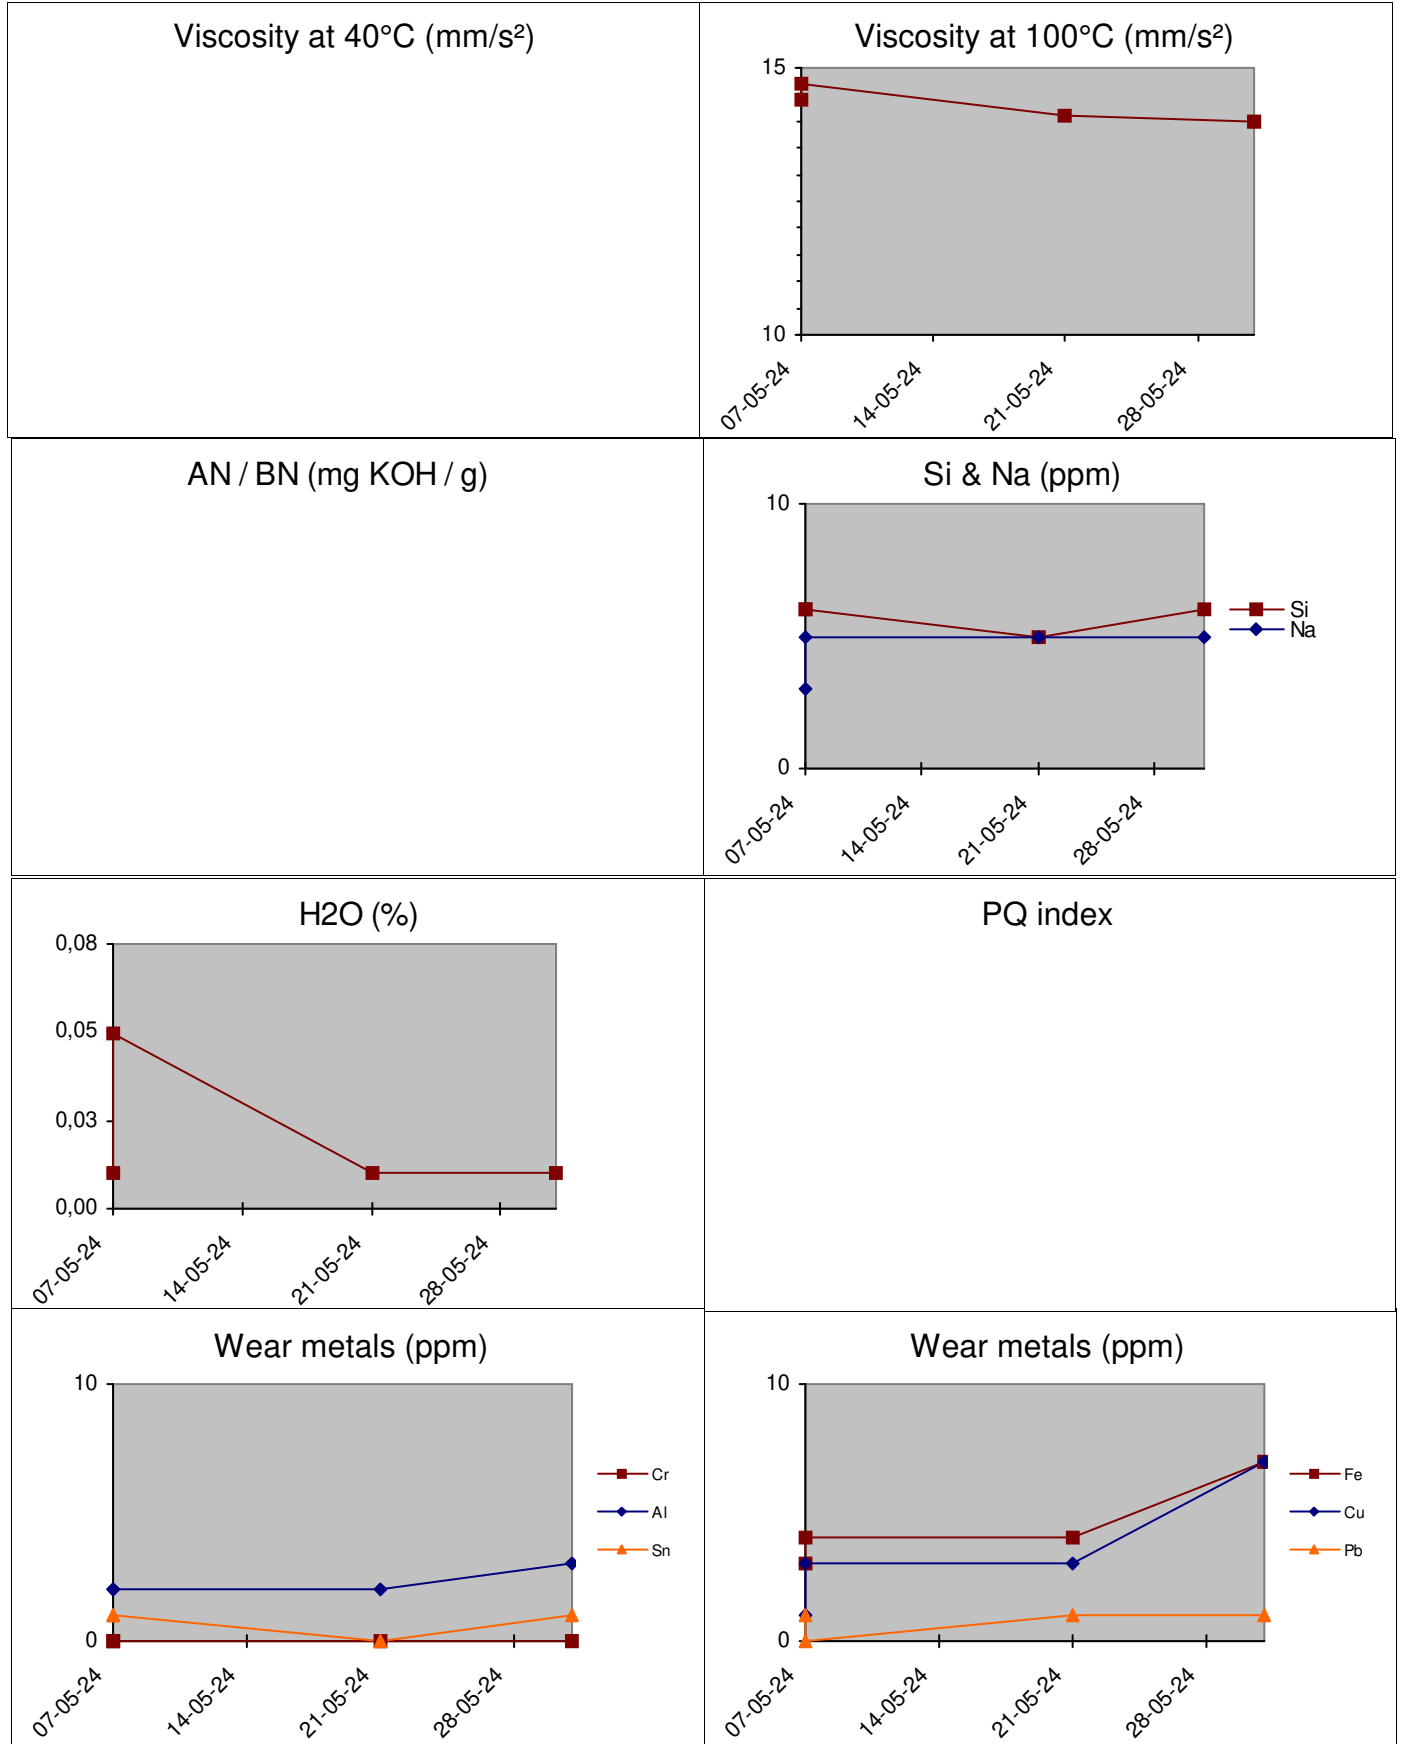

These conclusions are based on the tested supplied samples and information where the representativeness and validity cannot be guaranteed. Opinions and interpretation are outside the scope of accreditation. The measurement uncertainty is available on request. Samples are destroyed 2 months after receipt. The report may only be reproduced complete. Distribution on the responsibility of the client. \*Methods are modified according to specified method. (A) Accreditation, (U) Outsourced, (k) Received info from customer.