



1227 Deeds Ave., P.O. Box 696, Dayton, OH 45401

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[TRACY A TAYLOR INC]
 Machine Id
SHELL ROTELLA 15W40
 Component
New (Unused) Oil
 Fluid
SHELL ROTELLA T 15W40 (--- QTS)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AL02002038	---	---
Sample Date		Client Info		24 Jul 2007	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Iron	ppm	ASTM D5185m		2	---	---
Chromium	ppm	ASTM D5185m		<1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---













CONTAMINATION

Silicon	ppm	ASTM D5185m		6	---	---
Potassium	ppm	ASTM D5185m		0	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

The viscosity index is 141.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		43	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		8	---	---
Calcium	ppm	ASTM D5185m		2488	---	---
Phosphorus	ppm	ASTM D5185m		1297	---	---
Zinc	ppm	ASTM D5185m		1283	---	---
Sulfur	ppm	ASTM D5185m		4327	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.83	---	---
Visc @ 40°C	cSt	ASTM D445		116.6	---	---
Visc @ 100°C	cSt	ASTM D445		15.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270		141	---	---

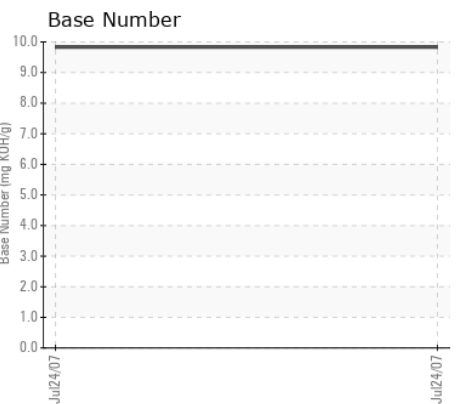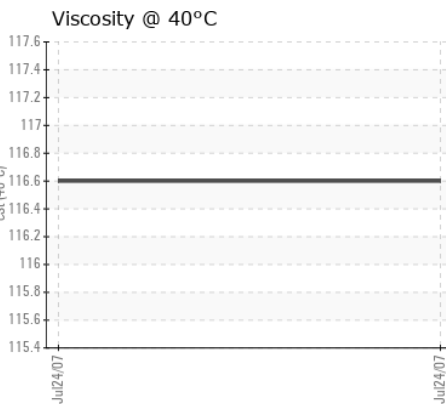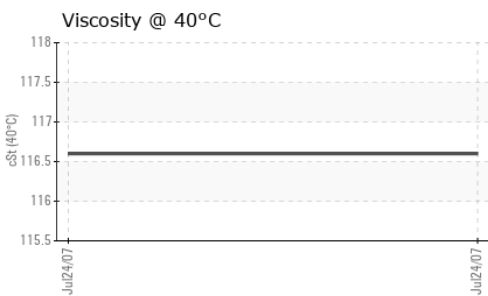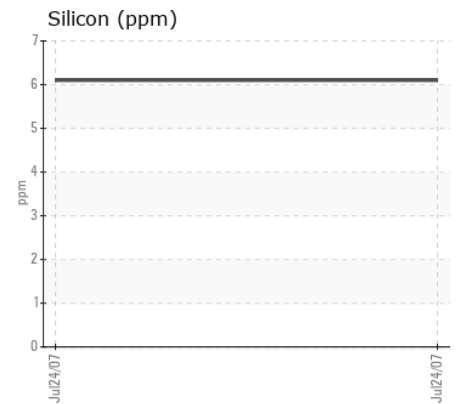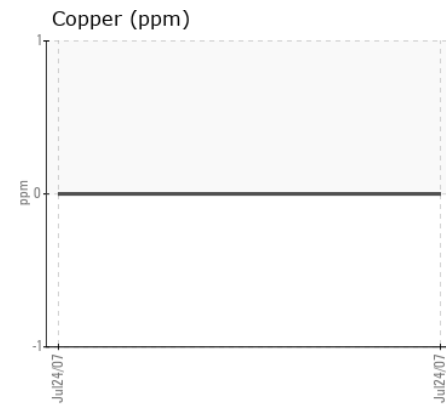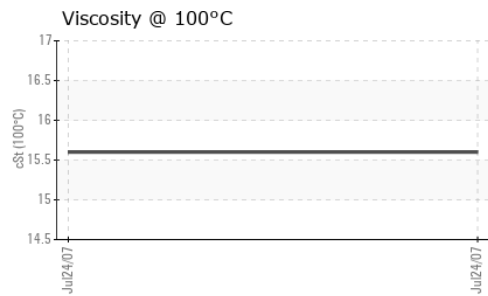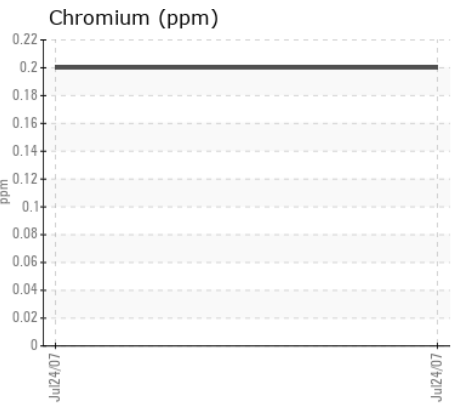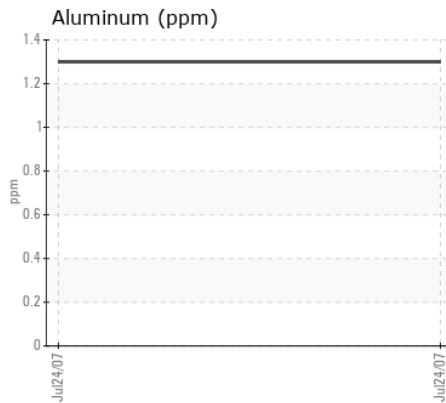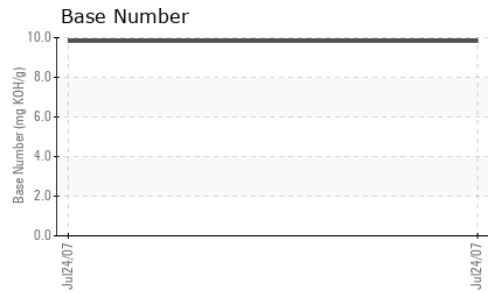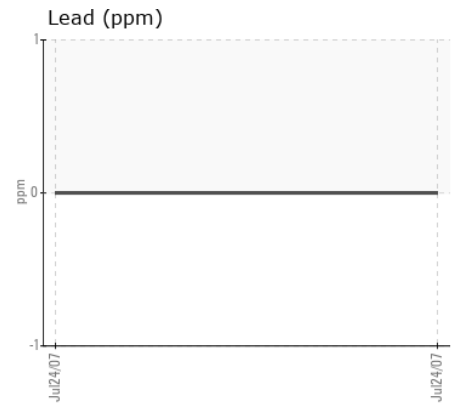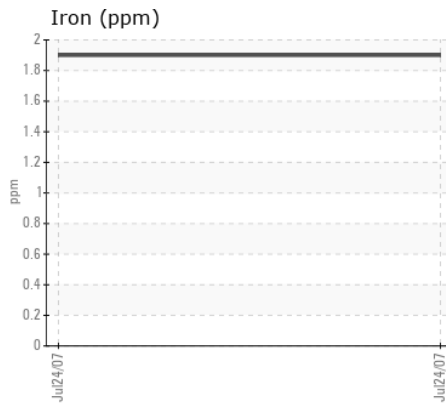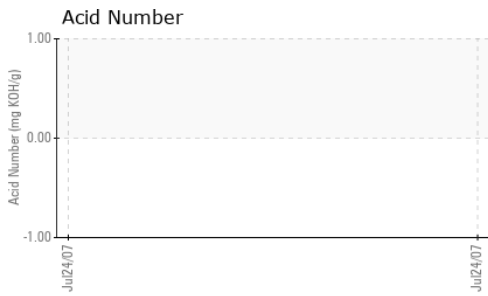

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : AL02002038

Lab Number : 02002038

Unique Number : 4175788

Test Package : MOB 2 (Additional Tests: KV100, TBN, VI)

Received : 31 Jul 2007

Tested : 02 Aug 2007

Diagnosed : 02 Aug 2007 - Doug Bogart

THE AMERICAN LUBRICANTS COMPANY

PO BOX 696

Dayton, OH

US 45401-0696

Contact: Darrell Holt

dsholt649@aol.com

T: (937)222-2851

F: (937)461-7729

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)