



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BOBCAT L-10
Component
Rear Diesel Engine
Fluid
SAFETY KLEEN CJ4 10W30 (5 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC992630	---	---
Sample Date		Client Info		26 Apr 2018	---	---
Machine Age	hrs	Client Info		378	---	---
Oil Age	hrs	Client Info		8	---	---
Filter Age	hrs	Client Info		8	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	1	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>25	4.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>35	14.9	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		0	---	---
Boron	ppm	ASTM D5185(m)		9	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		50	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		843	---	---
Calcium	ppm	ASTM D5185(m)		1047	---	---
Phosphorus	ppm	ASTM D5185(m)		953	---	---
Zinc	ppm	ASTM D5185(m)		1139	---	---
Sulfur	ppm	ASTM D5185(m)		2671	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	10.6	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		102	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		142	---	---

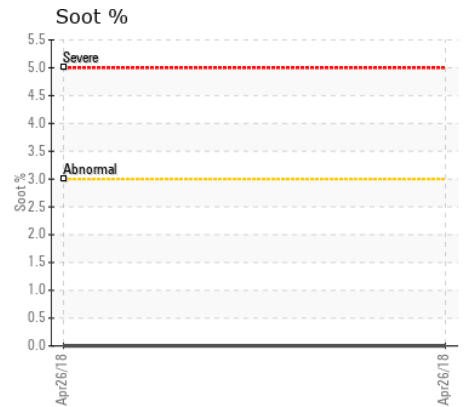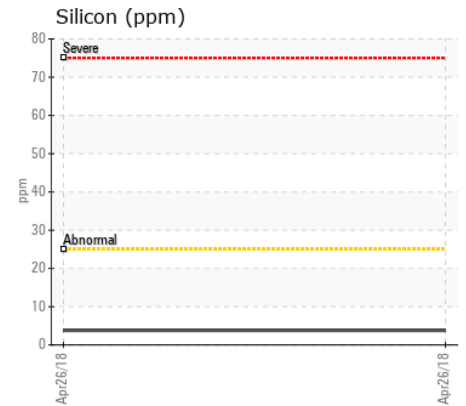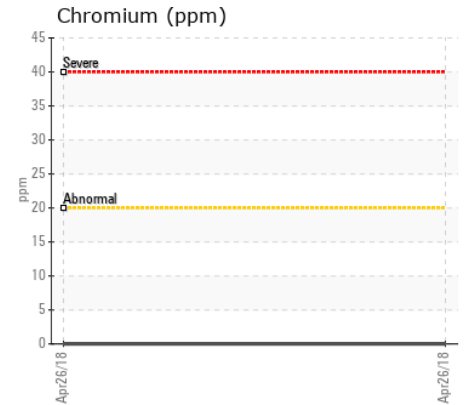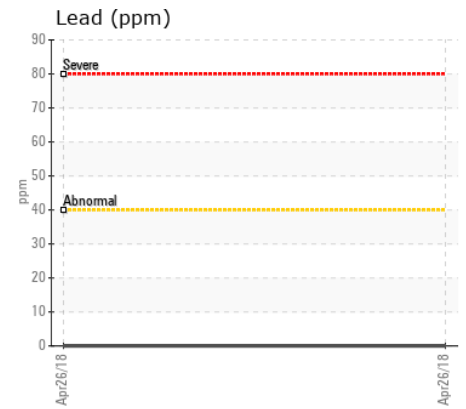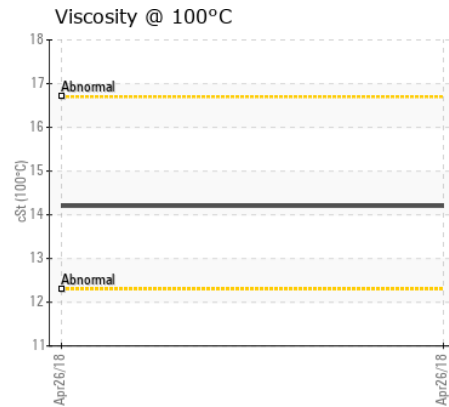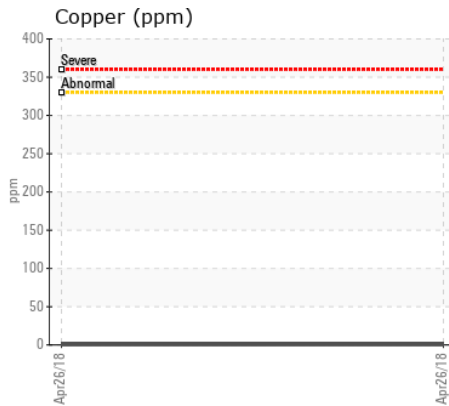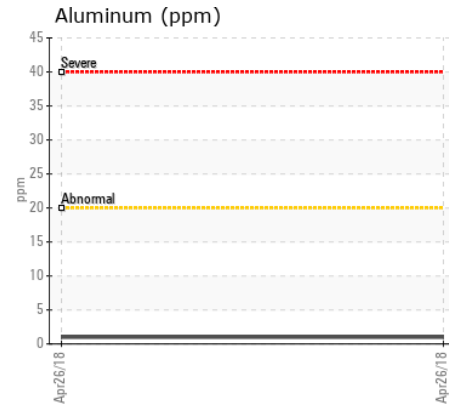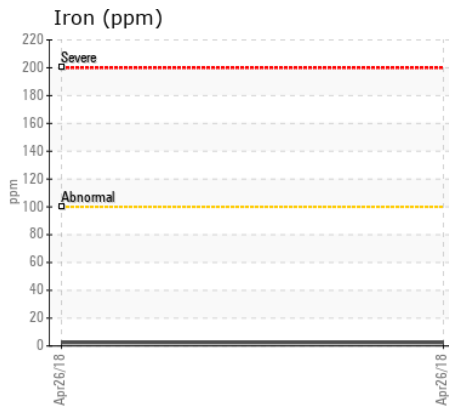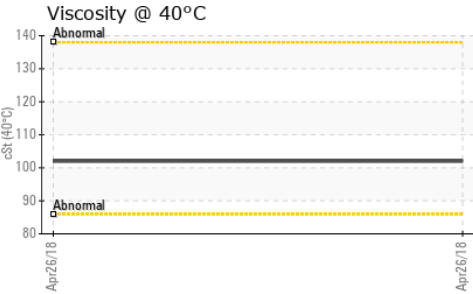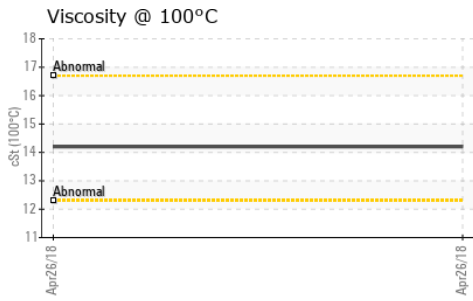

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC992630 **Received** : 01 May 2018
Lab Number : 02213386 **Tested** : 03 May 2018
Unique Number : 4680510 **Diagnosed** : 03 May 2018 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI)

MIDDLESEX COUNTY ROAD DEPARTMENT
 1988 GAINSBOROUGH ROAD, R.R. #41
 LONDON, ON
 CA N6H 5L2
 Contact: PAUL MONIZ
 pmoniz@middlesex.ca
 T: (519)471-2020
 F: (519)471-2335

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.