



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD FORD F150XL
 Component
Gasoline Engine
 Fluid
TRC PRO-SPEC IV 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR02435413	---	---
Sample Date		Client Info		06 Jul 2009	---	---
Machine Age	mls	Client Info		128695	---	---
Oil Age	mls	Client Info		3008	---	---
Filter Age	mls	Client Info		3008	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m		10	---	---
Chromium	ppm	ASTM D5185m		<1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		3	---	---
Lead	ppm	ASTM D5185m		4	---	---
Copper	ppm	ASTM D5185m		2	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m		7	---	---
Potassium	ppm	ASTM D5185m		6	---	---
Fuel		WC Method		<1.0	---	---
Water		WC Method		NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624		9.	---	---
Sulfation	Abs/.1mm	*ASTM D7415		20.	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

The condition of oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		4	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		720	---	---
Calcium	ppm	ASTM D5185m		1261	---	---
Phosphorus	ppm	ASTM D5185m		964	---	---
Zinc	ppm	ASTM D5185m		1160	---	---
Sulfur	ppm	ASTM D5185m		3459	---	---
Oxidation	Abs/.1mm	*ASTM D7414		15.	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		11.3	---	---
Visc @ 100°C	cSt	ASTM D445		14.41	---	---

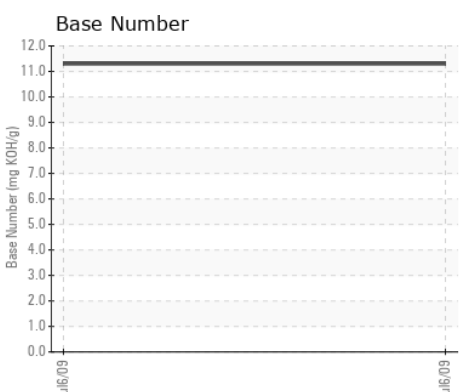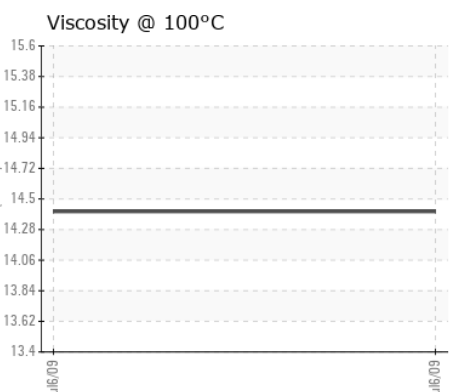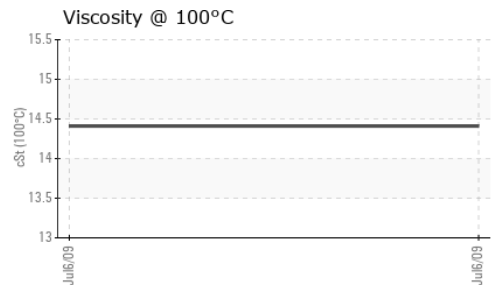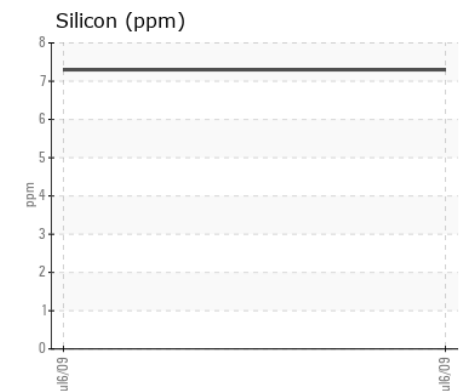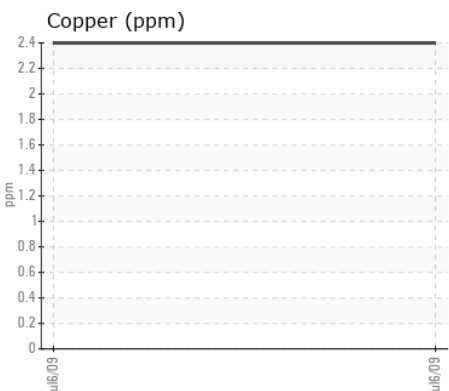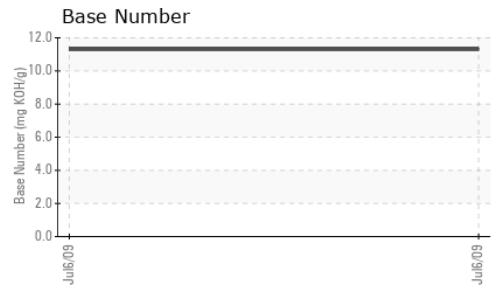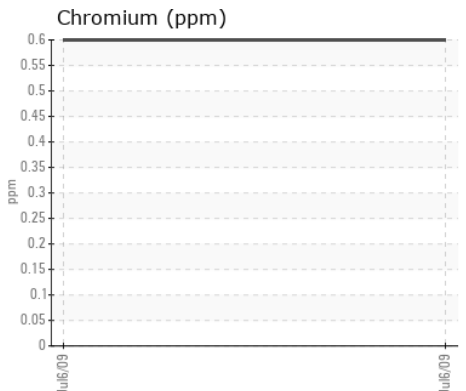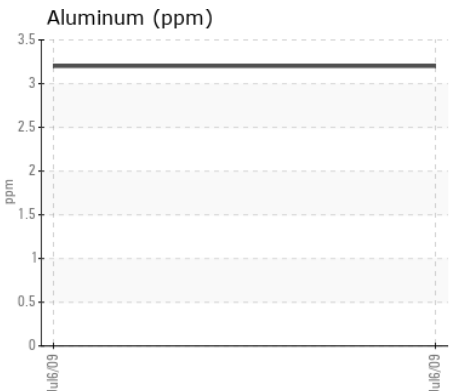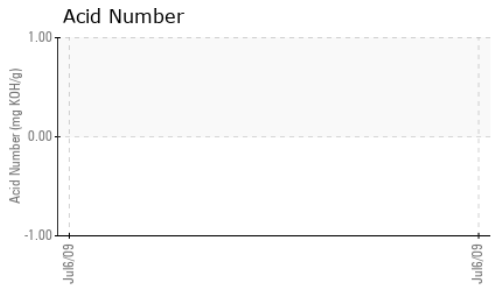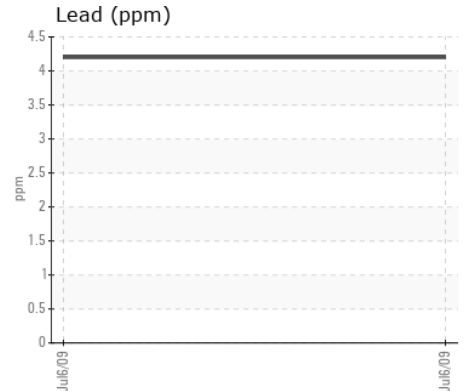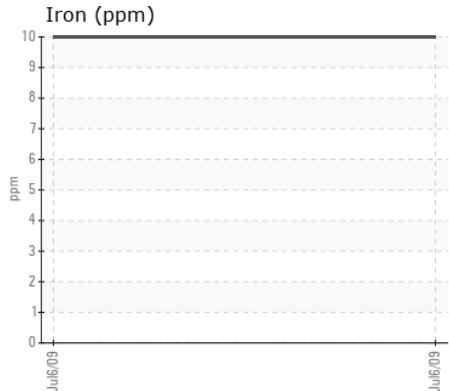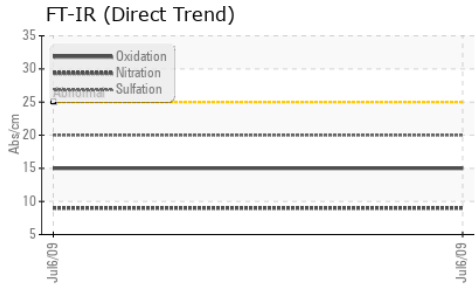

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR02435413 **Received** : 07 Jul 2009
Lab Number : 02435413 **Tested** : 08 Jul 2009
Unique Number : 4880147 **Diagnosed** : 08 Jul 2009 - Doug Bogart
Test Package : MOB 2 (Additional Tests: TAN Man)

JEROME SELF
P.O. BOX 682
MONTGOMERY, LA
US 71454
Contact: LEE LITTON

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: