



Machine Id
ELTEC MF MINIER
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Nous recommandons le remplacement des filtres de ce composant. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. À NOTER: S.V.P. inclure, avec le prochain échantillon, des détails de la capacité du réservoir et le type et le degré de filtration. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il y a une légère quantité de limon (particules de 4 à 14 microns) dans l'huile. La teneur en eau est négligeable.

FLUID CONDITION

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ST41325	---	---
Sample Date		Client Info		02 Feb 2021	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185(m)	>20	10	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>20	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>20	1	---	---
Copper	ppm	ASTM D5185(m)	>20	5	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>15	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water	%	ASTM D6304*	>0.05	0.001	---	---
ppm Water	ppm	ASTM D6304*	>500	6.7	---	---
Particles >4µm		ASTM D7647	>5000	▲ 5361	---	---
Particles >6µm		ASTM D7647	>1300	612	---	---
Particles >14µm		ASTM D7647	>160	52	---	---
Particles >21µm		ASTM D7647	>40	21	---	---
Particles >38µm		ASTM D7647	>10	5	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 20/16/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)		<1	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		128	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		3	---	---
Calcium	ppm	ASTM D5185(m)		29	---	---
Phosphorus	ppm	ASTM D5185(m)		479	---	---
Zinc	ppm	ASTM D5185(m)		483	---	---
Sulfur	ppm	ASTM D5185(m)		1398	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.76	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		28.3	---	---

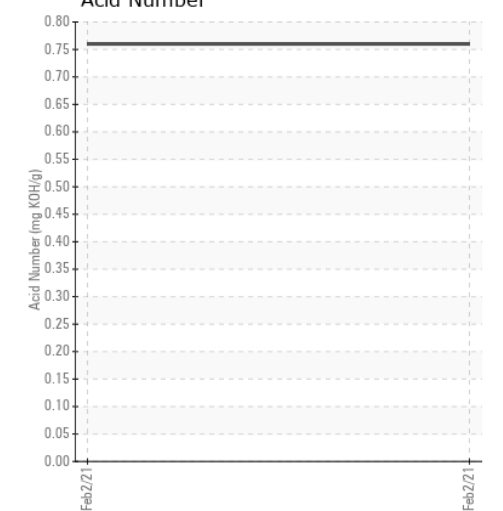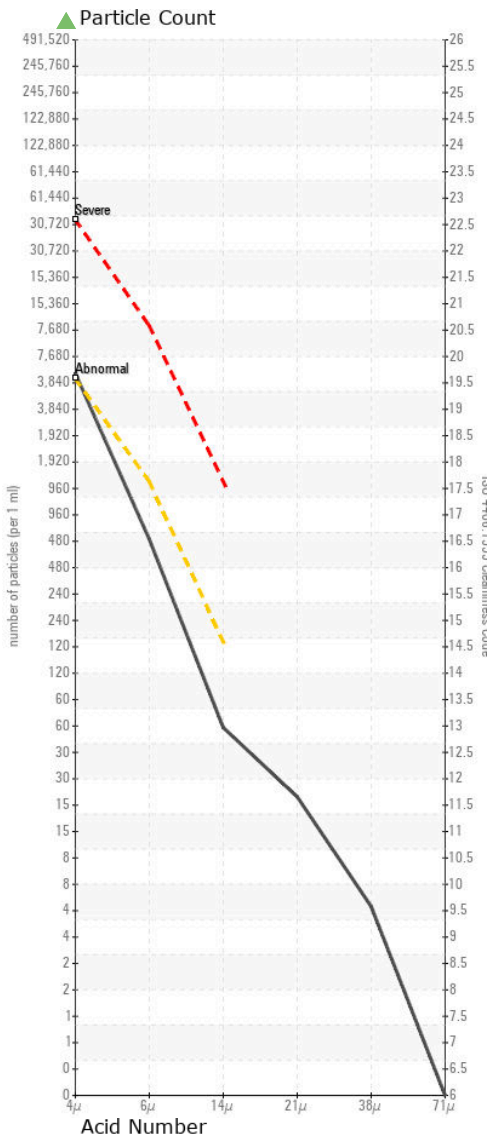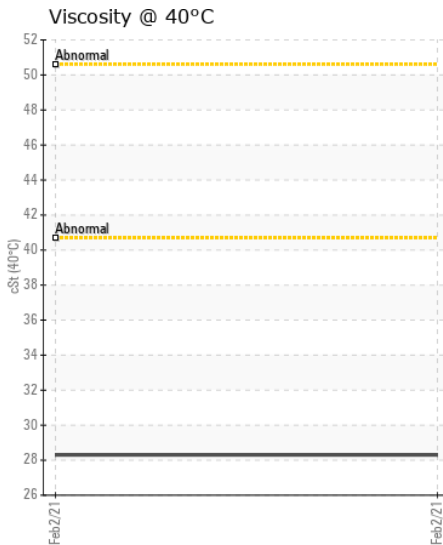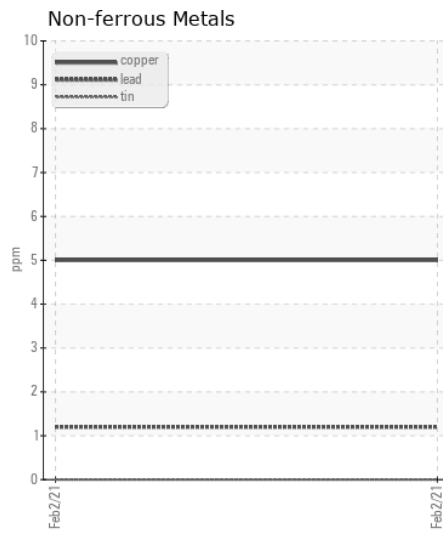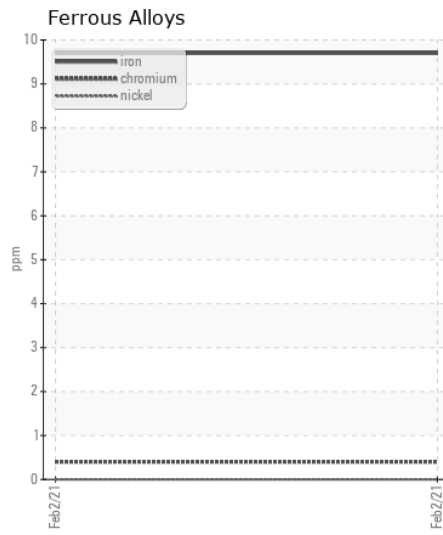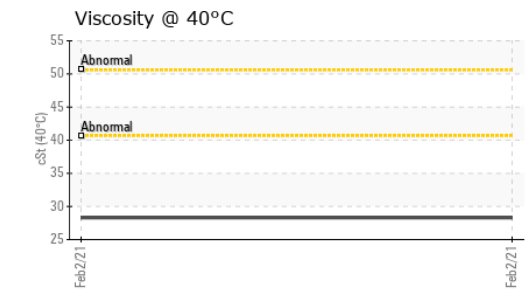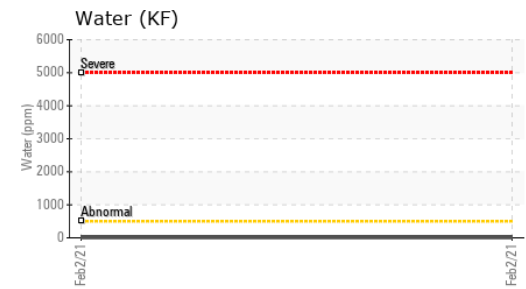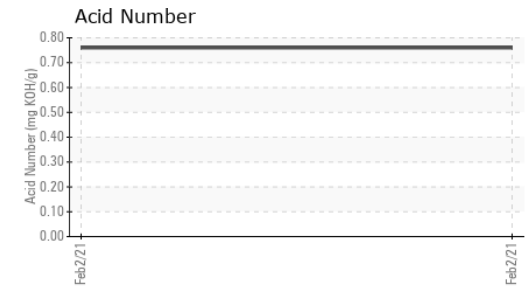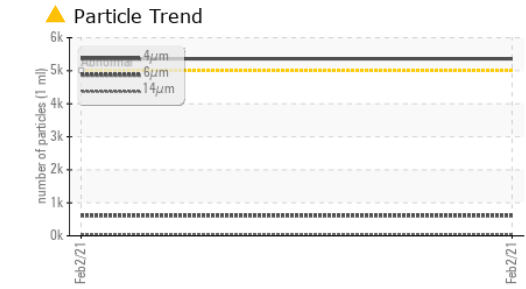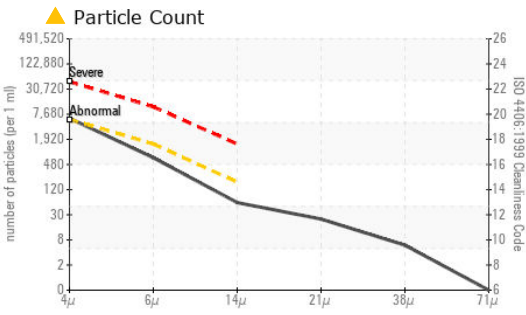

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ST41325 **Received** : 03 Feb 2021
Lab Number : 02401543 **Diagnosed** : 04 Feb 2021
Unique Number : 5173015 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KF, TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

HYDROMECH INC
 2921, BLVD WALLBERG
 DOLBEAU, QC
 CA G8L 1L6
 Contact: Melissa Dubois
 serviceadministrator@hydromec.ca
 T: (418)276-5831E x:t253
 F: (418)276-8166