



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(GMN 523) City Of Mount Pearl
Machine Id
INTERNATIONAL Side Loader Garbage Truck, 733
Component
Diesel Engine
Fluid
IRVING IDO PREMIUM PLUS 15W40 (24 LTR)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor. (Customer Sample
Comment: Serial # 3HAWGTAT9JL331062)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		OF0000265	OF0000252	---
Sample Date		Client Info		30 Mar 2021	08 Feb 2021	---
Machine Age	hrs	Client Info		3415	3289	---
Oil Age	hrs	Client Info		126	500	---
Filter Age	hrs	Client Info		126	500	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	8	14	---
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>2	<1	0	---
Silver	ppm	ASTM D5185(m)	>2	<1	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	3	4	---
Lead	ppm	ASTM D5185(m)	>40	0	<1	---
Copper	ppm	ASTM D5185(m)	>330	1	2	---
Tin	ppm	ASTM D5185(m)	>15	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	10	9	---
Potassium	ppm	ASTM D5185(m)	>20	<1	1	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>6	0.1	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	9.1	10.2	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.3	20.4	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The BN result indicates that there is suitable alkalinity remaining in the
oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		4	2	---
Boron	ppm	ASTM D5185(m)		42	39	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		8	16	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)		65	166	---
Calcium	ppm	ASTM D5185(m)		2103	1971	---
Phosphorus	ppm	ASTM D5185(m)		1050	1048	---
Zinc	ppm	ASTM D5185(m)		1170	1147	---
Sulfur	ppm	ASTM D5185(m)		3410	3256	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.5	14.4	---
Base Number (BN)	mg KOH/g	ASTM D2896*	10	7.28	7.09	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.3	14.5	14.2	---

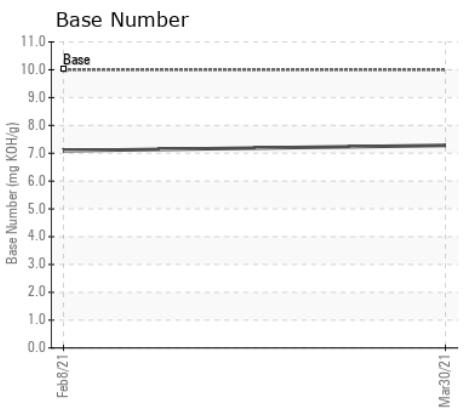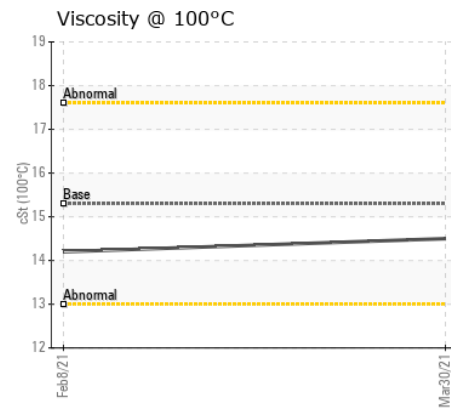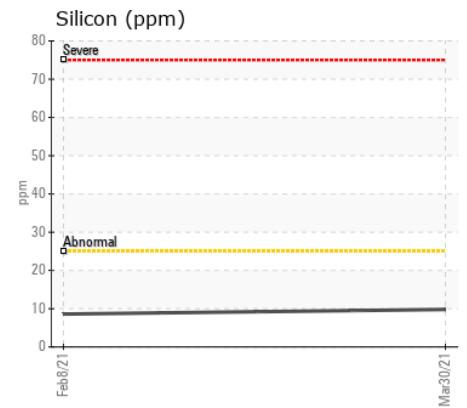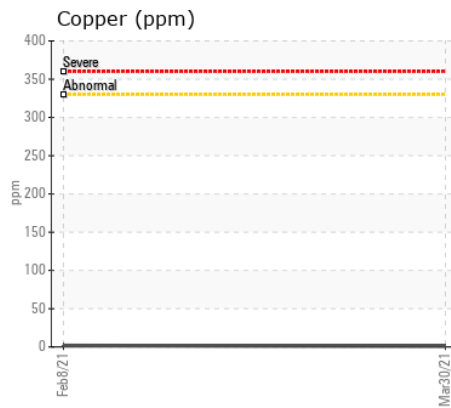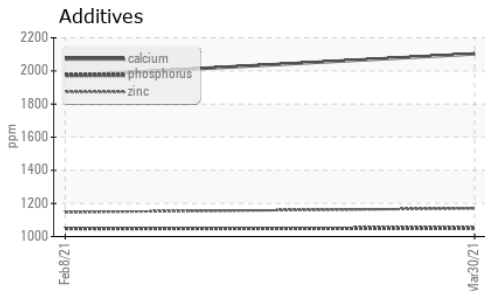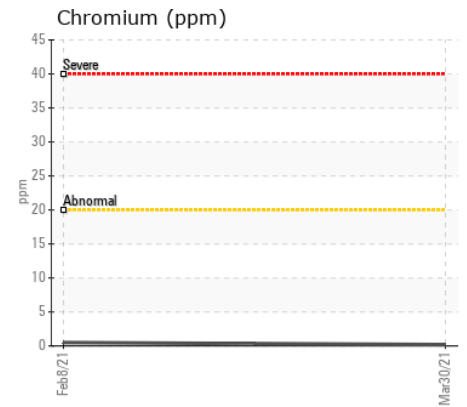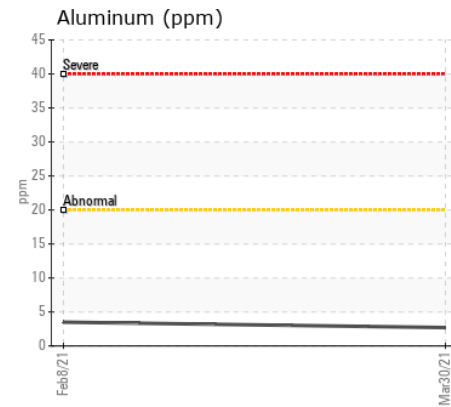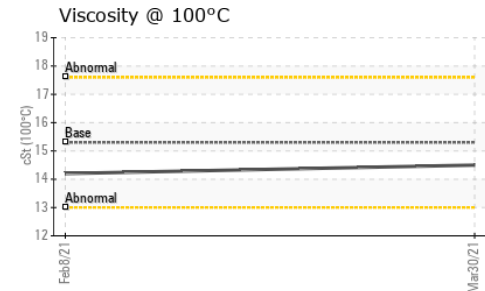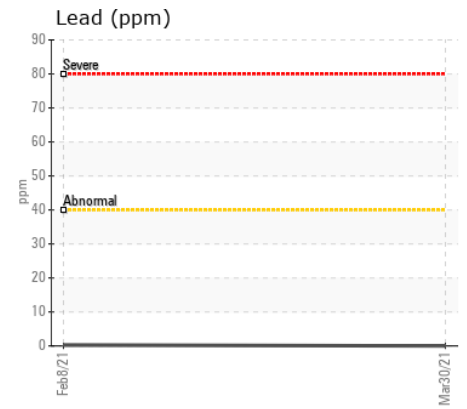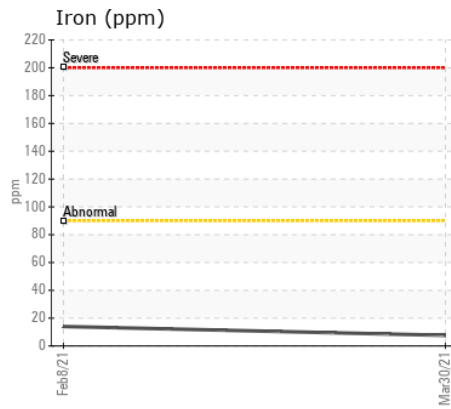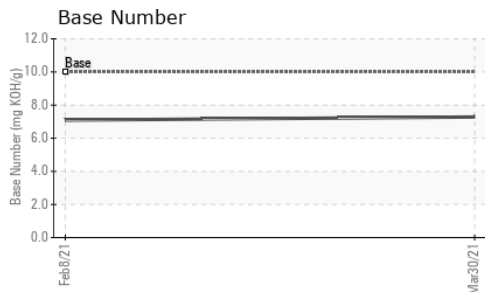

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0000265 **Received** : 09 Mar 2022
Lab Number : 02476443 **Tested** : 10 Mar 2022
Unique Number : 5369371 **Diagnosed** : 10 Mar 2022 - Kevin Marson
Test Package : MOB 2

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBUTLER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.