



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
City Of Mount Pearl
 Machine Id
INTERNATIONAL Flyer/Salter, 21-22D
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (24 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | OF0000535 | --- | --- |
| Sample Date | | Client Info | | 30 May 2022 | --- | --- |
| Machine Age | hrs | Client Info | | 917 | --- | --- |
| Oil Age | hrs | Client Info | | 917 | --- | --- |
| Filter Age | hrs | Client Info | | 917 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

Metal levels are typical for a components first oil change.

| | | | | | | |
|----------|-----|---------------|------|----|-----|-----|
| Iron | ppm | ASTM D5185(m) | >127 | 17 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >3 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >30 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >59 | 4 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >29 | 3 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >135 | 73 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >2 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |

CONTAMINATION











There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|---------------|------|------|-----|-----|
| Silicon | ppm | ASTM D5185(m) | >18 | 8 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 6 | --- | --- |
| Fuel | | WC Method | >3.0 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | ASTM D7844* | >6 | 0 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* | >20 | 6.7 | --- | --- |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 20.6 | --- | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|---------------|------|------|-----|-----|
| Sodium | ppm | ASTM D5185(m) | >158 | 2 | --- | --- |
| Boron | ppm | ASTM D5185(m) | 250 | 6 | --- | --- |
| Barium | ppm | ASTM D5185(m) | 10 | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | 100 | 52 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 1 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | 450 | 947 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | 3000 | 1034 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 1027 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | 1350 | 1122 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | 4250 | 2569 | --- | --- |
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 14.6 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896* | 8.5 | 9.31 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | 14.4 | 14.3 | --- | --- |

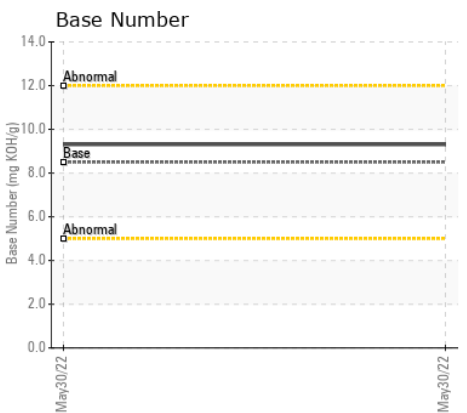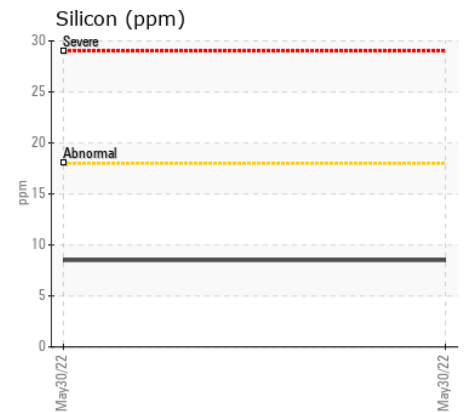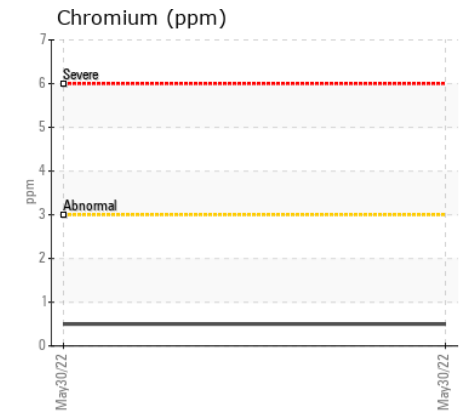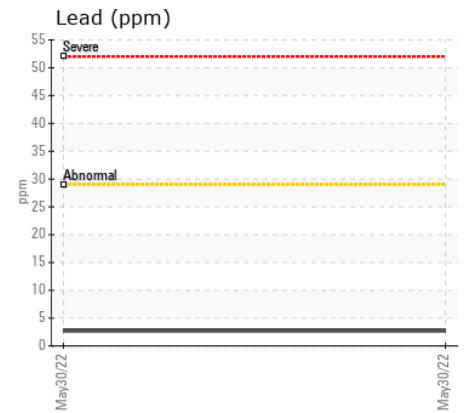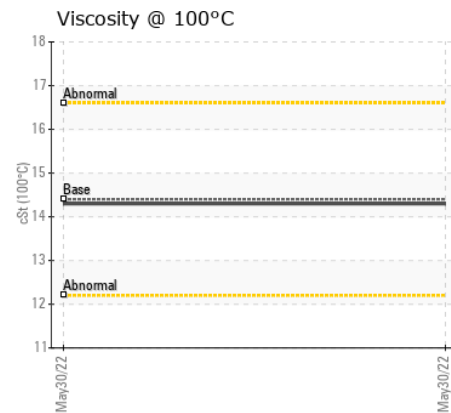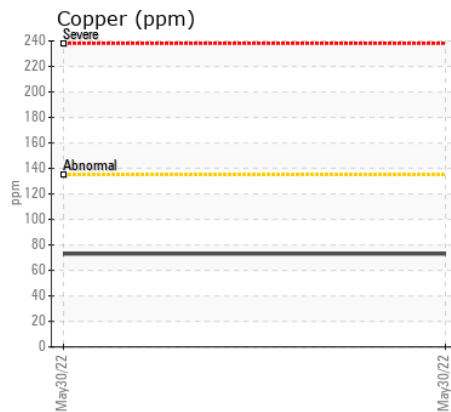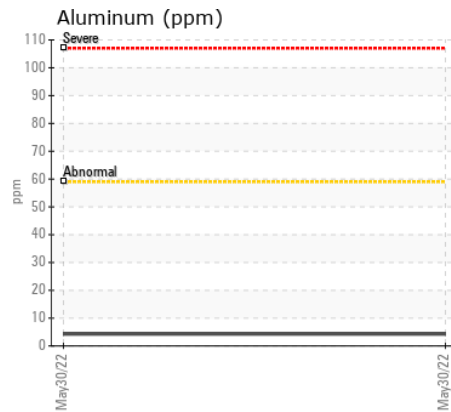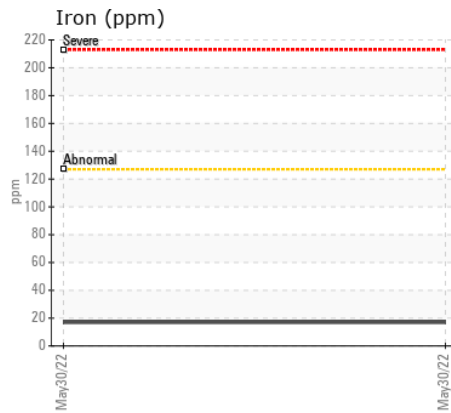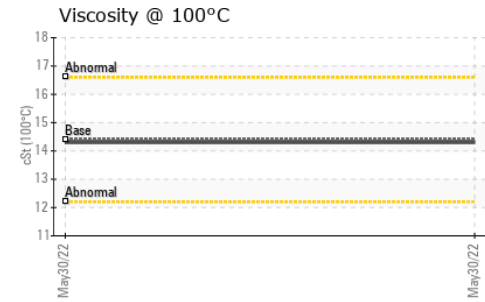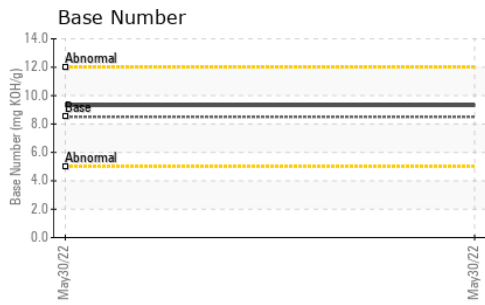

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0000535 **Received** : 13 Jun 2022
Lab Number : 02494365 **Tested** : 14 Jun 2022
Unique Number : 5411324 **Diagnosed** : 14 Jun 2022 - Wes Davis
Test Package : MOB 2

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBUTLER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.