



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
City Of Mount Pearl
 Machine Id
INTERNATIONAL Flyer/Salter, 21-21D
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (24 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		OF0000533	---	---
Sample Date		Client Info		30 May 2022	---	---
Machine Age	hrs	Client Info		841	---	---
Oil Age	hrs	Client Info		841	---	---
Filter Age	hrs	Client Info		153	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185(m)	>90	20	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)	>40	4	---	---
Copper	ppm	ASTM D5185(m)	>330	122	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>6	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.7	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>158	3	---	---
Boron	ppm	ASTM D5185(m)	250	8	---	---
Barium	ppm	ASTM D5185(m)	10	1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	51	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)	450	953	---	---
Calcium	ppm	ASTM D5185(m)	3000	1063	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	1024	---	---
Zinc	ppm	ASTM D5185(m)	1350	1137	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2595	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	9.32	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.3	---	---

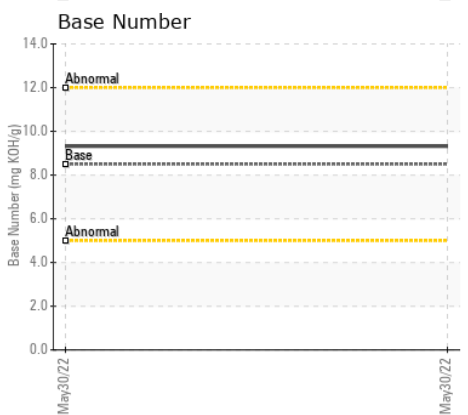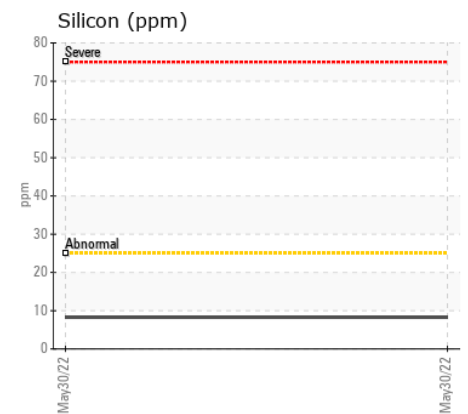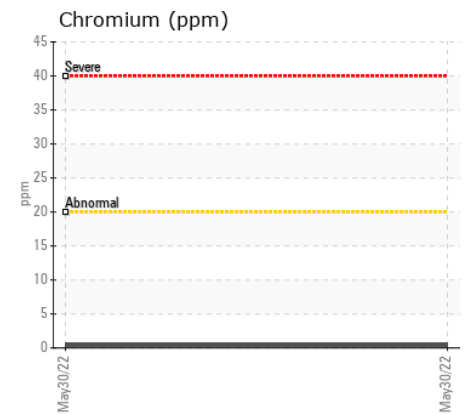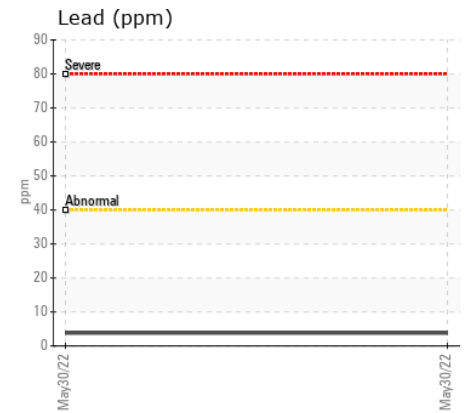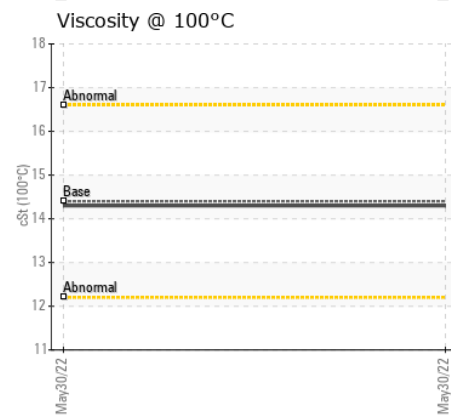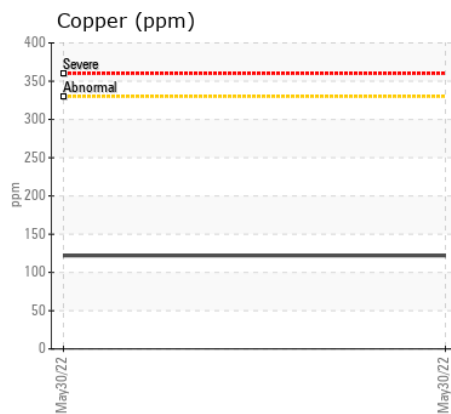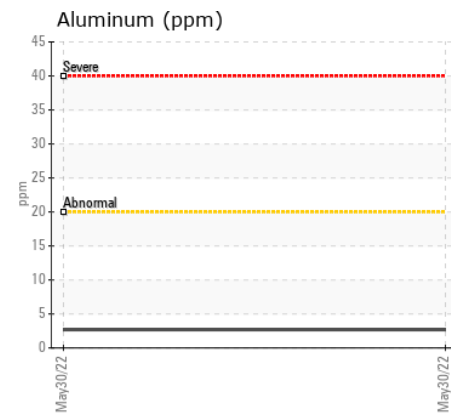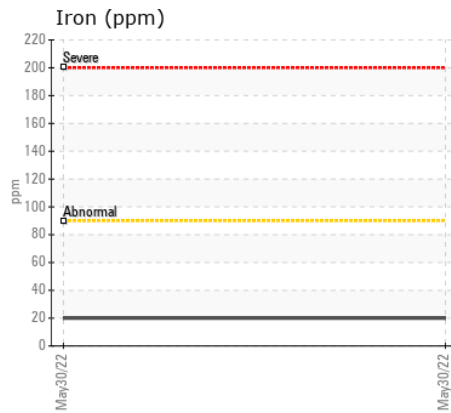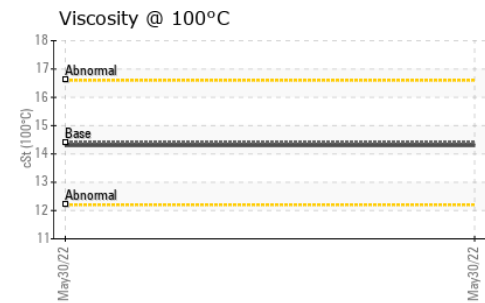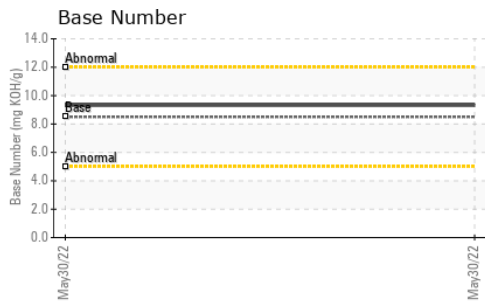

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0000533
Lab Number : 02494366
Unique Number : 5411325
Test Package : MOB 2
Received : 13 Jun 2022
Tested : 14 Jun 2022
Diagnosed : 14 Jun 2022 - Wes Davis

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBUTLER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.