



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area
City Of Mount Pearl
 Machine Id
INTERNATIONAL Flyer/Salter, 21-19D
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 32 (239 LTR)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. (Customer Sample Comment: G2F Installed)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		OF0000229	---	---
Sample Date		Client Info		14 Oct 2021	---	---
Machine Age	hrs	Client Info		782	---	---
Oil Age	hrs	Client Info		47	---	---
Filter Age	hrs	Client Info		47	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	<1	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)		<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	0	---	---
Lead	ppm	ASTM D5185(m)	>10	2	---	---
Copper	ppm	ASTM D5185(m)	>75	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION








There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	6456	---	---
Particles >6µm		ASTM D7647	>1300	951	---	---
Particles >14µm		ASTM D7647	>160	105	---	---
Particles >21µm		ASTM D7647	>40	32	---	---
Particles >38µm		ASTM D7647	>10	4	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/17/14	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		0	---	---
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	6	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	0	---	---
Calcium	ppm	ASTM D5185(m)	50	6	---	---
Phosphorus	ppm	ASTM D5185(m)	330	424	---	---
Zinc	ppm	ASTM D5185(m)	430	445	---	---
Sulfur	ppm	ASTM D5185(m)	760	911	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	31.5	33.0	---	---

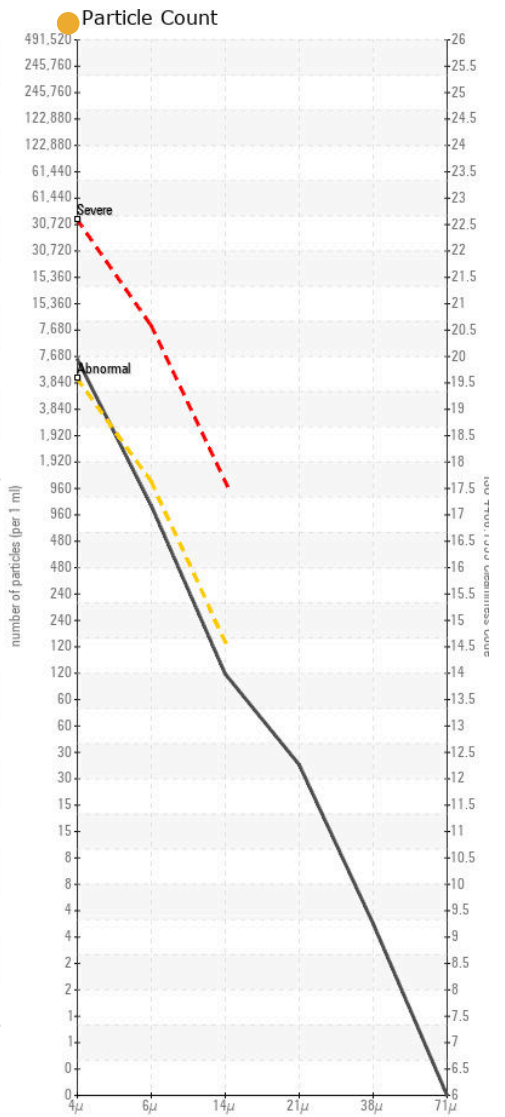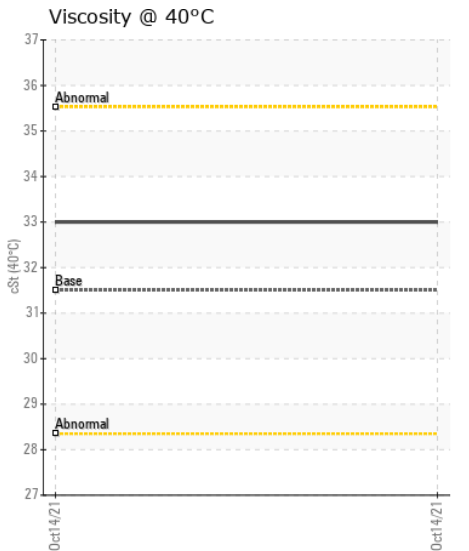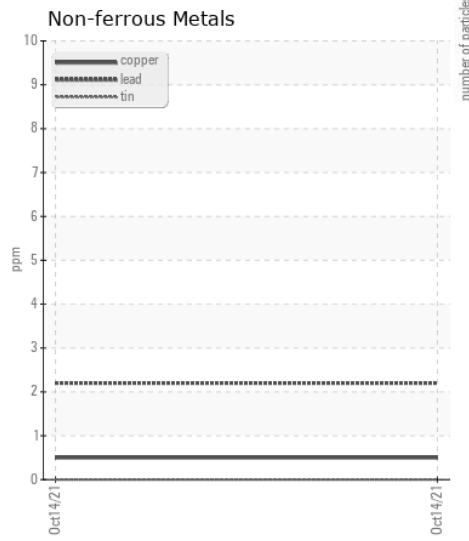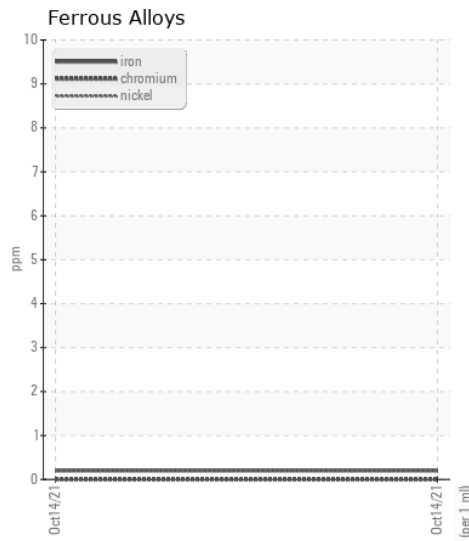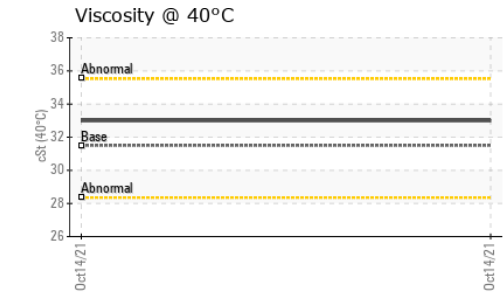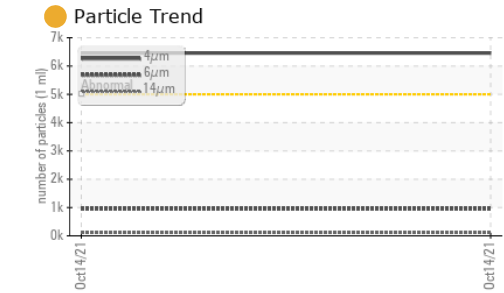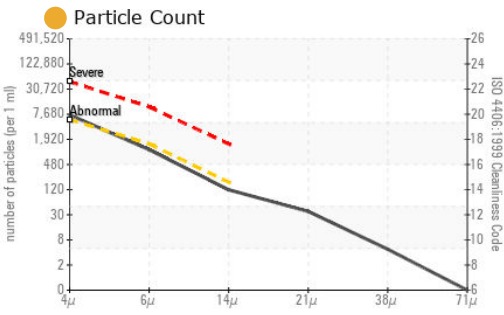

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0000229
Lab Number : **02494502**
Unique Number : 5411461
Test Package : MOB 2

Received : 13 Jun 2022
Tested : 14 Jun 2022
Diagnosed : 14 Jun 2022 - Kevin Marson

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBTULER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.