



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH26M 124532-1252
Component
Diesel Engine
Fluid
SAE 10W40 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0240687	LH0180988	LH0180987
Sample Date		Client Info		06 Sep 2022	04 Apr 2022	16 Nov 2021
Machine Age	hrs	Client Info		2544	1978	1464
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	17	12
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	1	2	2
Lead	ppm	ASTM D5185(m)	>30	1	2	<1
Copper	ppm	ASTM D5185(m)	>125	7	9	11
Tin	ppm	ASTM D5185(m)	>5	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	23	23	7
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.0	10.1	8.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.5	24.3	22.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>401	3	2	2
Boron	ppm	ASTM D5185(m)		1	2	2
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		63	67	64
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		1045	1134	1102
Calcium	ppm	ASTM D5185(m)		1193	1180	1141
Phosphorus	ppm	ASTM D5185(m)		1134	1195	1106
Zinc	ppm	ASTM D5185(m)		1292	1401	1323
Sulfur	ppm	ASTM D5185(m)		2546	2628	2610
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.7	20.5	18.2
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.5	14.4	13.9

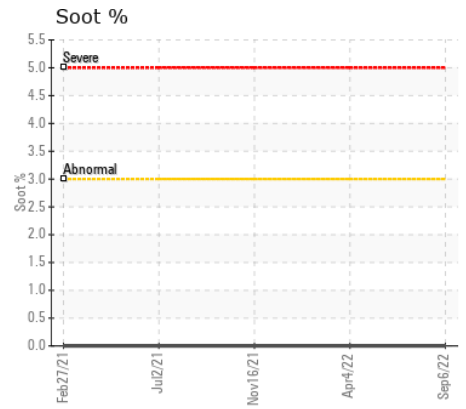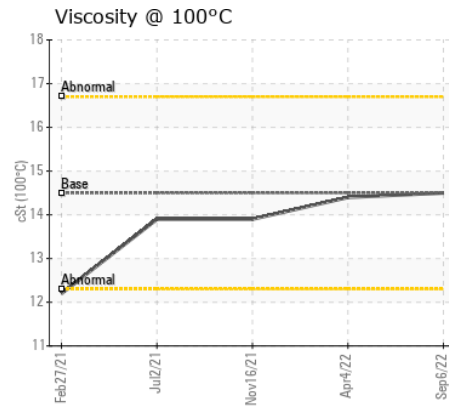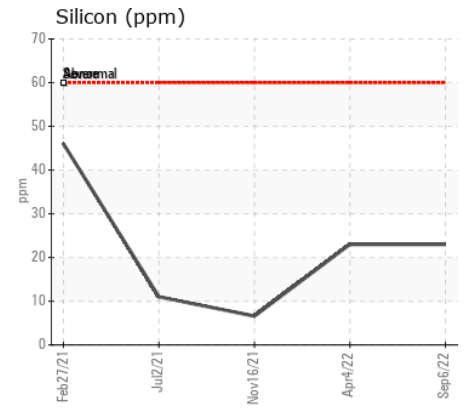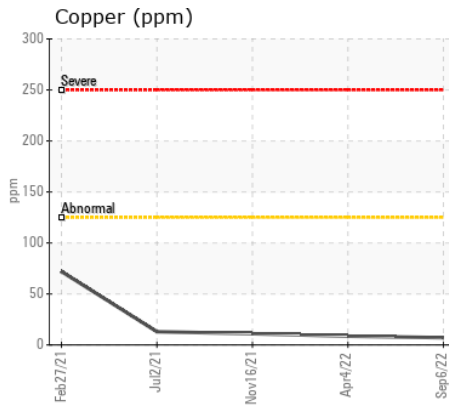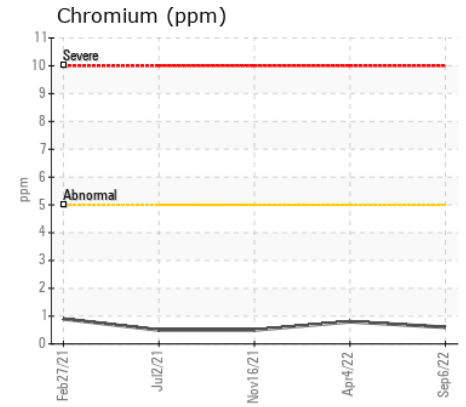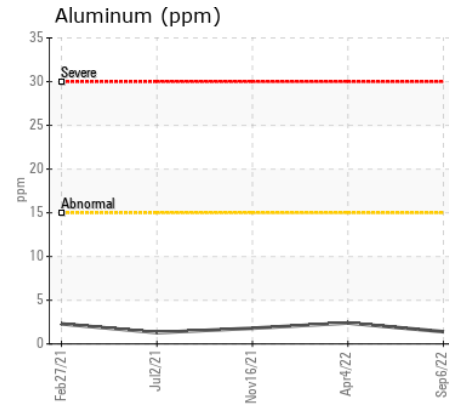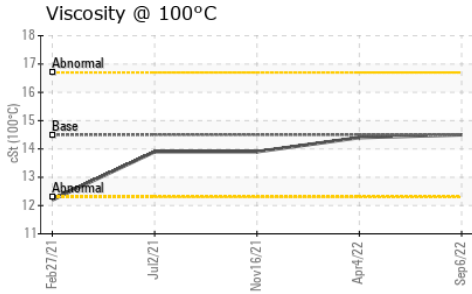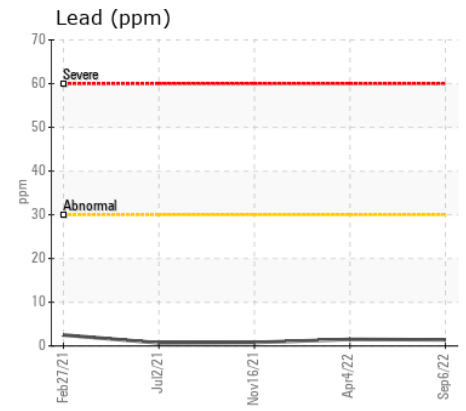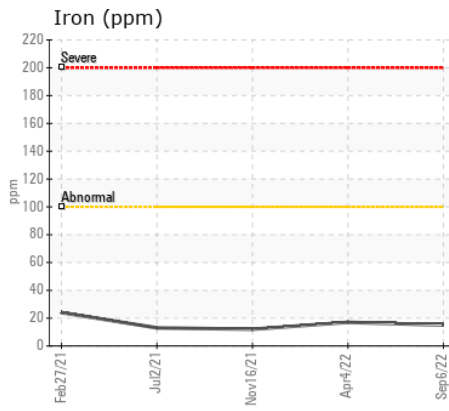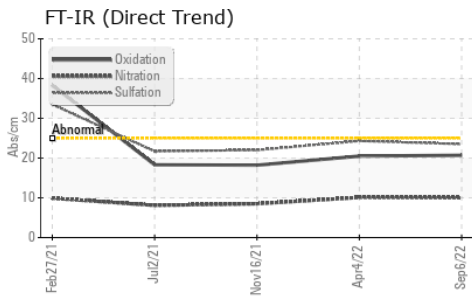

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0240687 **Received** : 13 Sep 2022
Lab Number : 02510359 **Tested** : 13 Sep 2022
Unique Number : 5451329 **Diagnosed** : 13 Sep 2022 - Wes Davis
Test Package : MOB 1

Amix Recycling
 11698 140 Street
 Surrey, BC
 CA V3R 2V4
 Contact: Kenji Wong
 kwong@amixgroup.ca
 T:
 F: (250)802-1002

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.