



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id  
**22C#04**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

## FLUID CONDITION

Viscosity of sample indicates oil is within ISO 22 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0627026	---	---
Sample Date		Client Info		18 Oct 2022	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185(m)	>20	<1	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	0	---	---
Lead	ppm	ASTM D5185(m)	>20	<1	---	---
Copper	ppm	ASTM D5185(m)	>20	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>15	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>5000	5288	---	---
Particles >6µm		ASTM D7647	>1300	806	---	---
Particles >14µm		ASTM D7647	>160	12	---	---
Particles >21µm		ASTM D7647	>40	2	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/17/11	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Sodium	ppm	ASTM D5185(m)		0	---	---
Boron	ppm	ASTM D5185(m)		0	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		111	---	---
Phosphorus	ppm	ASTM D5185(m)		247	---	---
Zinc	ppm	ASTM D5185(m)		299	---	---
Sulfur	ppm	ASTM D5185(m)		841	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.40	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		22.7	---	---

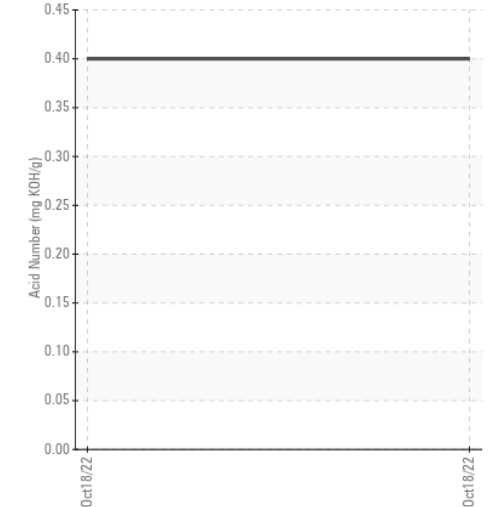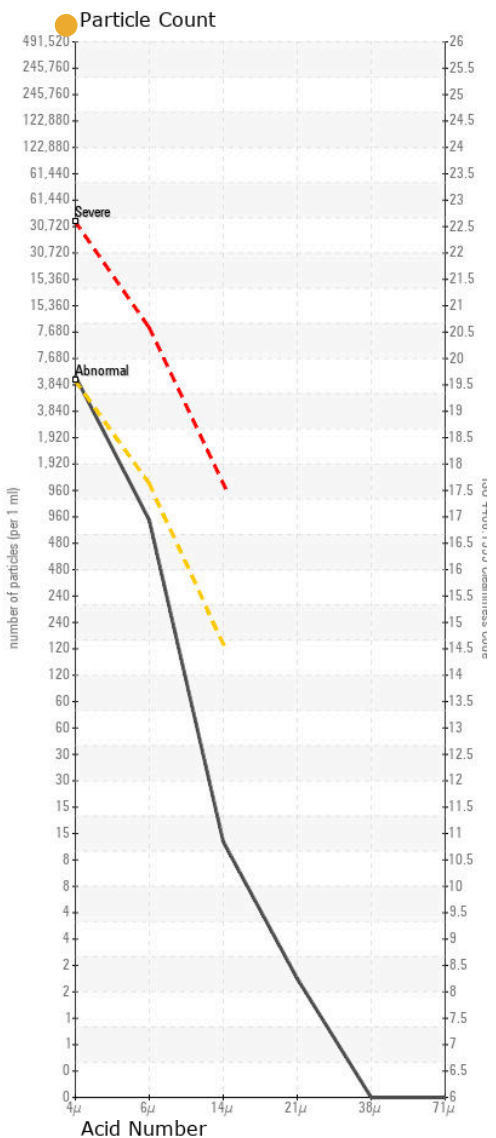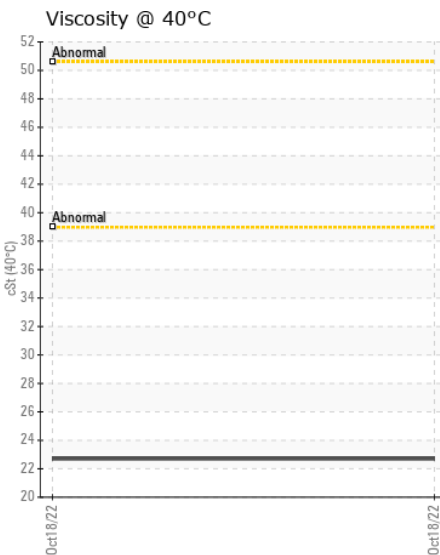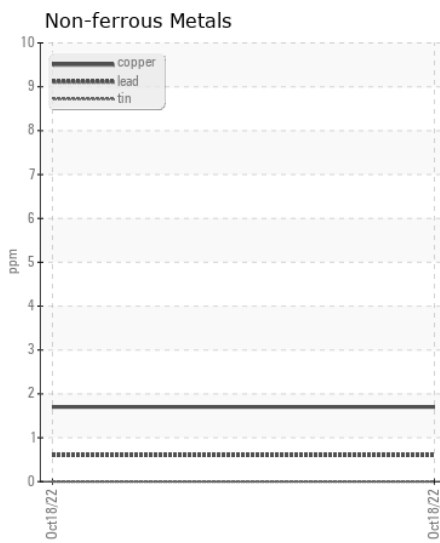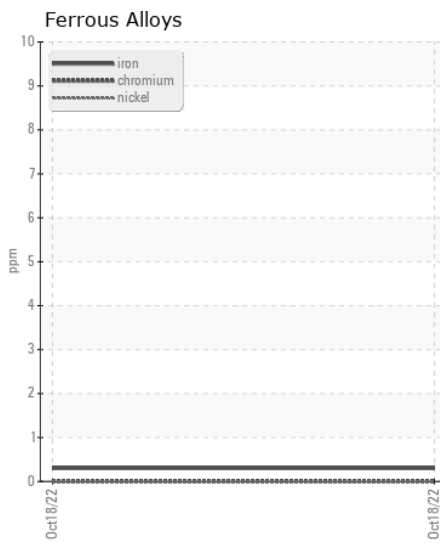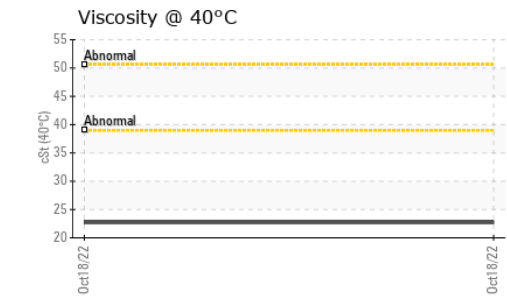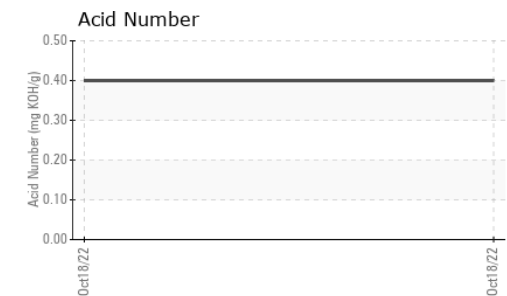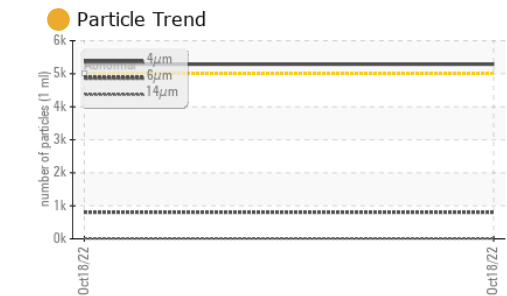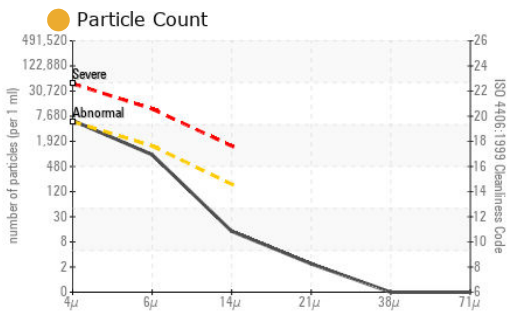

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0627026  
**Lab Number** : 02519415  
**Unique Number** : 5476395  
**Test Package** : MAR 2  
**Received** : 28 Oct 2022  
**Tested** : 31 Oct 2022  
**Diagnosed** : 31 Oct 2022 - Kevin Marson

**Canadian Coast Guard**  
 CCGS Amundsen, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Chief Engineer  
 amundsense@ccgs-ngcc.gc.ca  
 T: (418)953-8233  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.