



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TJ024255
 Component
Diesel Engine
 Fluid
SAE 15W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0358451	---	---
Sample Date		Client Info		08 Nov 2022	---	---
Machine Age	hrs	Client Info		691	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	4	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	5	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	5.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.4	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		173	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		64	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		311	---	---
Calcium	ppm	ASTM D5185(m)		1640	---	---
Phosphorus	ppm	ASTM D5185(m)		943	---	---
Zinc	ppm	ASTM D5185(m)		1050	---	---
Sulfur	ppm	ASTM D5185(m)		2651	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		8.53	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.0	13.8	---	---

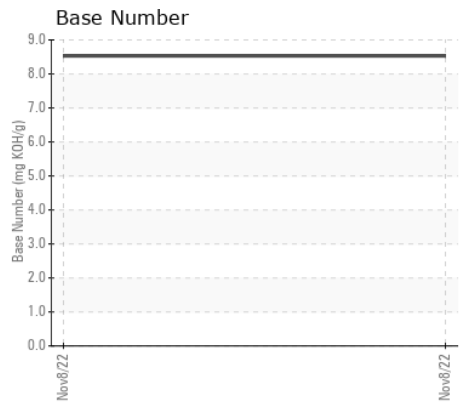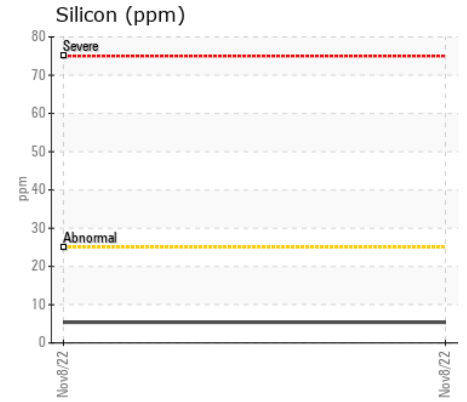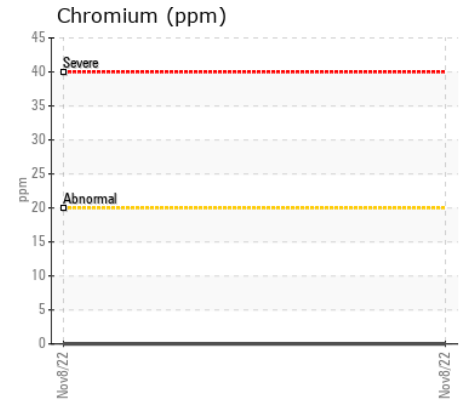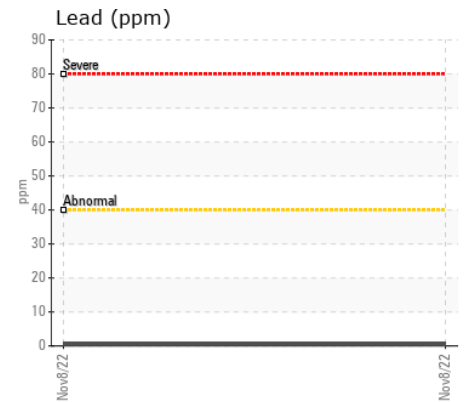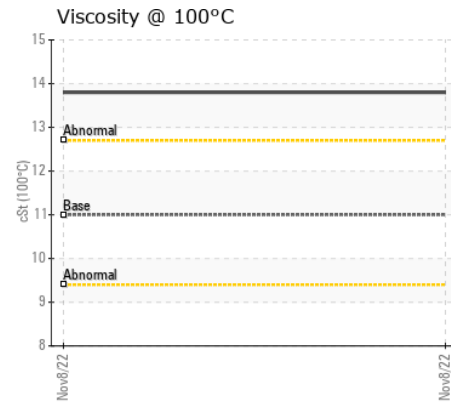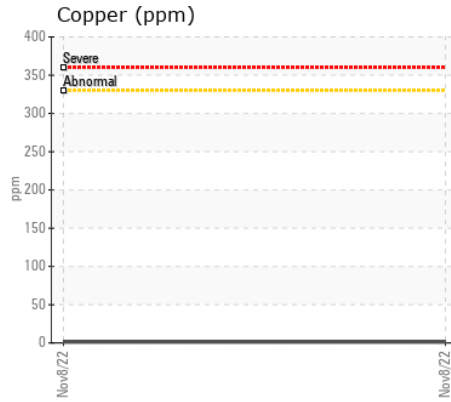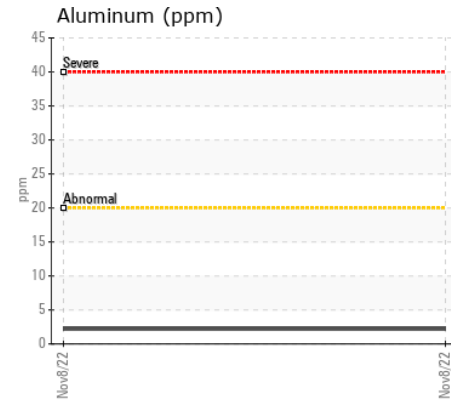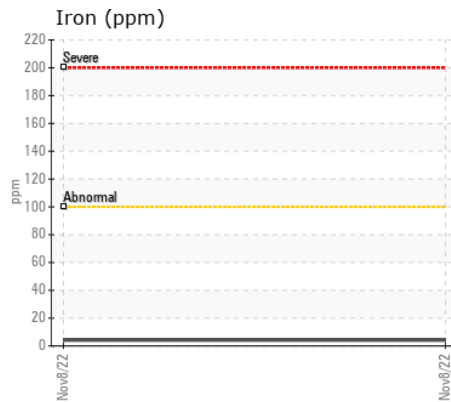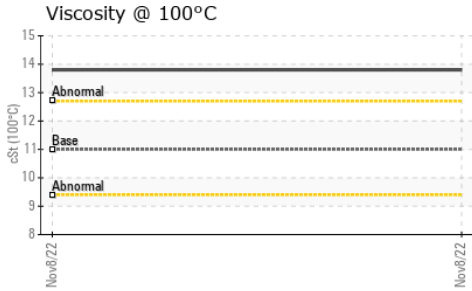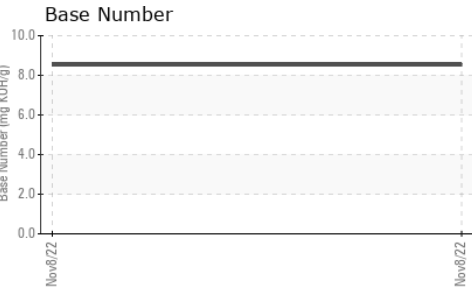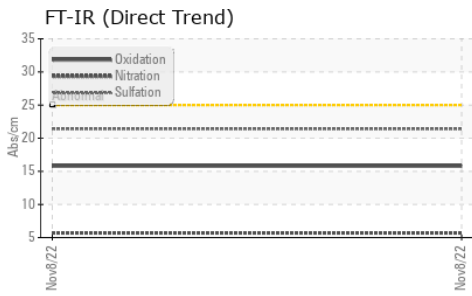

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0358451 **Received** : 10 Nov 2022
Lab Number : 02521909 **Tested** : 10 Nov 2022
Unique Number : 5486890 **Diagnosed** : 11 Nov 2022 - Kevin Marson
Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GENREP LTD.
 121 WATLINE AVENUE
 MISSISSAUGA, ON
 CA L4Z 1P2
 Contact: Amit Singh
 asingh@genrep.com
 T: (905)502-9950
 F: (905)502-9960