



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH26M 124532-1252
Component
Diesel Engine
Fluid
SAE 10W40 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0181004	LH0240687	LH0180988
Sample Date		Client Info		10 Jan 2023	06 Sep 2022	04 Apr 2022
Machine Age	hrs	Client Info		3035	2544	1978
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	12	15	17
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)		<1	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	2	1	2
Lead	ppm	ASTM D5185(m)	>30	<1	1	2
Copper	ppm	ASTM D5185(m)	>125	3	7	9
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	7	23	23
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	9.3	10.0	10.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.8	23.5	24.3
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>401	2	3	2
Boron	ppm	ASTM D5185(m)		1	1	2
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		63	63	67
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		1052	1045	1134
Calcium	ppm	ASTM D5185(m)		1196	1193	1180
Phosphorus	ppm	ASTM D5185(m)		1148	1134	1195
Zinc	ppm	ASTM D5185(m)		1294	1292	1401
Sulfur	ppm	ASTM D5185(m)		2678	2546	2628
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.3	20.7	20.5
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.3	14.5	14.4

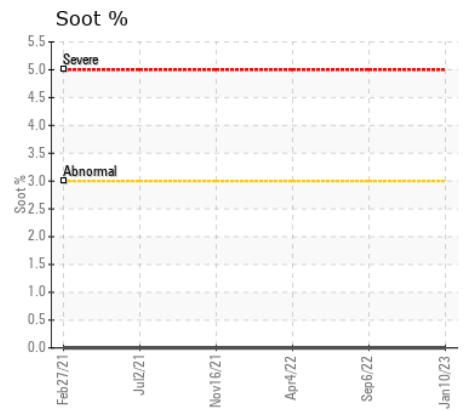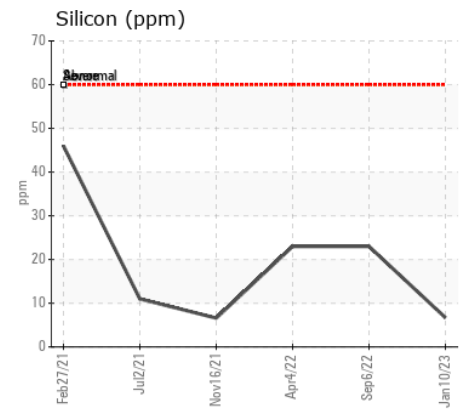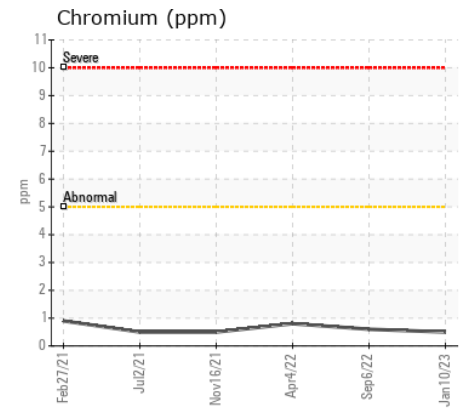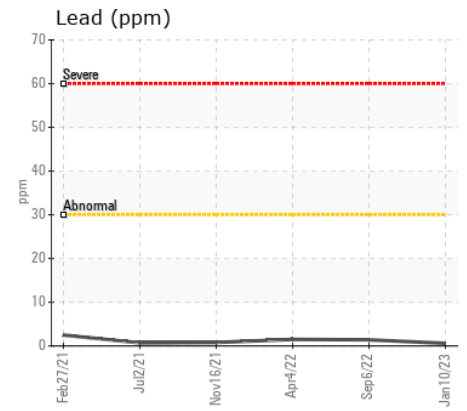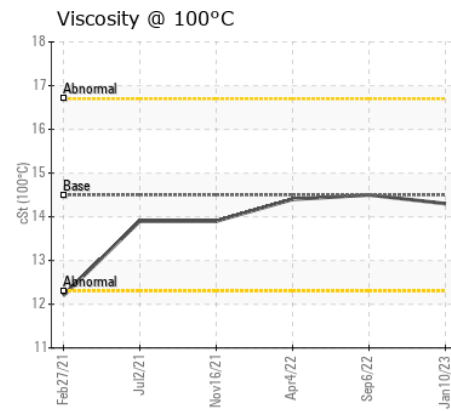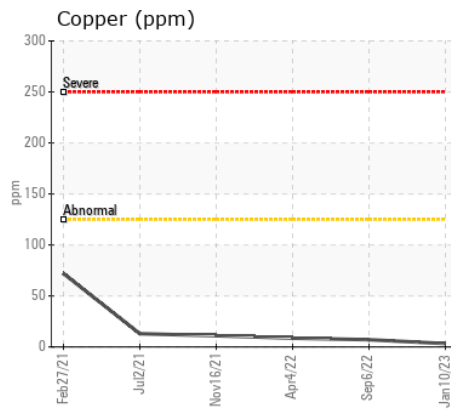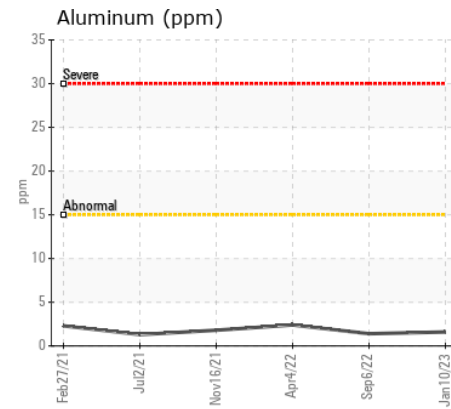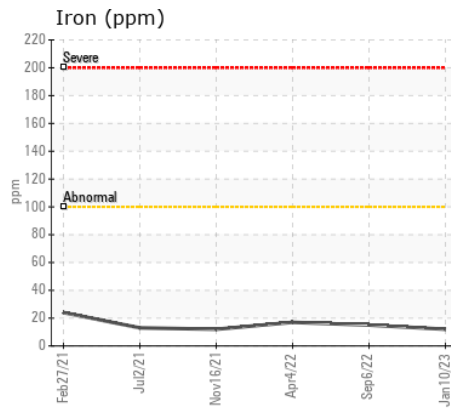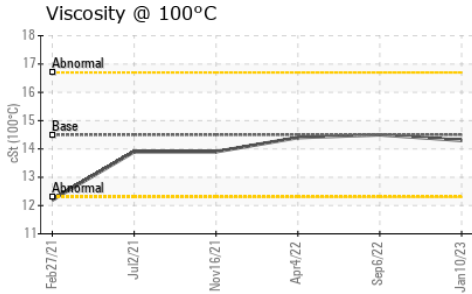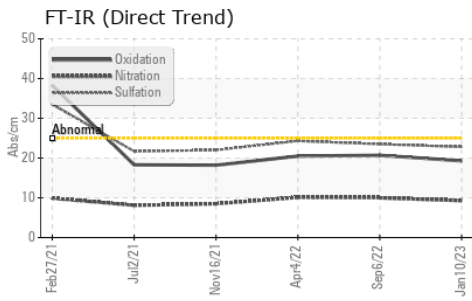

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0181004 **Received** : 13 Jan 2023
Lab Number : 02533010 **Tested** : 13 Jan 2023
Unique Number : 5514009 **Diagnosed** : 13 Jan 2023 - Wes Davis
Test Package : MOBCE (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Amix Recycling
 11698 140 Street
 Surrey, BC
 CA V3R 2V4
 Contact: K. Wong
 kwong@amixgroup.ca
 T:
 F: (250)802-1002