**WEAR CONTAMINANTS OIL CONDITION**  **NORMAL NORMAL NORMAL** 

## Ship Service Generator #3 (S/N 15501188)

## Diesel Engine

PETRO CANADA DURON HP 15W40 (62 LTR)

DE			IDA.	TION
	CUI	mv = 1	AUK	TION


Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample.


Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0700696		
Sample Date		Client Info		26 Feb 2023		
Machine Age	hrs	Client Info		50475		
Oil Age	hrs	Client Info		511		
Filter Age	hrs	Client Info		511		
Oil Changed		Client Info		Changed		
Filter Changed		Client Info		Changed		
Sample Status				NORMAL		
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>100	18		

## WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

	*				





Oil Age	hrs	Client Info		511	 
Filter Age	hrs	Client Info		511	 
Oil Changed		Client Info		Changed	 
Filter Changed		Client Info		Changed	 
Sample Status				NORMAL	 
		AOTIA DOLOAS			 
PQ		ASTM D8184*	400	0	 
Iron	ppm	ASTM D5185(m)	>100	18	 
Chromium	ppm	ASTM D5185(m)	>20	<1	 
Nickel	ppm	ASTM D5185(m)	>4	<1	 
Titanium	ppm	ASTM D5185(m)		<1	 
Silver	ppm	ASTM D5185(m)	>3	0	 
Aluminum	ppm	ASTM D5185(m)	>20	1	 
Lead	ppm	ASTM D5185(m)	>40	1	 
Copper	ppm	ASTM D5185(m)	>330	3	 
Tin	ppm	ASTM D5185(m)	>15	<1	 
Vanadium	ppm	ASTM D5185(m)		0	 
Large Particles		DR-Ferr*		7.2	 
Small Particles		DR-Ferr*		5.7	 
Total Particles		DR-Ferr*	>	12.9	 
Large Particles Percentage	%	DR-Ferr*		11.6	 
Severity Index		DR-Ferr*		11	 
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	
Ferrous Sliding	Scale 0-10	ASTM D7684*			
Ferrous Cutting	Scale 0-10	ASTM D7684*			
Ferrous Rolling		AOTH DIOOT			
	Scale 0-10	ASTM D7684*		1	
Ferrous Break-in	Scale 0-10 Scale 0-10			1	
Ferrous Break-in Ferrous Spheres	Scale 0-10	ASTM D7684*		1	
	Scale 0-10	ASTM D7684* ASTM D7684*		1	
Ferrous Spheres	Scale 0-10 Scale 0-10	ASTM D7684* ASTM D7684* ASTM D7684*		1	
Ferrous Spheres Ferrous Black Oxides	Scale 0-10 Scale 0-10 Scale 0-10	ASTM D7684* ASTM D7684* ASTM D7684* ASTM D7684*		1	
Ferrous Spheres Ferrous Black Oxides Ferrous Red Oxides	Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10	ASTM D7684* ASTM D7684* ASTM D7684* ASTM D7684* ASTM D7684*		1	
Ferrous Spheres Ferrous Black Oxides Ferrous Red Oxides Ferrous Corrosive	Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10	ASTM D7684* ASTM D7684* ASTM D7684* ASTM D7684* ASTM D7684* ASTM D7684*		1	
Ferrous Spheres Ferrous Black Oxides Ferrous Red Oxides Ferrous Corrosive Ferrous Other	Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10 Scale 0-10	ASTM D7684*		1	
Ferrous Spheres Ferrous Black Oxides Ferrous Red Oxides Ferrous Corrosive Ferrous Other Nonferrous Rubbing	Scale 0-10	ASTM D7684*		1	
Ferrous Spheres Ferrous Black Oxides Ferrous Red Oxides Ferrous Corrosive Ferrous Other Nonferrous Rubbing Nonferrous Sliding	Scale 0-10	ASTM D7684*		1	

## **CONTAMINANTS** Silicon ASTM D5185(m) >25 2 ppm There is no indication of any contamination in the oil. Potassium ASTM D5185(m) >20 <1 ppm Fuel WC Method >5 <1.0 Water WC Method >0.2 **NEG** NEG Glycol WC Method Soot % % ASTM D7844\* >3 0.1 Nitration Abs/cm ASTM D7624\* >20 7.7 Sulfation Abs/.1mm ASTM D7415\* >30 23.2 **Emulsified Water** scalar Visual\* >0.2 NEG ASTM D7684\* Carbonaceous Material Scale 0-10 Sand/Dirt Scale 0-10 ASTM D7684\* Fibres Scale 0-10 ASTM D7684\* **Spheres** Scale 0-10 ASTM D7684\* Other ASTM D7684\* 1 Scale 0-10 **OIL CONDITION** Sodium 2 ASTM D5185(m) ppm The BN result indicates that there is suitable alkalinity remaining in the Boron ASTM D5185(m) O ppm 3 oil. The condition of the oil is suitable for further service. Barium ppm ASTM D5185(m) O 0 Molybdenum ASTM D5185(m) 60 65 ppm ASTM D5185(m) O Manganese ppm <1 Magnesium ASTM D5185(m) 1010 1063 ppm Calcium ASTM D5185(m) 1198 ppm 1070 Phosphorus ASTM D5185(m) 1150 1130 ppm Zinc ASTM D5185(m) 1270 1288 ppm

Sulfur

Oxidation

Base Number (BN)

Visc @ 100°C

Lubricant Degradation Scale 0-10

ppm

Abs/.1mm

mg KOH/g

cSt

ASTM D5185(m)

ASTM D7414\*

ASTM D2896\*

ASTM D7279(m)

ASTM D7684\*

2060

>25

9.8


15.6

2628

16.1

8.91

14.9

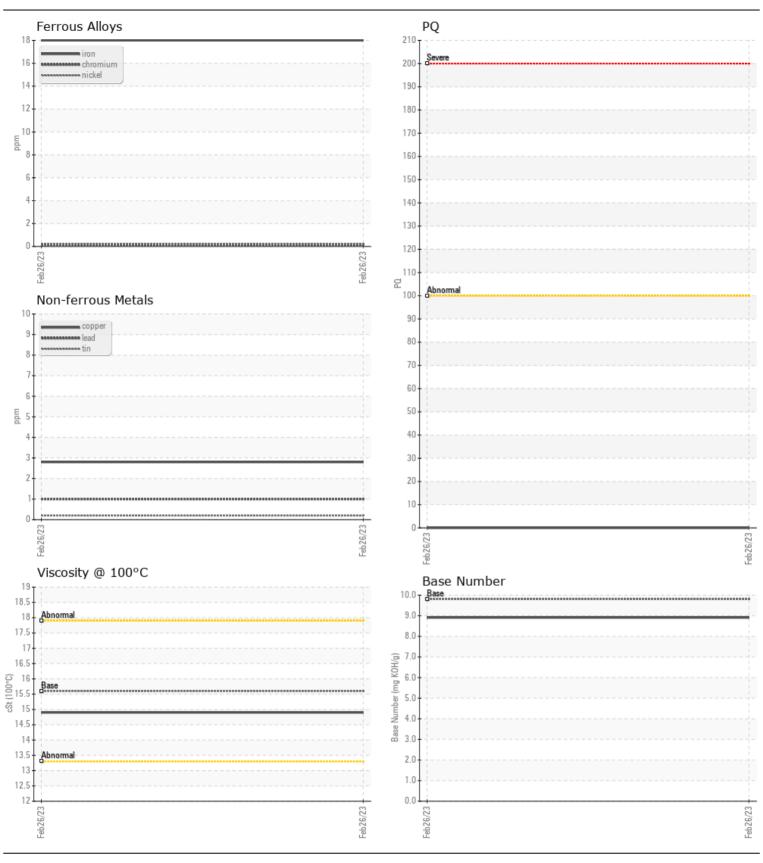



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No.

: WC0700696 Lab Number : 02545376

Unique Number : 5542381 Test Package : MAR 3

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 15 Mar 2023 Received **Tested** : 20 Mar 2023

Diagnosed : 21 Mar 2023 - Kevin Marson

CCGS GRIFFON, PO BOX 1000, 401 KING ST.W

Prescott, ON **CA K6V 5T3** Contact: Senior Engineer griffonse@ccgs-ngcc.gc.ca T: (519)312-1045 F: (519)312-1045

**CANADIAN COAST GUARD** 

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank