



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

[358056]

Machine Id

INTERNATIONAL M3T45L 302884

Component

Hydraulic System

Fluid

JOHN DEERE STANDER JDM 570C ISO 17/14 (--- GAL)

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP352473	---	---
Sample Date		Client Info		28 Mar 2023	---	---
Machine Age	hrs	Client Info		8	---	---
Oil Age	hrs	Client Info		8	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	2	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	1	---	---
Lead	ppm	ASTM D5185(m)	>10	0	---	---
Copper	ppm	ASTM D5185(m)	>75	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>20	11	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	2008	---	---
Particles >6µm		ASTM D7647	>1300	117	---	---
Particles >14µm		ASTM D7647	>160	10	---	---
Particles >21µm		ASTM D7647	>40	4	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/14/10	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)		85	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		3	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		29	---	---
Calcium	ppm	ASTM D5185(m)		3169	---	---
Phosphorus	ppm	ASTM D5185(m)		1086	---	---
Zinc	ppm	ASTM D5185(m)		1288	---	---
Sulfur	ppm	ASTM D5185(m)		6590	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		52.8	---	---

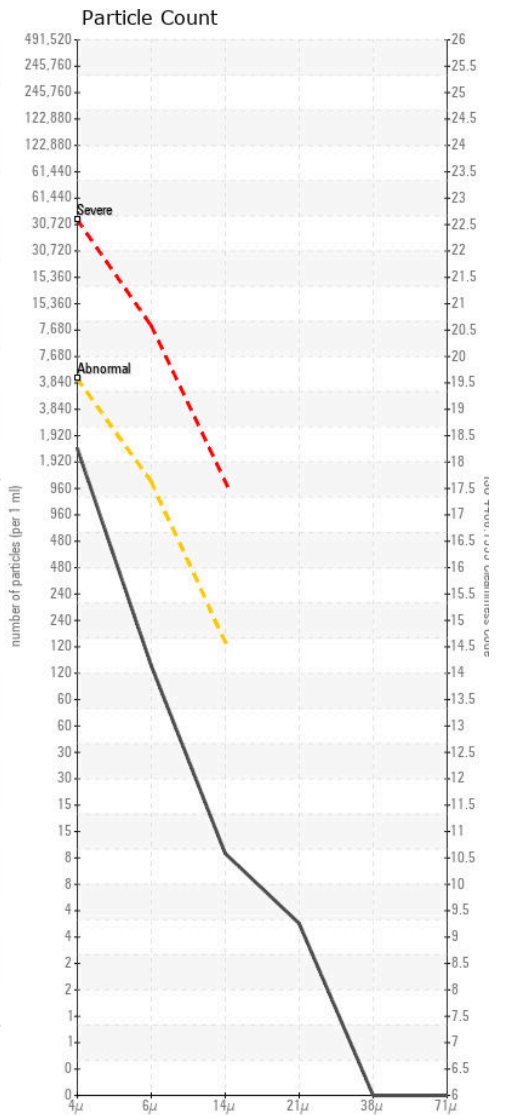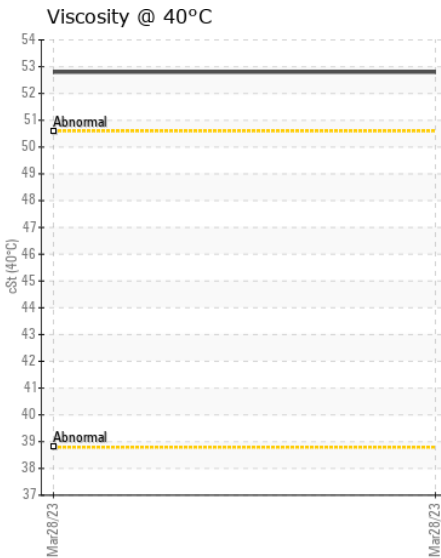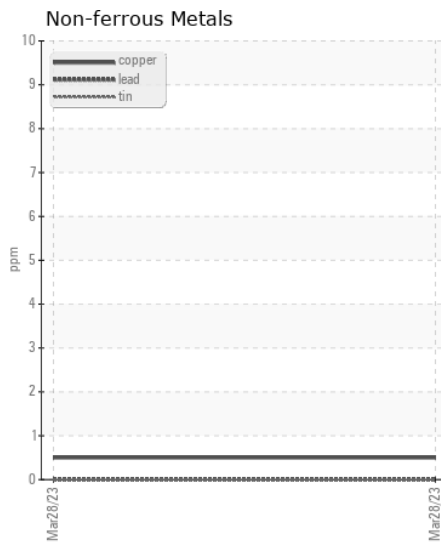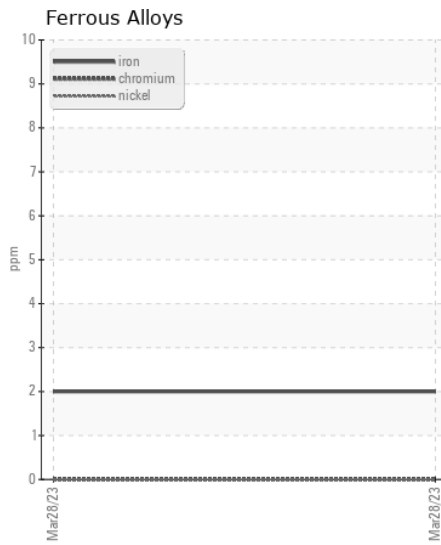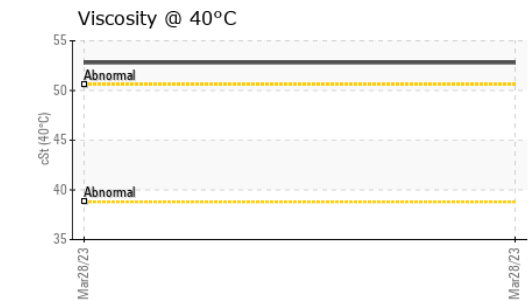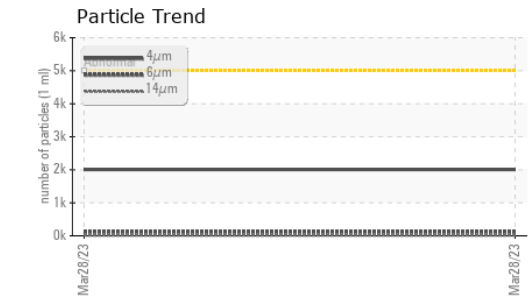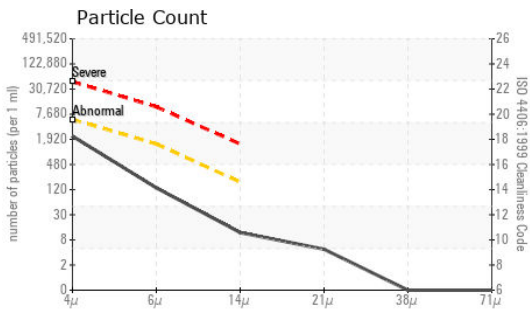

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP352473 **Received** : 31 Mar 2023  
**Lab Number** : 02548968 **Diagnosed** : 03 Apr 2023  
**Unique Number** : 5553978 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: PrtCount )

**STRONGCO EQUIPMENT INC.**  
 72 CHEMIN DU TREMBLAY  
 BOUCHERVILLE, QC  
 CA J4B 6Z6  
 Contact: Richard Bernard  
 rbernard@strongco.com  
 T: (450)449-4666  
 F: (450)449-7913

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.