



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR R945 055572-1866
Component
Splitter Box
Fluid
SAE 75W90 (3 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0226579	---	---
Sample Date		Client Info		06 Apr 2023	---	---
Machine Age	hrs	Client Info		562	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	13	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	0	---	---
Lead	ppm	ASTM D5185(m)	>30	<1	---	---
Copper	ppm	ASTM D5185(m)	>20	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	1	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 90 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	2	---	---
Boron	ppm	ASTM D5185(m)	150	<1	---	---
Barium	ppm	ASTM D5185(m)	5	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	0	2	---	---
Calcium	ppm	ASTM D5185(m)	20	9	---	---
Phosphorus	ppm	ASTM D5185(m)	1200	1560	---	---
Zinc	ppm	ASTM D5185(m)	25	12	---	---
Sulfur	ppm	ASTM D5185(m)	22000	27747	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.5	192	---	---

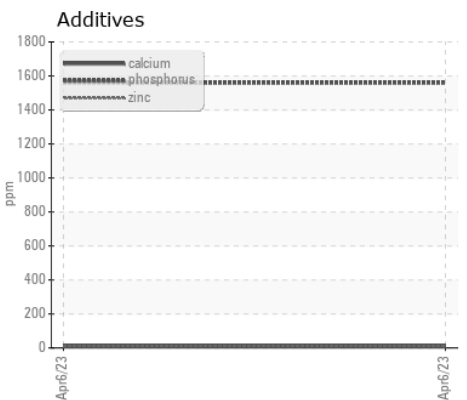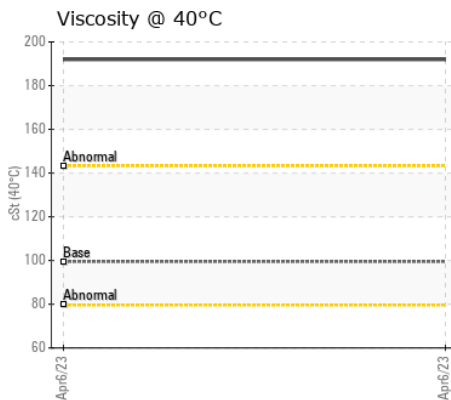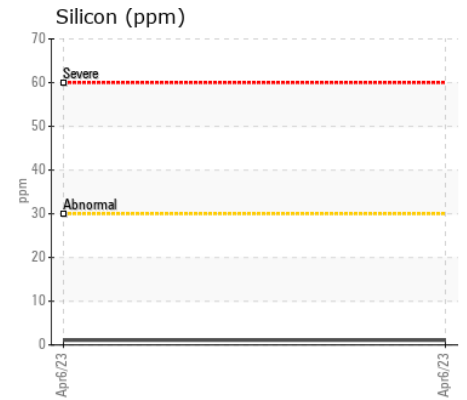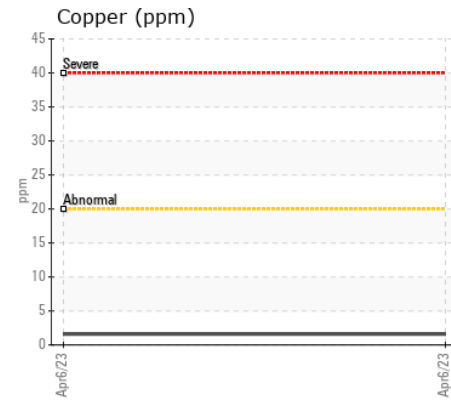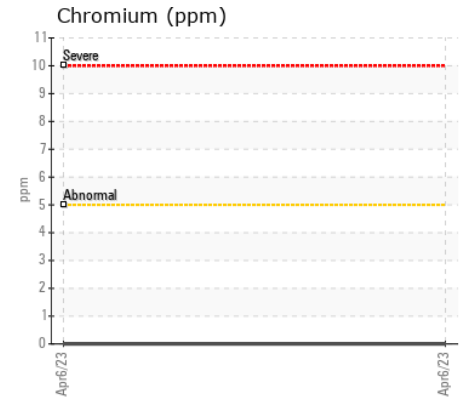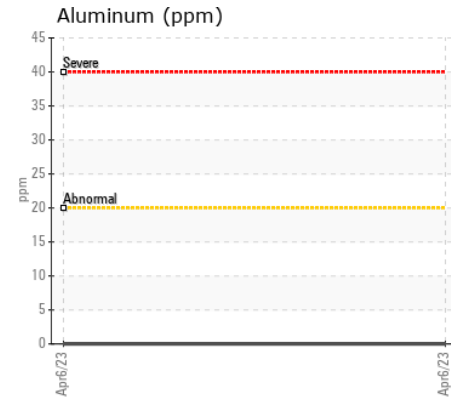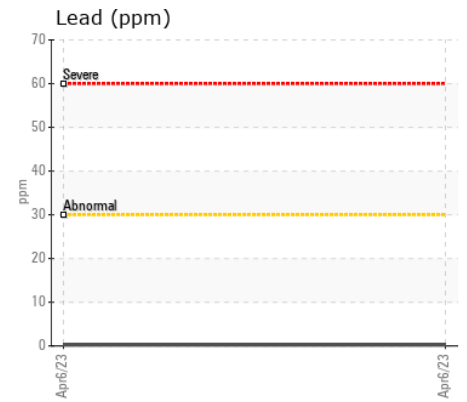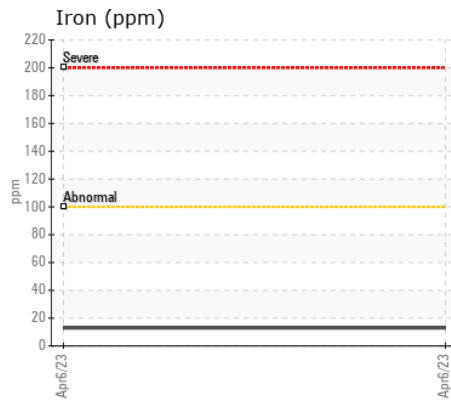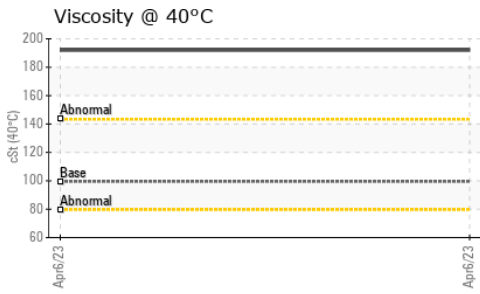

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0226579 **Received** : 27 Apr 2023
Lab Number : 02553925 **Tested** : 27 Apr 2023
Unique Number : 5566940 **Diagnosed** : 27 Apr 2023 - Wes Davis
Test Package : MOB 1

Amix Recycling
 11698 140 Street
 Surrey, BC
 CA V3R 2V4
 Contact: Kenji Wong
 kwong@amixgroup.ca
 T:
 F: (250)802-1002

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.