



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MAIN CRANE
 Component
Main Slewing Gearbox
 Fluid
PETRO CANADA ENDURATEX EP 150 (4 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0757638	---	---
Sample Date		Client Info		03 Jul 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>50	100	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		<1	---	---
Lead	ppm	ASTM D5185(m)	>15	<1	---	---
Copper	ppm	ASTM D5185(m)	>10	3	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	55	<1	---	---
Barium	ppm	ASTM D5185(m)	0	2	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	2	---	---
Magnesium	ppm	ASTM D5185(m)	2	1	---	---
Calcium	ppm	ASTM D5185(m)	6	12	---	---
Phosphorus	ppm	ASTM D5185(m)	250	218	---	---
Zinc	ppm	ASTM D5185(m)	3	12	---	---
Sulfur	ppm	ASTM D5185(m)	7500	27870	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	150.0	153	---	---

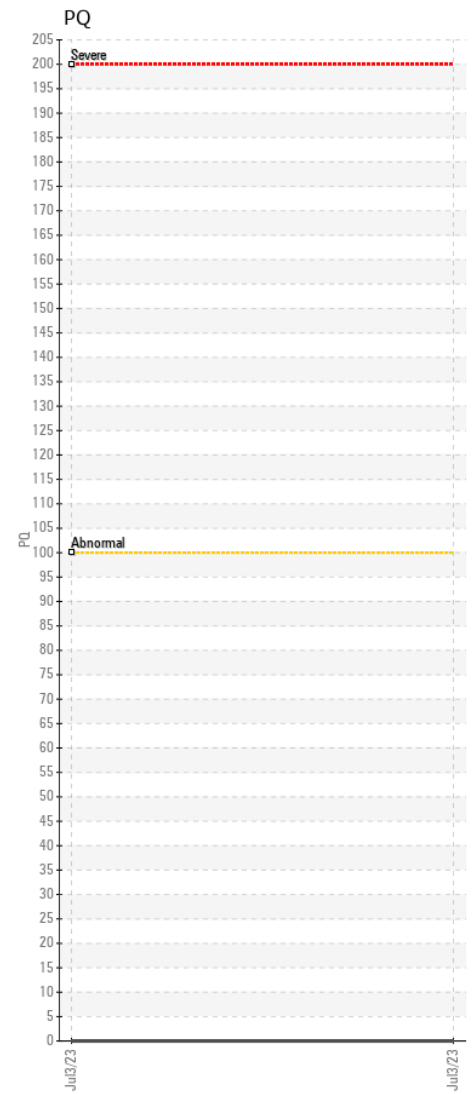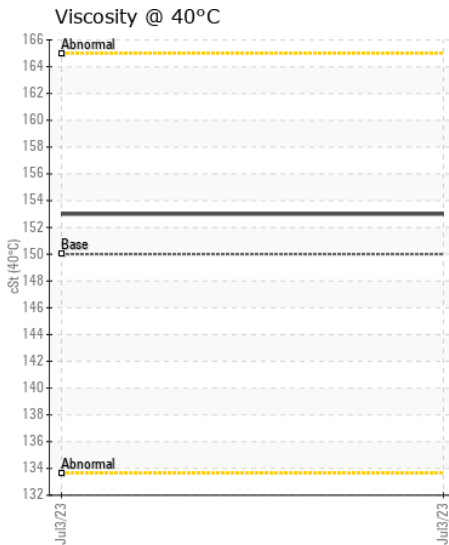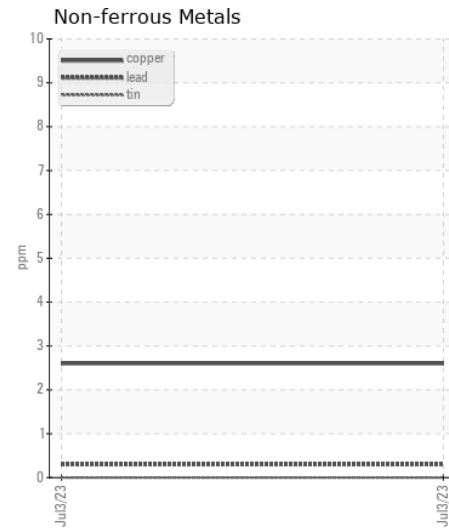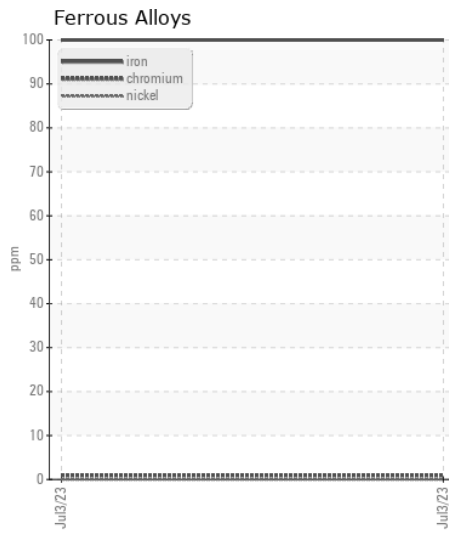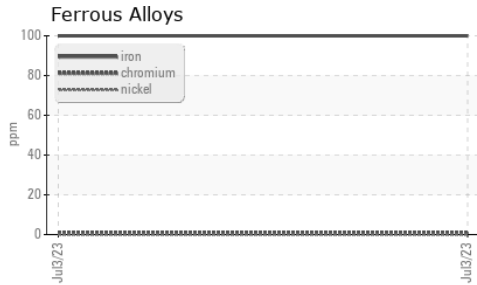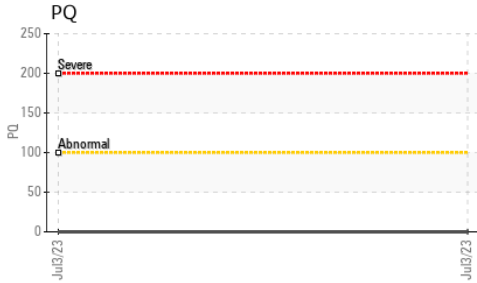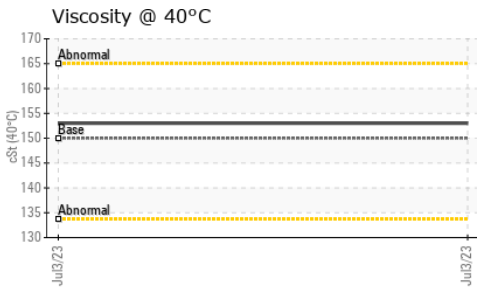

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0757638
Lab Number : 02570236
Unique Number : 5607282
Test Package : MAR 1 (Additional Tests: PQ)

Canadian Coast Guard - John Cabot
 280 Southside Road
 St. John's, NL
 CA A1E 0A3
 Contact: Chief Engineer
 johncabotce@ccgs-ngcc.gc.ca
 T: (709)730-4628
 F:

Received : 14 Jul 2023
 Tested : 14 Jul 2023
 Diagnosed : 19 Jul 2023 - Kevin Marson
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.