WEAR CONTAMINATION FLUID CONDITION

NORMAL NORMAL NORMAL

Machine Id


170832 WEST DB MB

Component

Unknown Component

{not provided} (--- GAL)

Test	History2
Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please floward information as to equipment type, reservoir capacity, tubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please provide information or your next ample. NOTE: Please provide information or your next ample. NOTE: Please provide information or your next sample. NOTE: Please provide information or your next sample. NOTE: Please provide information or your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sa	
Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please provide information regarding reservoir capacity, filter type and micron rating with next sample. NOTE: Please provide information on your feat sample. NoTE: Please provide information on your feat sample. NoTE: Please provide information on your sext sample. NoTE: Please provide information on your feat sample. NoTE: Please provide	
Machine Age hrs Client Info 0	
Contamination Contaminatio	
More complete information on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micror rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the sample sample. Please spe	
Information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. PQ	
Sample Please specify the brand, type, and viscosity of the oil on your next sample. Sample Status	
NORMAL N	
Iron	
Iron	
All component wear rates are normal. Chromium ppm ASTM D5185(m) 0 Nickel ppm ASTM D5185(m) 0 Titanium ppm ASTM D5185(m) 0 Silver ppm ASTM D5185(m) < 1 Aluminum ppm ASTM D5185(m) < 1 Aluminum ppm ASTM D5185(m) < 1 Aluminum ppm ASTM D5185(m) < 1 Lead ppm ASTM D5185(m) < 1 Copper ppm ASTM D5185(m) 7 Tin ppm ASTM D5185(m) 0 Tin ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0 White Metal scalar Visual* NONE NONE NONE Yellow Metal scalar Visual* NONE NONE NONE Yellow Metal scalar Visual* NONE NONE NONE Potassium ppm ASTM D5185(m) >20 <1 Water WC Method NEG Particles >6µm ASTM D7647 >5000 723 Particles >14µm ASTM D7647 >160 32 Particles >21µm ASTM D7647 >40 5 Particles >31µm ASTM D7647 >40 5 Particles >71µm ASTM D7647 >40 5	
Nilokel ppm ASTM D5185(m) 0	
Titanium ppm ASTM D5185(m) <1	
Silver	
Aluminum ppm ASTM D5185(m) <1	
Lead ppm ASTM D5185(m) 7	
Copper ppm ASTM D5185(m) 0 Tin ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0 White Metal scalar Visual* NONE NONE NONE Yellow Metal scalar Visual* NONE NONE NONE NONE The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. Silicon ppm ASTM D5185(m) >20 <1 Water WC Method NEG Particles >4μm ASTM D7647 >5000 2540 Particles >6μm ASTM D7647 >1300 723 Particles >21μm ASTM D7647 >40 5 Particles >21μm ASTM D7647 >40 5 Particles >38μm ASTM D7647 >40 5 Particles >71μm ASTM D7647 >3 0 Particles >71μm ASTM D7647 >3 0 Oil Cleanliness ISO 4406 (c) 51917/14 19/17/12 Silt scalar Visual* NONE NONE	
Tin	
Tin	
White Metal Scalar Visual* NONE NONE Yellow Metal Scalar Visual* NONE NONE NONE Yellow Metal Scalar Visual* NONE NON	
Yellow Metal scalar Visual* NONE NONE NONE CONTAMINATION	
Silicon ppm ASTM D5185(m) >20 <1	
Silicon ppm ASTM D5185(m) >20 <1	
Potassium ppm ASTM D5185(m) >20 <1 Water WC Method NEG Particles >4μm ASTM D7647 >5000 2540 Particles >6μm ASTM D7647 >1300 723 Particles >14μm ASTM D7647 >160 32 Particles >21μm ASTM D7647 >40 5 Particles >38μm ASTM D7647 >10 0 Particles >71μm ASTM D7647 >3 0 Particles >71μm ASTM D7647 >10 NONE NONE Particles >71μm ASTM D7647 >10 NONE NONE Particles >71μm ASTM D7647 >10 NONE NONE	
Potassium ppm ASTM D5185(m) >20 <1 Water WC Method NEG Particles >4μm ASTM D7647 >5000 2540 Particles >6μm ASTM D7647 >1300 723 Particles >14μm ASTM D7647 >160 32 Particles >21μm ASTM D7647 >40 5 Particles >38μm ASTM D7647 >10 0 Particles >71μm ASTM D7647 >3 0 Particles >71μm ASTM D7647 >10 NONE NONE Particles >71μm ASTM D7647 >10 NONE NONE Particles >71μm ASTM D7647 >10 NONE NONE	
cleanliness code. The system and fluid cleanliness is acceptable. Particles >4μm ASTM D7647 >5000 2540 Particles >6μm ASTM D7647 >1300 723 Particles >14μm ASTM D7647 >160 32 Particles >21μm ASTM D7647 >40 5 Particles >38μm ASTM D7647 >10 0 Particles >71μm ASTM D7647 >3 0 Oil Cleanliness ISO 4406 (c) >19/17/14 19/17/12 Silt scalar Visual* NONE NONE	
Particles >4µm	
Particles >6μm ASTM D7647 >1300 723 Particles >14μm ASTM D7647 >160 32 Particles >21μm ASTM D7647 >40 5 Particles >38μm ASTM D7647 >10 0 Particles >71μm ASTM D7647 >3 0 Oil Cleanliness ISO 4406 (c) >19/17/14 19/17/12 Silt scalar Visual* NONE NONE	
Particles >21μm ASTM D7647 >40 5 Particles >38μm ASTM D7647 >10 0 Particles >71μm ASTM D7647 >3 0 Oil Cleanliness ISO 4406 (c) >19/17/14 19/17/12 Silt scalar Visual* NONE NONE	
Particles >38μm ASTM D7647 >10 0 Particles >71μm ASTM D7647 >3 0 Oil Cleanliness ISO 4406 (c) >19/17/14 19/17/12 Silt scalar Visual* NONE NONE	
Particles >71μm ASTM D7647 >3 0 Oil Cleanliness ISO 4406 (c) >19/17/14 19/17/12 Silt scalar Visual* NONE NONE	
Oil Cleanliness ISO 4406 (c) >19/17/14 19/17/12 Silt scalar Visual* NONE NONE	
Silt scalar Visual* NONE NONE	
Silt scalar Visual* NONE NONE	
Debris scalar Visual* NONE NONE	
Sand/Dirt scalar Visual* NONE NONE	
Appearance scalar Visual* NORML	
Odor scalar Visual* NORML	
Emulsified Water scalar Visual* NEG	
FLUID CONDITION Sodium ppm ASTM D5185(m) <1	
Boron ppm ASTM D5185(m) <1	
Viscosity of sample indicates oil is within ISO 32 range, advise Barium ppm ASTM D5185(m) O	
investigate. The AN level is acceptable for this fluid. The condition of the sample is suitable for further service. Molybdenum ppm ASTM D5185(m) O	
the sample is suitable for further service. Manganese ppm ASTM D5185(m) 0	
Magnesium ppm ASTM D5185(m) 5	
Calcium ppm ASTM D5185(m) 66	
Phosphorus ppm ASTM D5185(m) 248	
Zinc ppm ASTM D5185(m) 285	
Sulfur ppm ASTM D5185(m) 2336	
Acid Number (AN) mg KOH/g ASTM D974* 0.34	
Visc @ 40°C cSt ASTM D7279(m) 34.5	

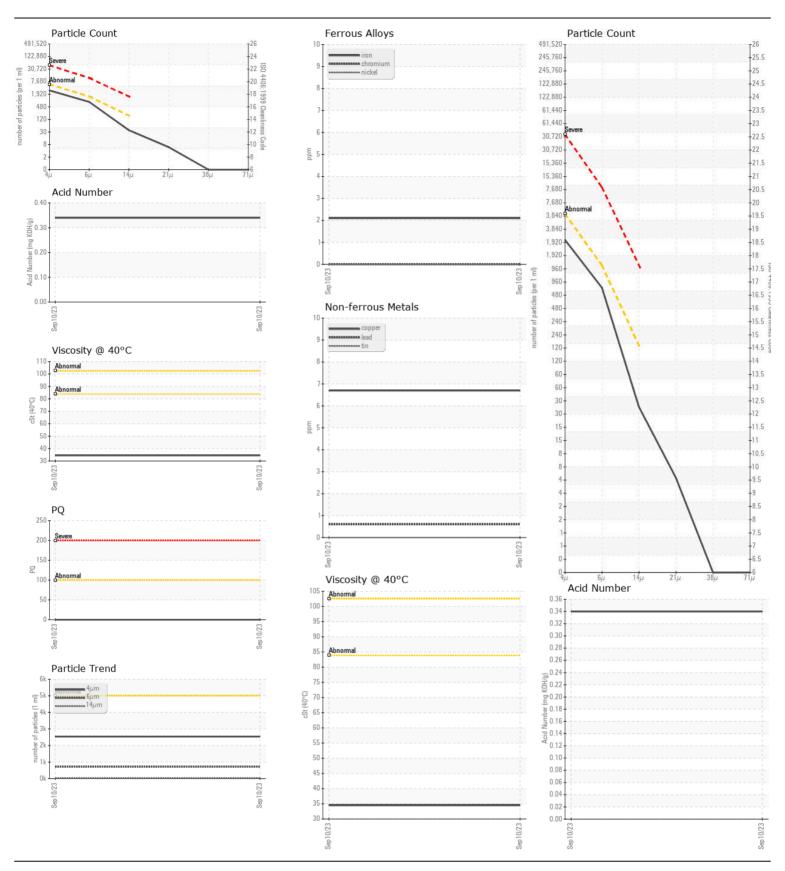



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: PP : 02581379 Unique Number : 5642444

Received **Tested** Diagnosed

: 11 Sep 2023 : 13 Sep 2023

: 13 Sep 2023 - Kevin Marson Test Package: IND 2 (Additional Tests: PRTCOUNT, TAN Man)

HIBERNIA MGMT & DEVELOPMENT CO. LTD SUITE 1000,, 100 NEW GOWER STREET ST.JOHNS, NL

CA A1C 6K3 Contact: Sam Nash

samantha.m.nash@exxonmobil.com T:

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: (709)722-3766