

WEAR NORMAL CONTAMINATION NORMAL FLUID CONDITION NORMAL

Machine Id **170831 EAST EA MA** Component **Hydraulic System** Fluid **AW HYDRAULIC OIL ISO 32 (--- GAL)**

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that his fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

All component wear rates are normal.


CONTAMINATION


The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				· · · · · · · · · · · · · · · · · · ·		
Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP		
Sample Date		Client Info		10 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Filter Age	hrs	Client Info		0		
Oil Changed	_	Client Info		N/A		
Filter Changed		Client Info		N/A		
Sample Status		0.10111 1.110		NORMAL		
Iron	ppm	ASTM D5185(m)	>20	4		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	7		
Tin	ppm	ASTM D5185(m)	>10	0		
Vanadium	ppm	ASTM D5185(m)		0		
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Silicon	ppm	ASTM D5185(m)	>15	2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water		WC Method	>0.05	NEG		
Particles >4µm		ASTM D7647	>5000	214		
Particles >6µm		ASTM D7647	>1300	67		
Particles >14µm		ASTM D7647	>160	7		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
0						
Sodium	ppm	ASTM D5185(m)	-	<1		
Boron	ppm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(m)	5	0		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)	05	0		
Magnesium	ppm	ASTM D5185(m)	25	6		
Calcium	ppm	ASTM D5185(m)	200	43		
Phosphorus	ppm	ASTM D5185(m)	300	242		
Zinc	ppm	ASTM D5185(m)	370	261		
Sulfur	ppm	ASTM D5185(m)	2500	2695		
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.26		
Visc @ 40°C	cSt	ASTM D7279(m)	32	33.6		

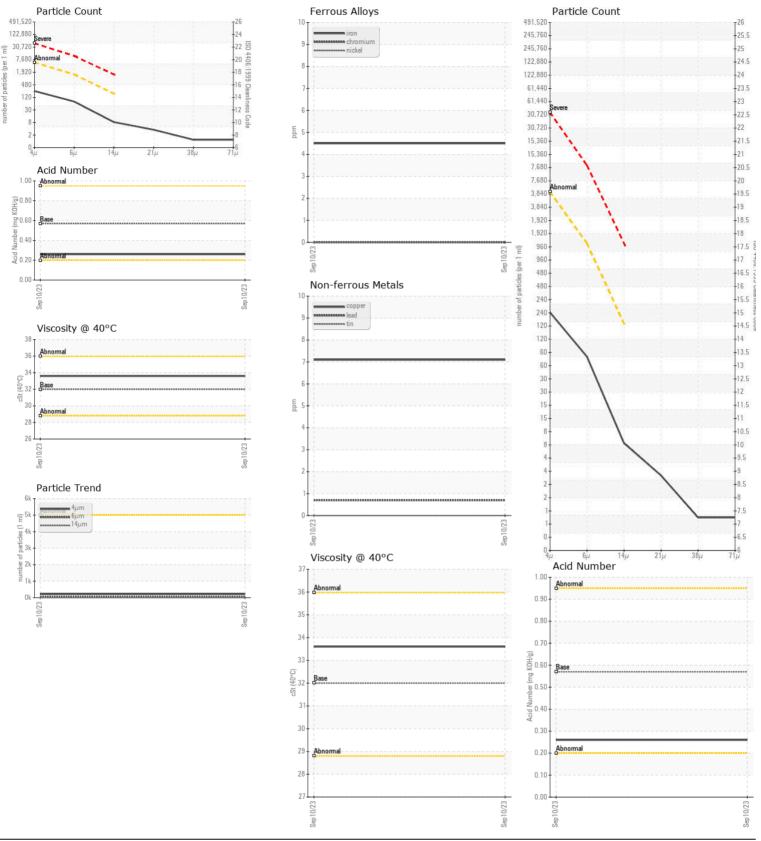

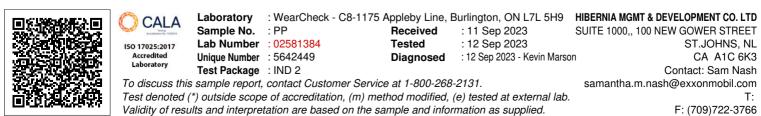

Contact/Location: Sam Nash - HIBSTJ Page 2 of 2