



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id
Forward Visor Hydraulics
 Component
Forward Hydraulic System
 Fluid
TOTAL EQUIVIS ZS 32 (450 LTR)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.










CONTAMINATION

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0861291	WC0738846	---
Sample Date		Client Info		29 Sep 2023	20 Sep 2022	---
Machine Age	mths	Client Info		0	0	---
Oil Age	mths	Client Info		3	0	---
Filter Age	mths	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ATTENTION	ATTENTION	---
Iron	ppm	ASTM D5185(m)	>20	2	3	---
Chromium	ppm	ASTM D5185(m)	>10	2	3	---
Nickel	ppm	ASTM D5185(m)	>10	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		<1	0	---
Aluminum	ppm	ASTM D5185(m)	>10	0	<1	---
Lead	ppm	ASTM D5185(m)	>20	0	0	---
Copper	ppm	ASTM D5185(m)	>20	<1	<1	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>15	<1	<1	---
Potassium	ppm	ASTM D5185(m)	>20	0	<1	---
Water		WC Method	>0.05	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	5759	5682	---
Particles >6µm		ASTM D7647	>1300	433	317	---
Particles >14µm		ASTM D7647	>160	12	14	---
Particles >21µm		ASTM D7647	>40	2	5	---
Particles >38µm		ASTM D7647	>10	1	1	---
Particles >71µm		ASTM D7647	>3	1	1	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/16/11	20/15/11	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		<1	<1	---
Boron	ppm	ASTM D5185(m)		1	<1	---
Barium	ppm	ASTM D5185(m)		<1	0	---
Molybdenum	ppm	ASTM D5185(m)		<1	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)		4	<1	---
Calcium	ppm	ASTM D5185(m)		56	43	---
Phosphorus	ppm	ASTM D5185(m)		315	355	---
Zinc	ppm	ASTM D5185(m)		408	398	---
Sulfur	ppm	ASTM D5185(m)		1589	2850	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.46	0.52	---
Visc @ 40°C	cSt	ASTM D7279(m)		30.5	30.6	---

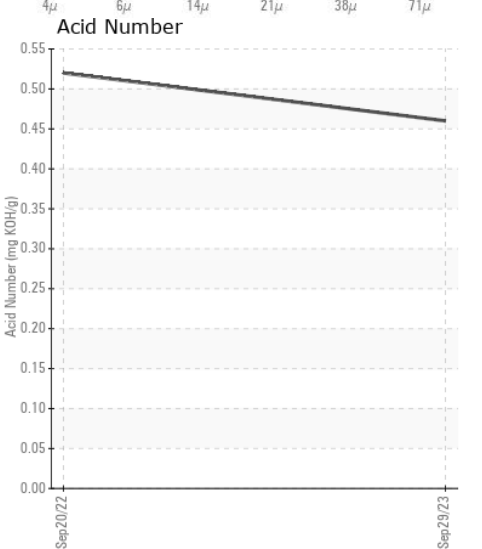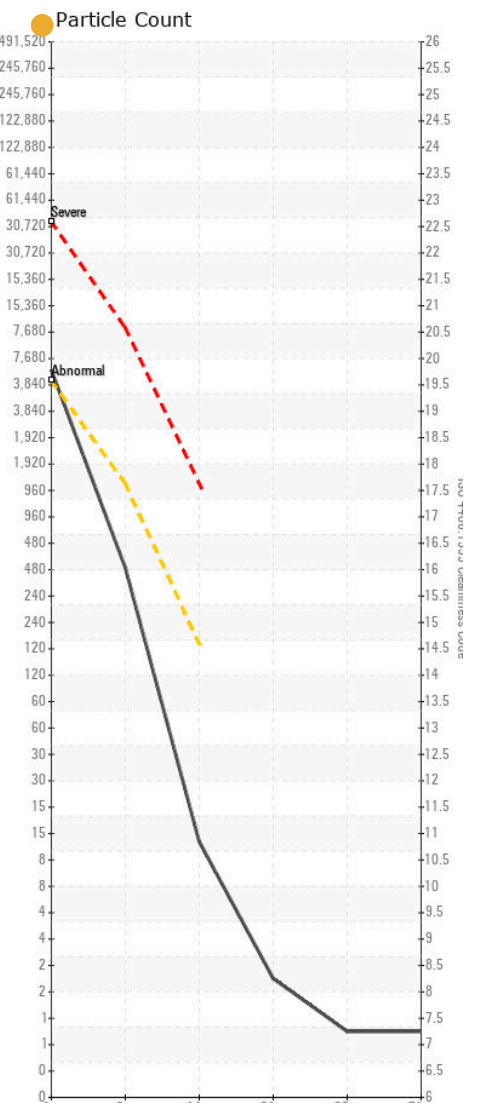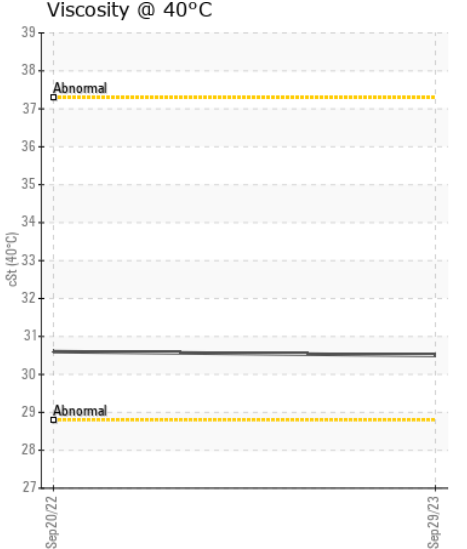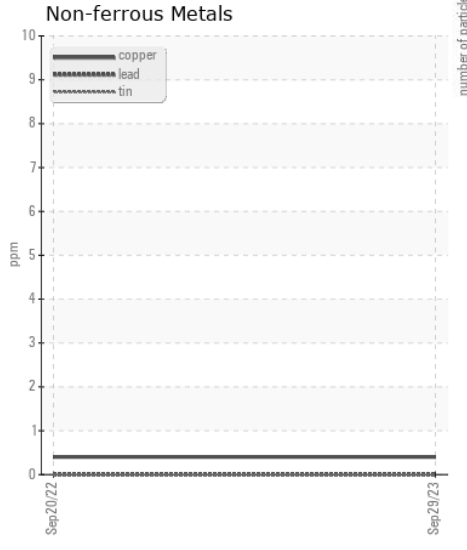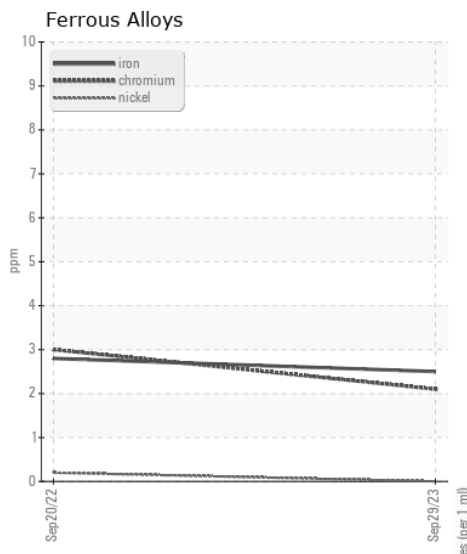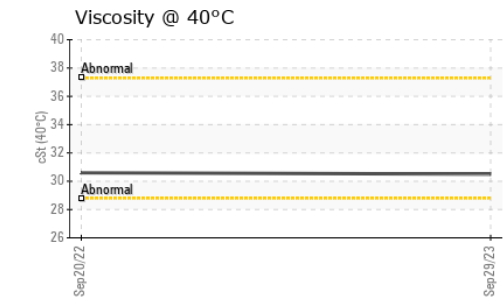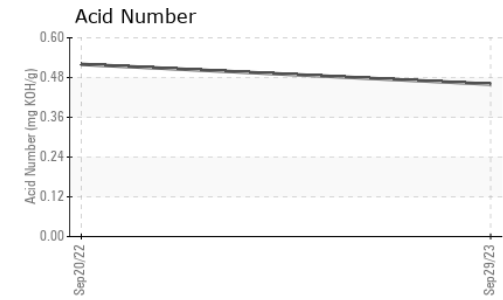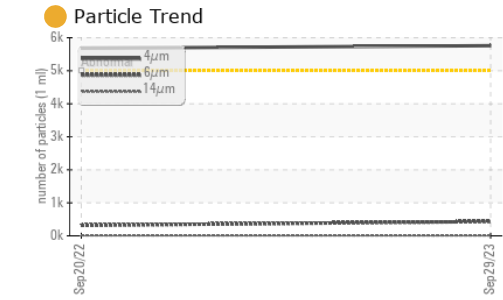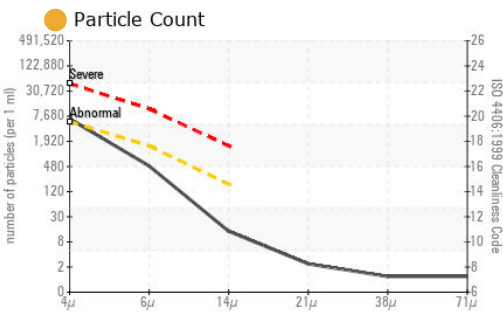

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0861291
Lab Number : 02586783
Unique Number : 5655849
Test Package : MAR 2
Received : 04 Oct 2023
Tested : 05 Oct 2023
Diagnosed : 05 Oct 2023 - Kevin Marson

CANSHIP UGLAND - SVANOY
 1315 TOPSAIL ROAD, PO BOX 8040 STN A
 ST JOHNS, NL
 CA AIB 3M7
 Contact: Guillaume Bernier
 gbernier@canship.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.