



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ALASKA CRANE
 Component
Hydraulic System
 Fluid
MOBIL UNIVIS N-C 22 (800 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid. this testkit includes AN to determine the suitability of the oil for continued use.

WEAR

All component wear rates are normal.






CONTAMINATION

The water content is negligible. There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service (unconfirmed).

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0646812	WC0847733	WC0703944
Sample Date		Client Info		09 Oct 2023	10 Aug 2023	20 Oct 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
Iron	ppm	ASTM D5185(m)	>20	6	6	5
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		1	<1	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>10	<1	8	<1
Copper	ppm	ASTM D5185(m)	>75	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	<1	<1	1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Water	%	ASTM D6304*	>0.1	0.071	---	---
ppm Water	ppm	ASTM D6304*	>1000	714.6	---	---
Silt	scalar	Visual*	NONE	VLITE	LIGHT	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	HAZY	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	.2%	NEG	NEG
Sodium	ppm	ASTM D5185(m)		28	25	21
Boron	ppm	ASTM D5185(m)		2	<1	1
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		4	4	3
Calcium	ppm	ASTM D5185(m)		35	35	39
Phosphorus	ppm	ASTM D5185(m)		334	358	364
Zinc	ppm	ASTM D5185(m)		405	413	401
Sulfur	ppm	ASTM D5185(m)		2739	2535	2522
Visc @ 40°C	cSt	ASTM D7279(m)	22	23.6	23.3	23.2

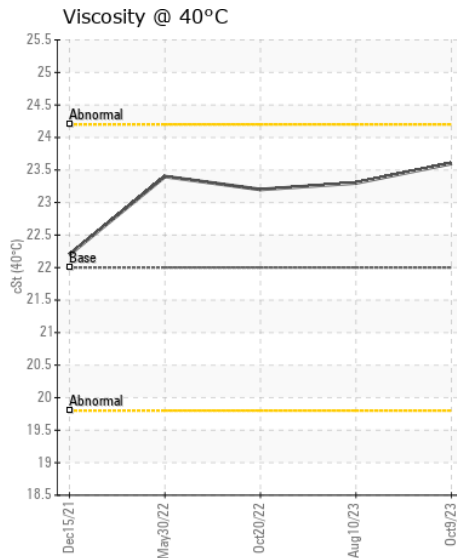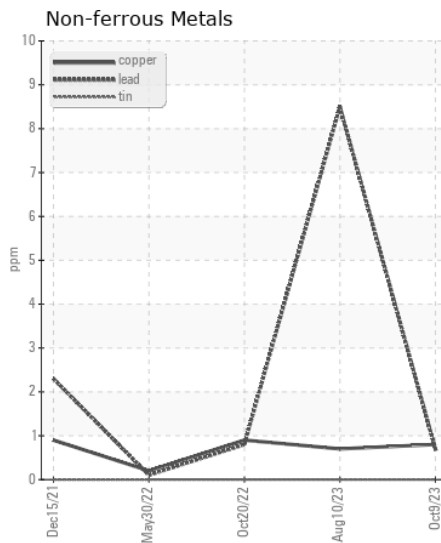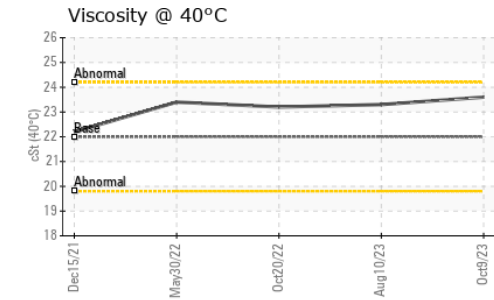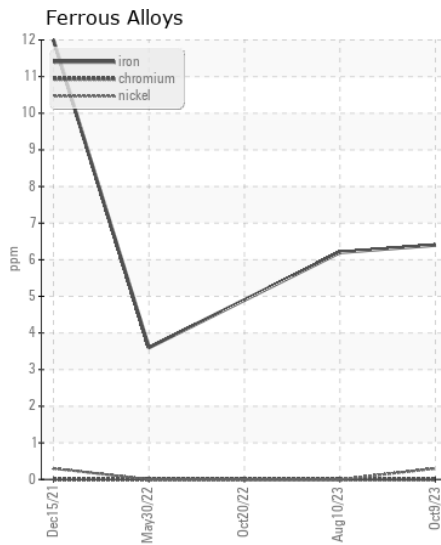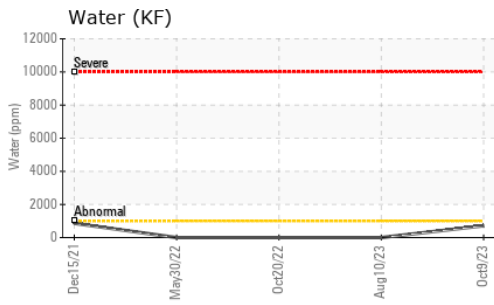

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **Horizon Maritime Services Ltd. - Polar Prince**
Sample No. : WC0646812 **Received** : 17 Oct 2023 422 Main Street
Lab Number : 02589788 **Tested** : 18 Oct 2023 Mulgrave, NS
Unique Number : 5658854 **Diagnosed** : 18 Oct 2023 - Kevin Marson CA B0E 2G0
Test Package : MAR 1 (Additional Tests: KF) **Contact:** Chief Engineer

To discuss this sample report, contact Customer Service at 1-800-268-2131. chiefeng.polarprince@miaawpukehorizon.com
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T:
 Validity of results and interpretation are based on the sample and information as supplied. F: