



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[19414]

Machine Id

VOLVO DPI-A 3100003705

Component

Starboard Gear Unit

Fluid

{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA050706	---	---
Sample Date		Client Info		26 Dec 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184*		5	---	---
Iron	ppm	ASTM D5185(m)	>500	209	---	---
Chromium	ppm	ASTM D5185(m)	>8	1	---	---
Nickel	ppm	ASTM D5185(m)	>5	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>15	0	---	---
Copper	ppm	ASTM D5185(m)	>100	<1	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		10	---	---
Boron	ppm	ASTM D5185(m)		171	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		18	---	---
Calcium	ppm	ASTM D5185(m)		8	---	---
Phosphorus	ppm	ASTM D5185(m)		1352	---	---
Zinc	ppm	ASTM D5185(m)		27	---	---
Sulfur	ppm	ASTM D5185(m)		21789	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		102	---	---

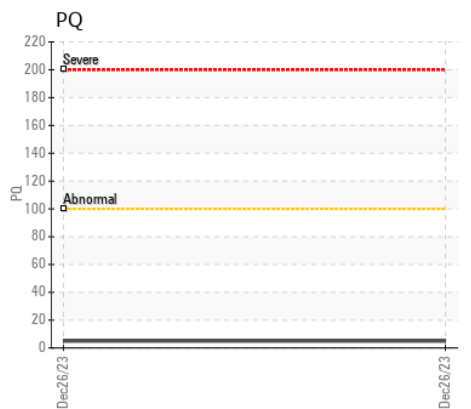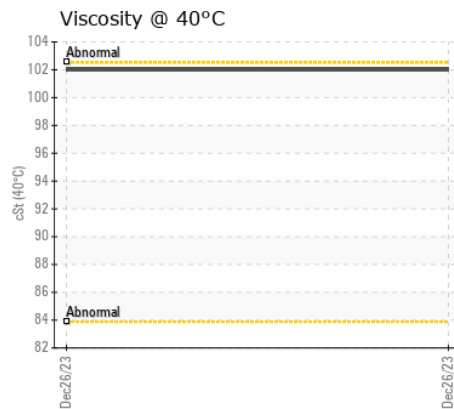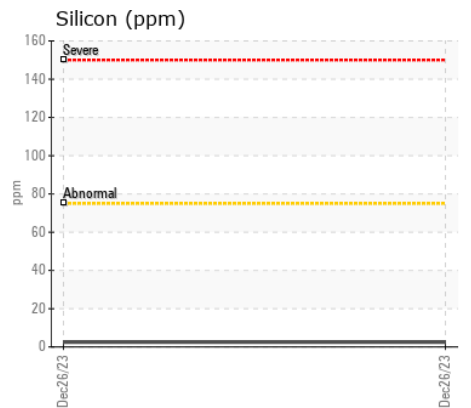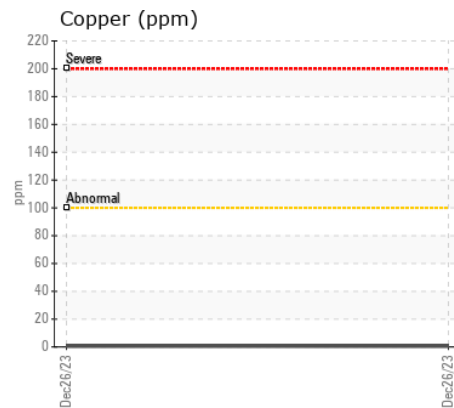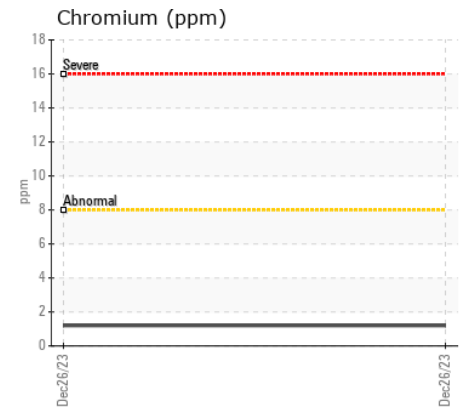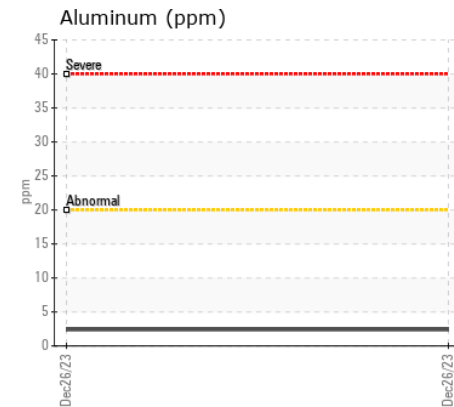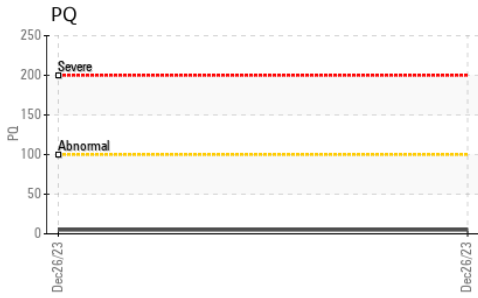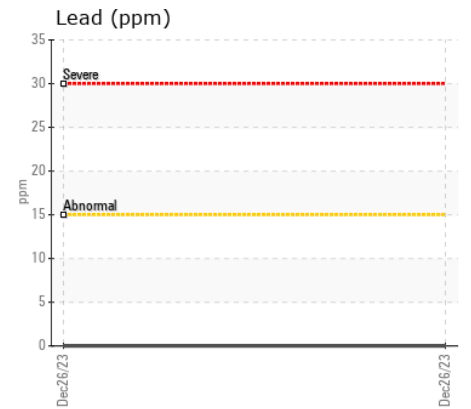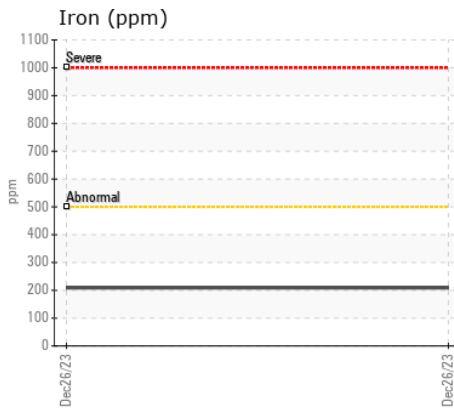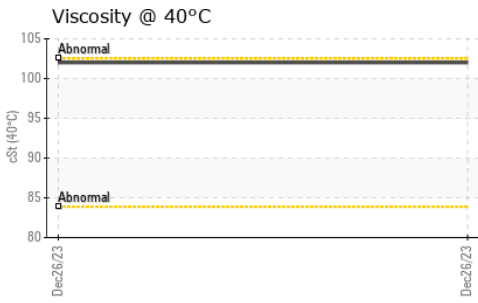

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VPA050706 **Received** : 27 Dec 2023
Lab Number : 02605461 **Tested** : 28 Dec 2023
Unique Number : 5698546 **Diagnosed** : 28 Dec 2023 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PQ)

Sea Power Ltd
 2077 Amelia Ave
 SIDNEY, BC
 CA V8L 3Z8
 Contact: Kayla Sousa
 service@seapower.ca
 T: (250)656-4341
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.