



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**20074576**  
 Component  
**Starboard Transmission**  
 Fluid  
**SAE 30W (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CU0021018</b>	---	---
Sample Date		Client Info		<b>03 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1000</b>	---	---
Oil Age	hrs	Client Info		<b>600</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>200	<b>106</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m)		<b>2</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>12</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>22</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>352</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

## CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>50	<b>9</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>10</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>9</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>57</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>2</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>1236</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>339</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>1157</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1257</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>7550</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	95.0	<b>92.9</b>	---	---

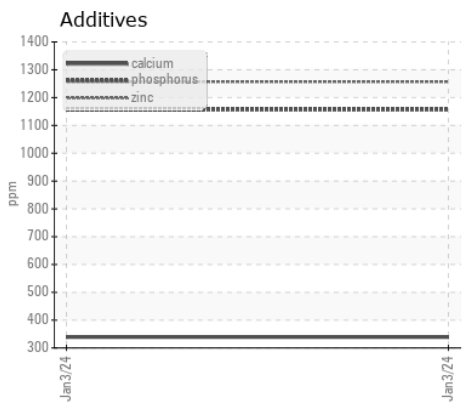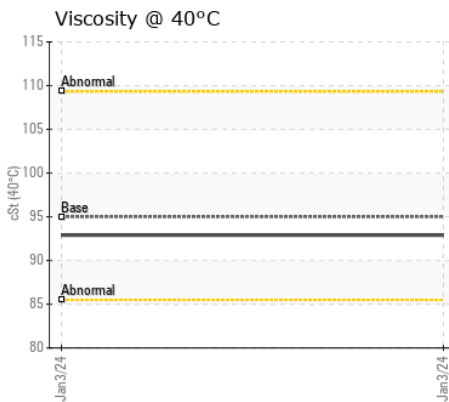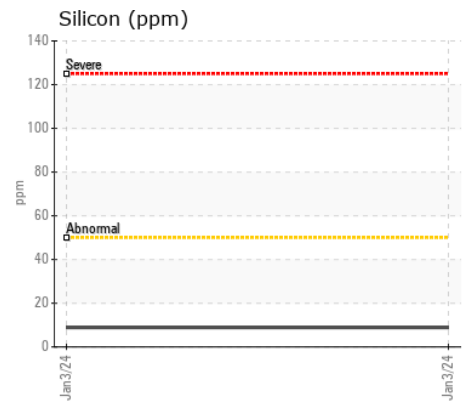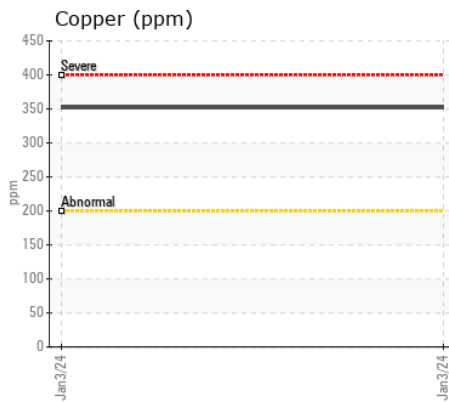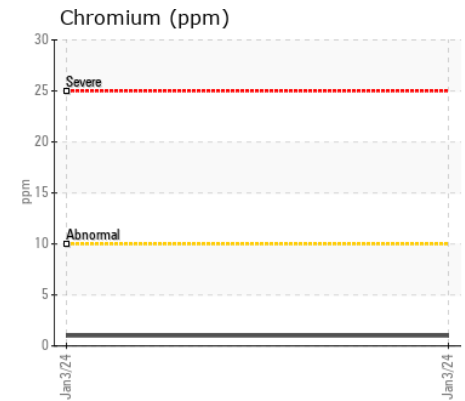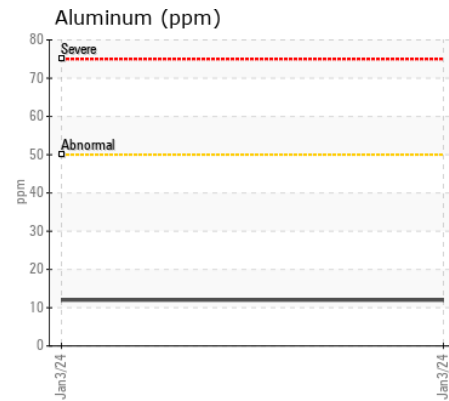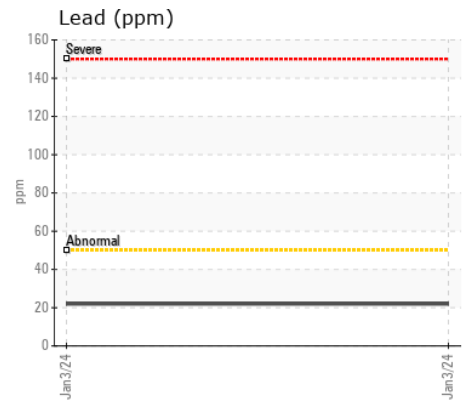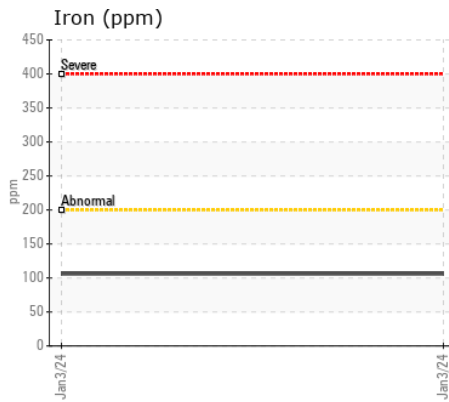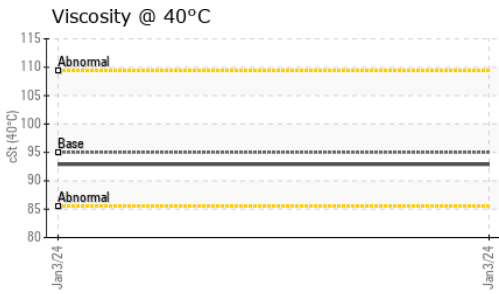

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CU0021018 **Received** : 05 Jan 2024  
**Lab Number** : 02606816 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 5707902 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

**TOM WARDLE**  
 2997 OLD HWY 7  
 ROCKLAND, ON  
 CA K4K 1W1  
 Contact: Tom Wardle  
 tomw@zec.ca  
 T: (613)229-6758  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.