



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
20074577
Component
Port Transmission
Fluid
SAE 30W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0021019	---	---
Sample Date		Client Info		03 Jan 2024	---	---
Machine Age	hrs	Client Info		1000	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	70	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)		<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Aluminum	ppm	ASTM D5185(m)	>50	12	---	---
Lead	ppm	ASTM D5185(m)	>50	20	---	---
Copper	ppm	ASTM D5185(m)	>200	340	---	---
Tin	ppm	ASTM D5185(m)	>10	5	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>50	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	10	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)		50	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		2	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		1109	---	---
Calcium	ppm	ASTM D5185(m)		481	---	---
Phosphorus	ppm	ASTM D5185(m)		1127	---	---
Zinc	ppm	ASTM D5185(m)		1209	---	---
Sulfur	ppm	ASTM D5185(m)		7057	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	95.0	91.4	---	---

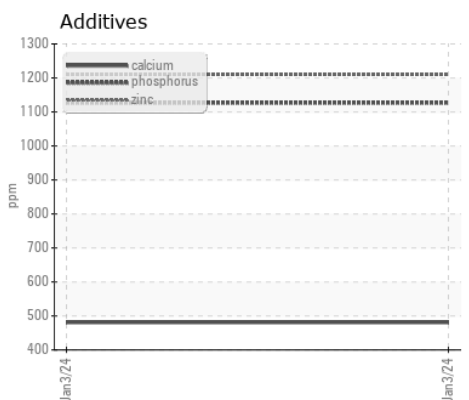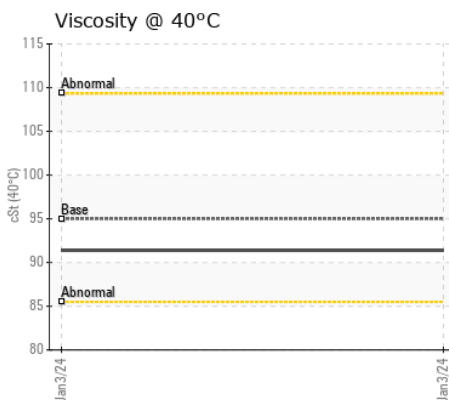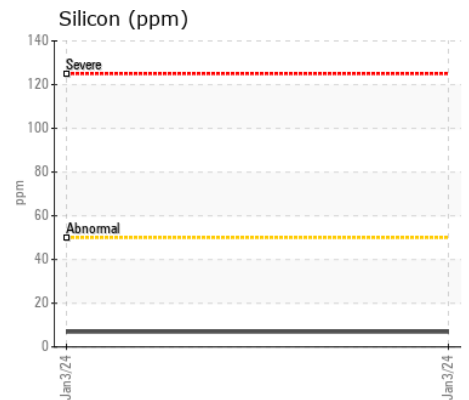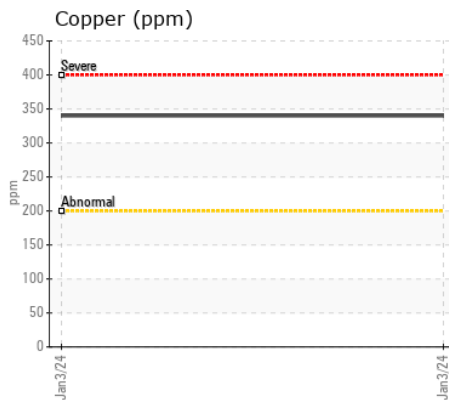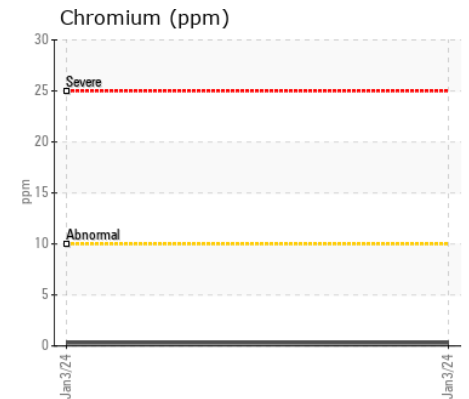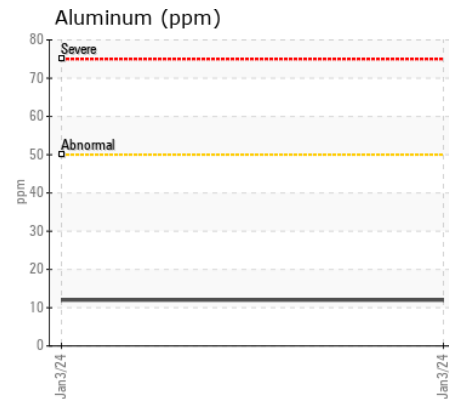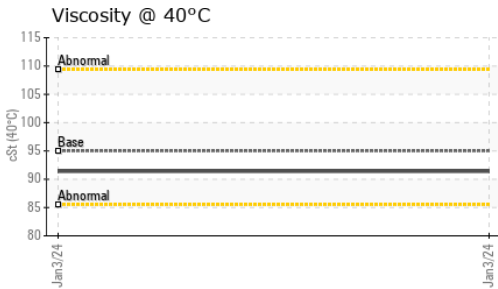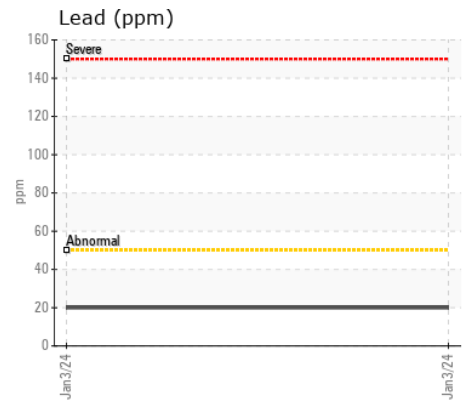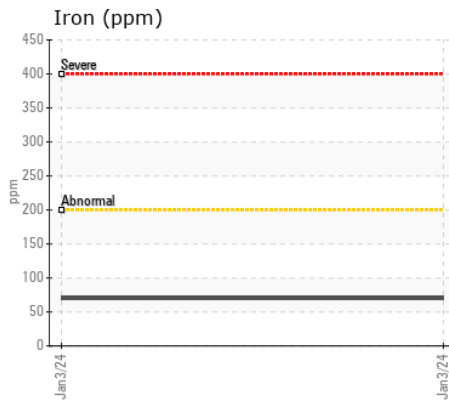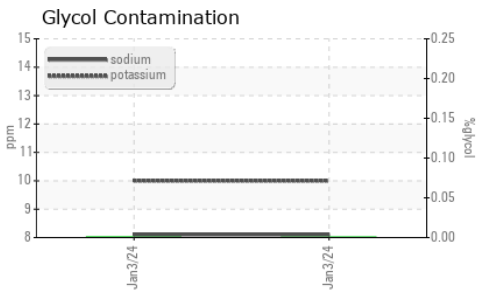

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0021019 **Received** : 05 Jan 2024
Lab Number : 02606817 **Diagnosed** : 08 Jan 2024
Unique Number : 5707903 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol)

TOM WARDLE
 2997 OLD HWY 7
 ROCKLAND, ON
 CA K4K 1W1
 Contact: Tom Wardle
 tomw@zec.ca
 T: (613)229-6758
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.