



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[390261]**  
 Machine Id  
**314479**  
 Component  
**Front Left Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP391518</b>	---	---
Sample Date		Client Info		<b>04 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>4713</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184*		<b>158</b>	---	---
Iron	ppm	ASTM D5185(m)	>500	<b>728</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>6</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>35</b>	---	---
Lead	ppm	ASTM D5185(m)	>25	<b>1</b>	---	---
Copper	ppm	ASTM D5185(m)	>50	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	<b>140</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>12</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	<b>6</b>	---	---
Boron	ppm	ASTM D5185(m)	400	<b>201</b>	---	---
Barium	ppm	ASTM D5185(m)	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	12	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>6</b>	---	---
Magnesium	ppm	ASTM D5185(m)	12	<b>26</b>	---	---
Calcium	ppm	ASTM D5185(m)	150	<b>85</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	<b>1306</b>	---	---
Zinc	ppm	ASTM D5185(m)	125	<b>6</b>	---	---
Sulfur	ppm	ASTM D5185(m)	22500	<b>23145</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	<b>113</b>	---	---

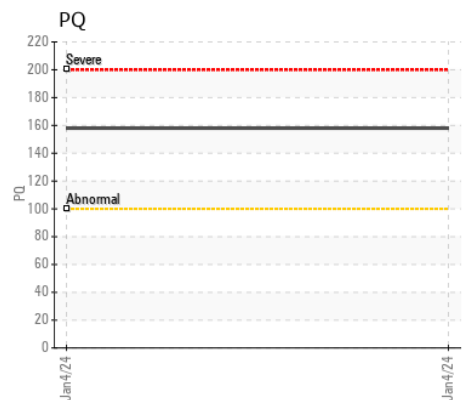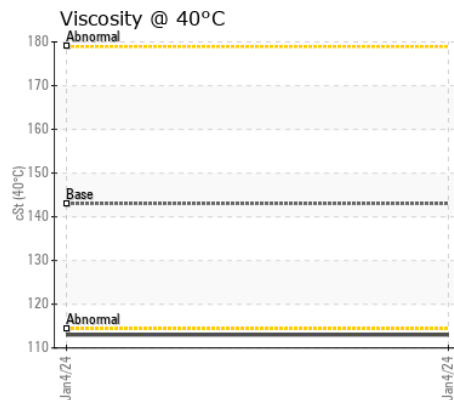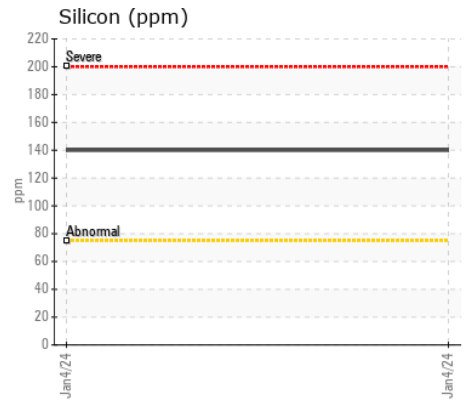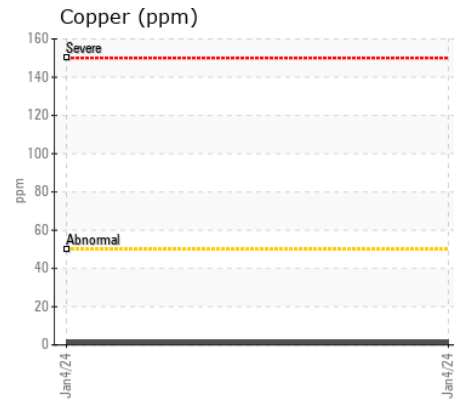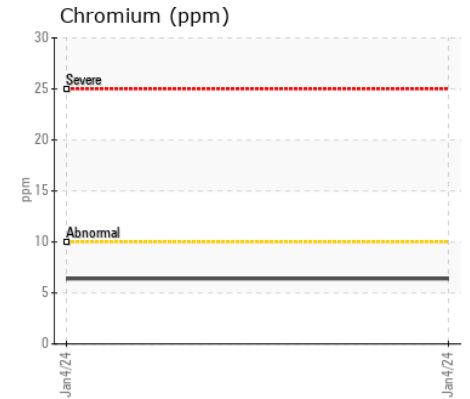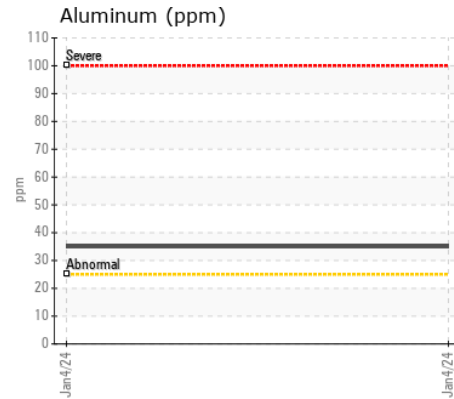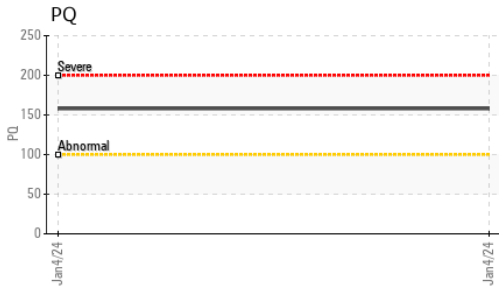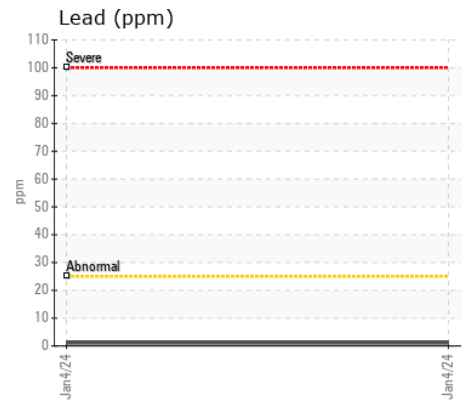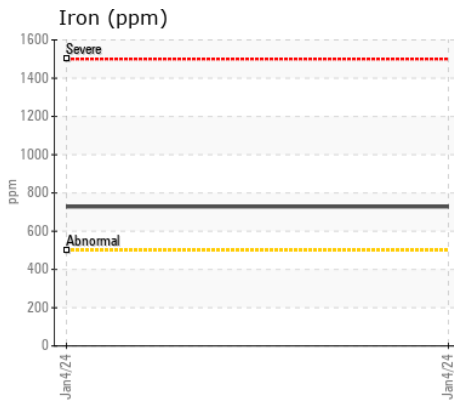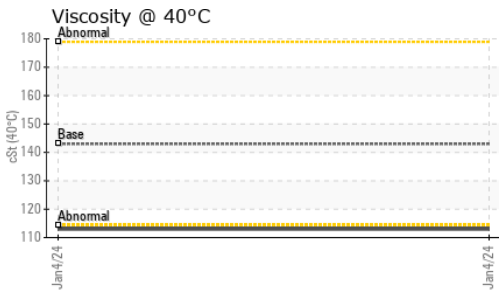

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP391518 **Received** : 05 Jan 2024  
**Lab Number** : 02606831 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 5707917 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**CRH CANADA GROUP INC.**  
 P.O. BOX 5400  
 CONCORD, ON  
 CA L4K 1B6  
 Contact: Dan Brown  
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: