



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINANTS	NORMAL
OIL CONDITION	NORMAL


Area
Engine room
 Machine Id
G5-2111 Main Engine #1 (S/N C481)
 Component
1 Main Engine
 Fluid
SHELL ROTELLA T 30 (810 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.



Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0855489	WC0855482	WC0772116
Sample Date		Client Info		04 Jan 2024	10 Dec 2023	07 May 2023
Machine Age	hrs	Client Info		75332	75240	74745
Oil Age	hrs	Client Info		5191	5099	4604
Filter Age	hrs	Client Info		5191	5099	4604
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	ATTENTION	NORMAL

PQ		ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m)	>75	5	5	3
Chromium	ppm	ASTM D5185(m)	>8	2	1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	0
Titanium	ppm	ASTM D5185(m)	>3	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	2	1	1
Lead	ppm	ASTM D5185(m)	>18	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>80	3	4	5
Tin	ppm	ASTM D5185(m)	>14	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Large Particles		DR-Ferr*		38.3	1.3	20.9
Small Particles		DR-Ferr*		16.5	0.9	5.6
Total Particles		DR-Ferr*	>---	54.8	2.2	26.5
Large Particles Percentage	%	DR-Ferr*		39.8	18.2	57.7
Severity Index		DR-Ferr*		835	1	320
Ferrous Rubbing	Scale 0-10	ASTM D7684*		3	2	3
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1	1	
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

CONTAMINANTS

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>20	3	3	2
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*		0.3	0.3	0
Nitration	Abs/cm	ASTM D7624*	>20	4.2	4.3	4.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	14.7	14.7	14.5
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

OIL CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>75	17	▲ 21	8
Boron	ppm	ASTM D5185(m)	0	8	9	5
Barium	ppm	ASTM D5185(m)		<1	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	121	126	119
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		20	20	25
Calcium	ppm	ASTM D5185(m)	1890	2807	2826	2930
Phosphorus	ppm	ASTM D5185(m)	680	1092	1074	1173
Zinc	ppm	ASTM D5185(m)	750	1226	1245	1216
Sulfur	ppm	ASTM D5185(m)		2927	2744	2810
Oxidation	Abs/.1mm	ASTM D7414*	>25	7.2	7.3	7.6
Base Number (BN)	mg KOH/g	ASTM D2896*	6.0	9.12	9.60	10.53
Visc @ 100°C	cSt	ASTM D7279(m)	11.5	11.5	11.5	11.3
Lubricant Degradation	Scale 0-10	ASTM D7684*				


Ferrous Alloys

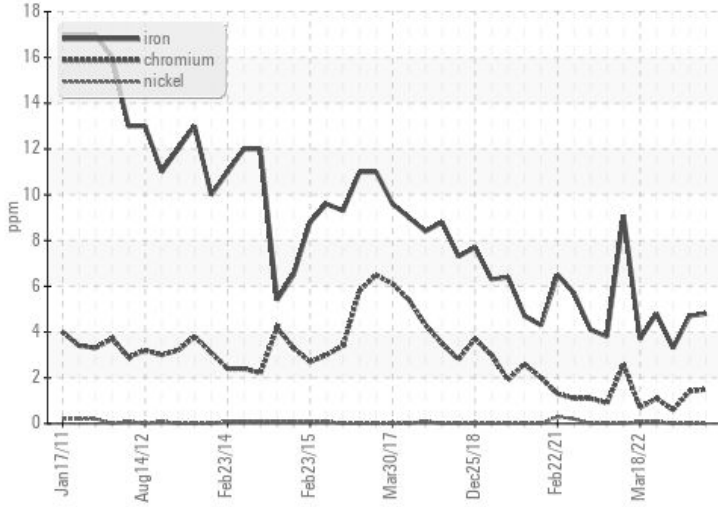


Non-ferrous Metals

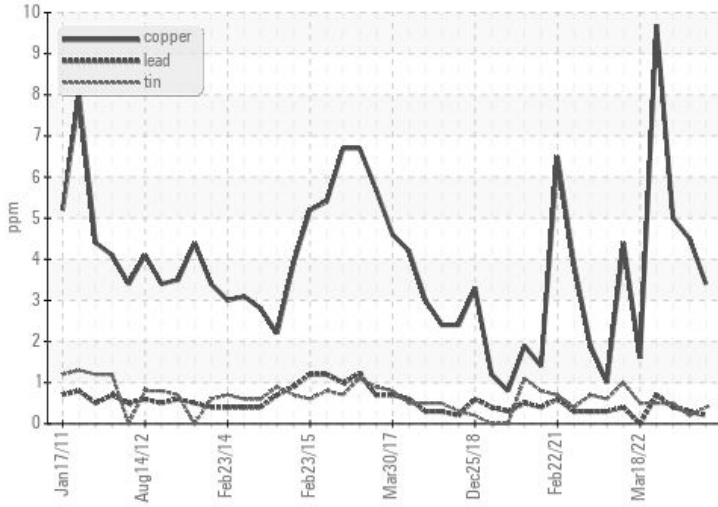


Viscosity @ 100°C

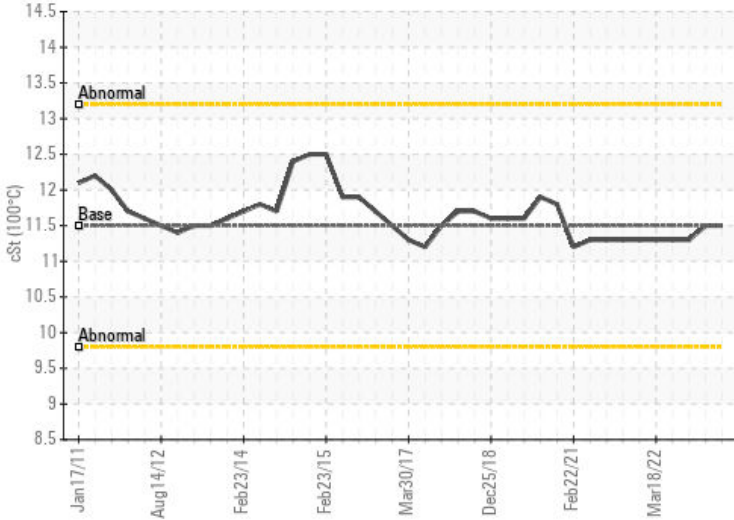

PQ

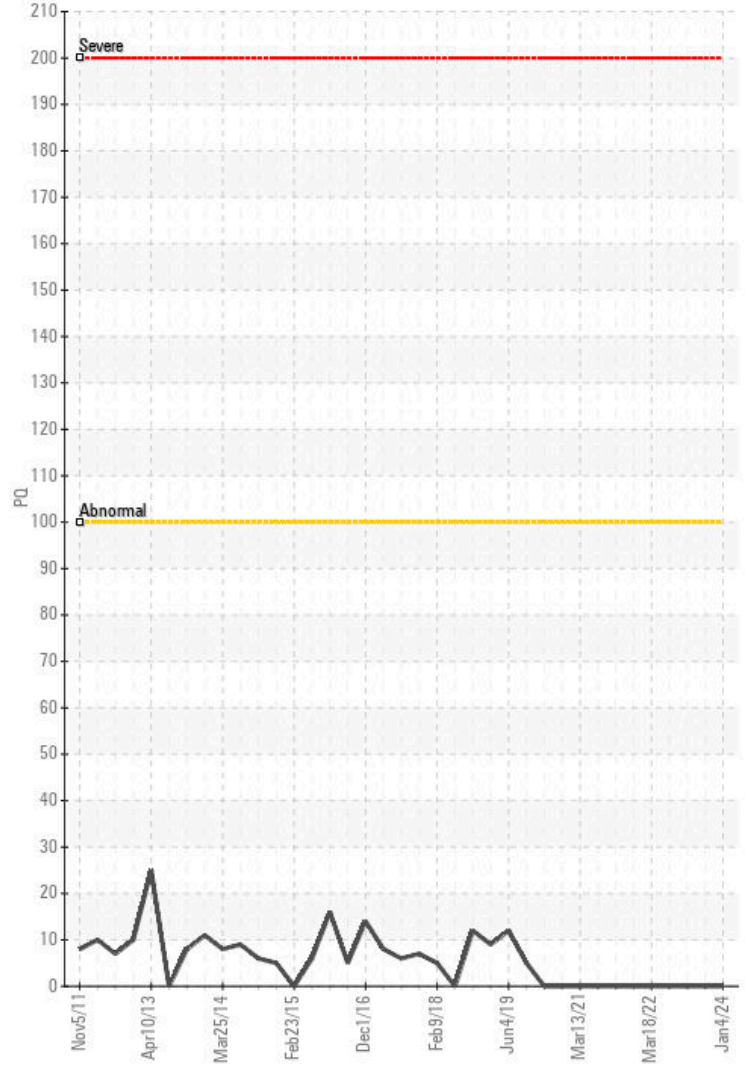

Base Number

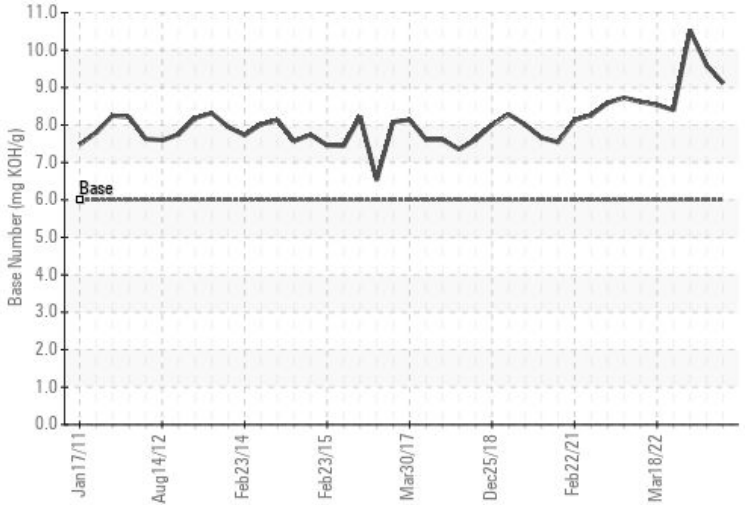

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0855489
Lab Number : 02606873
Unique Number : 5707959
Test Package : MAR 3 (Additional Tests: Visual)

CANADIAN COAST GUARD

CCGS GRIFFON, PO BOX 1000, 401 KING ST.W
 Prescott, ON
 CA K6V 5T3
 Contact: Laurie Bosley
 Laurie.Bosley@dfo-mpo.gc.ca
 T:
 F: (519)383-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank