



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**[6061]**  
 Machine Id  
**2101**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE 15W40 (--- GAL)**

## RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
 Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0875077</b>	WC0858020	WC0843566
Sample Date		Client Info		<b>21 Dec 2023</b>	01 Nov 2023	20 Sep 2023
Machine Age	kms	Client Info		<b>266802</b>	251659	242684
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	<b>10</b>	5	5
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>1</b>	1	<1
Lead	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>100	<b>1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>6	<b>0.3</b>	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.4</b>	7.7	7.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.2</b>	19.5	19.8
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


Additive levels indicate the addition of a different brand, or type of oil.  
 The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>3</b>	2	3
Boron	ppm	ASTM D5185(m)	39	<b>9</b>	9	8
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)	49	<b>10</b>	8	9
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	616	<b>57</b>	36	29
Calcium	ppm	ASTM D5185(m)	1554	<b>2137</b>	2231	2268
Phosphorus	ppm	ASTM D5185(m)	899	<b>838</b>	866	890
Zinc	ppm	ASTM D5185(m)	1069	<b>995</b>	1025	1046
Sulfur	ppm	ASTM D5185(m)	2624	<b>3055</b>	2955	2983
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.2</b>	12.7	13.4
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	<b>13.0</b>	13.3	13.6


Viscosity @ 100°C

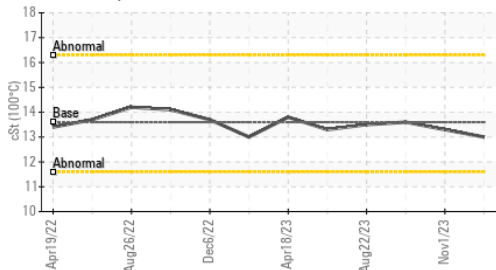


Additives

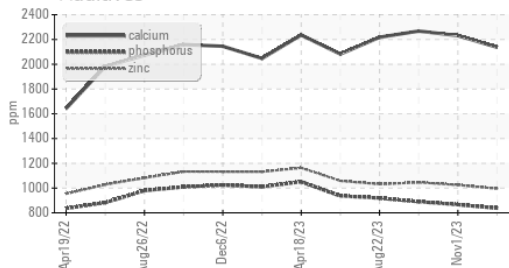


Iron (ppm)

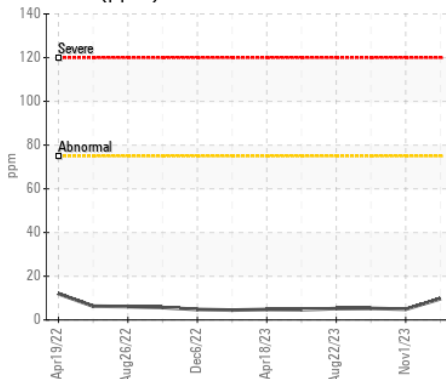


Lead (ppm)

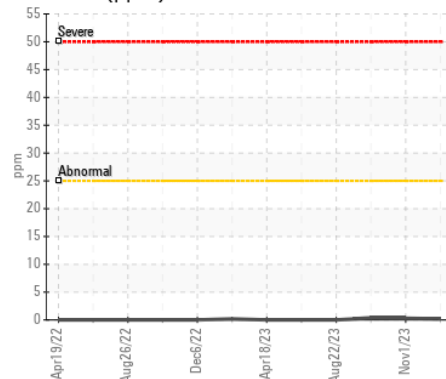


Aluminum (ppm)

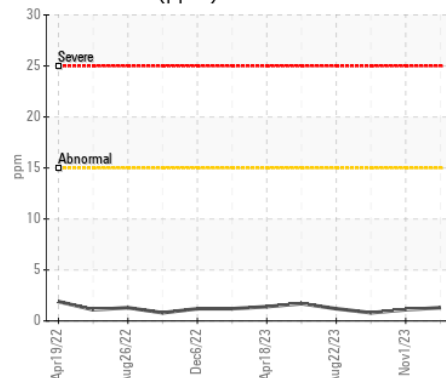


Chromium (ppm)

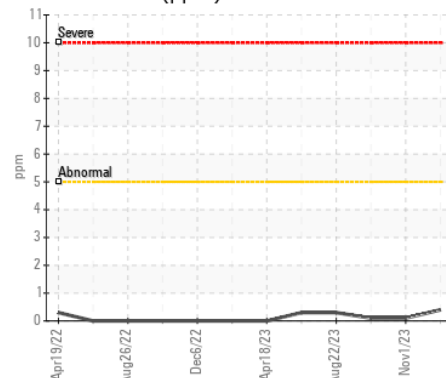


Copper (ppm)

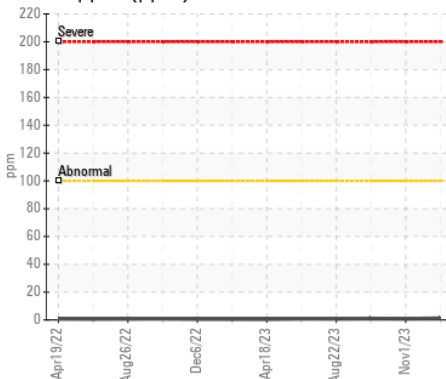


Silicon (ppm)

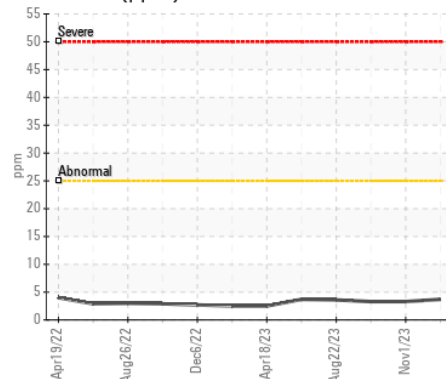

Viscosity @ 100°C

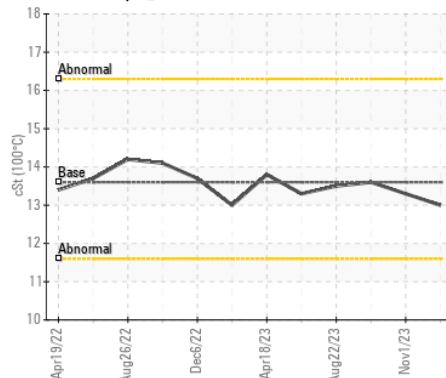

Soot %

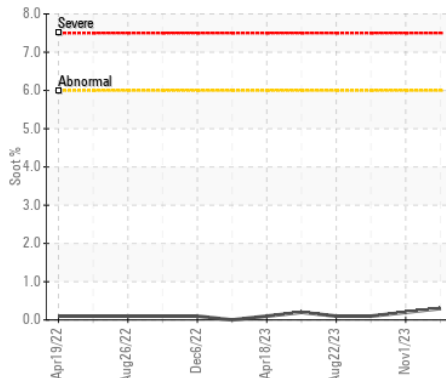

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0875077 **Received** : 08 Jan 2024  
**Lab Number** : 02606939 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 5708025 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

**MVT Canadian Bus**  
 133 Welham Road  
 Barrie, ON  
 CA L4N 8Y3  
 Contact: Kyle Trew  
 kyle.trew@mvtcanada.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: