



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[23404]
 Machine Id
NO UNIT WC0876501
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0876501	---	---
Sample Date		Client Info		04 Jan 2024	---	---
Machine Age	kms	Client Info		89758	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>65	10	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>3	<1	---	---
Titanium	ppm	ASTM D5185(m)	>5	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>35	7	---	---
Lead	ppm	ASTM D5185(m)	>10	<1	---	---
Copper	ppm	ASTM D5185(m)	>180	9	---	---
Tin	ppm	ASTM D5185(m)	>8	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	10	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.8	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	4	---	---
Boron	ppm	ASTM D5185(m)	250	28	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	41	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	499	---	---
Calcium	ppm	ASTM D5185(m)	3000	1675	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	730	---	---
Zinc	ppm	ASTM D5185(m)	1350	875	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2140	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	21.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.8	---	---

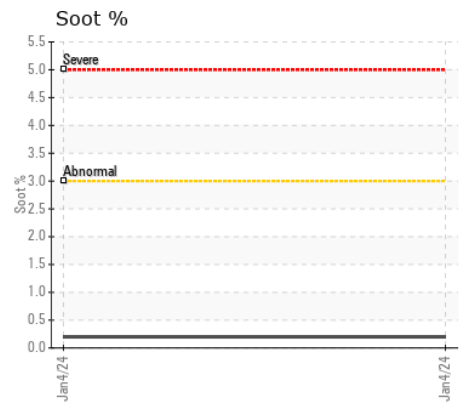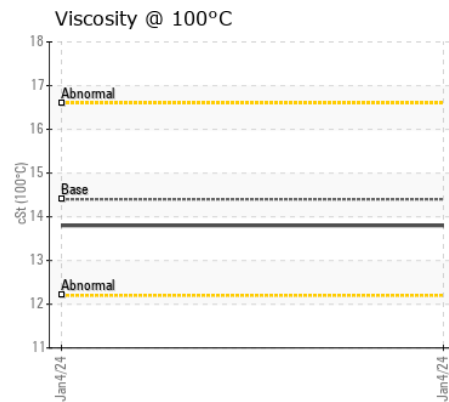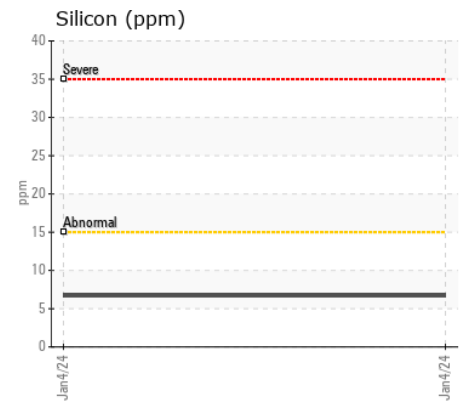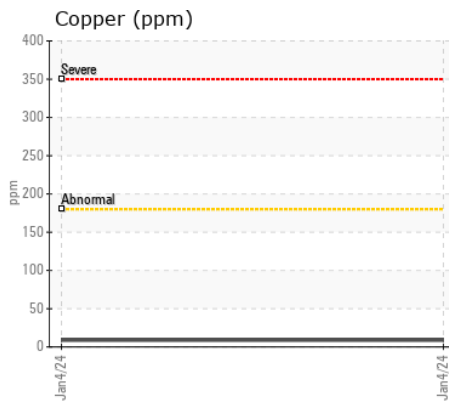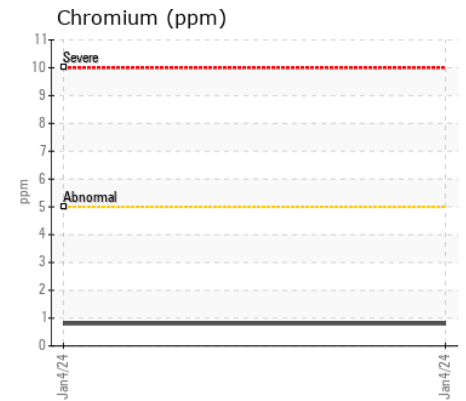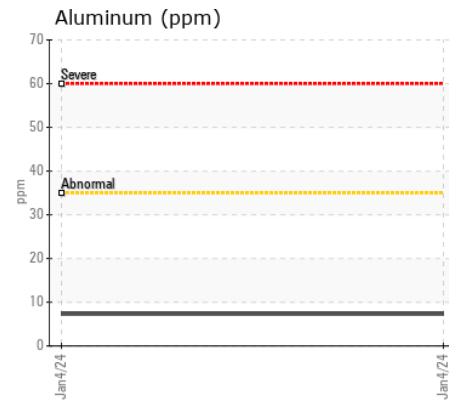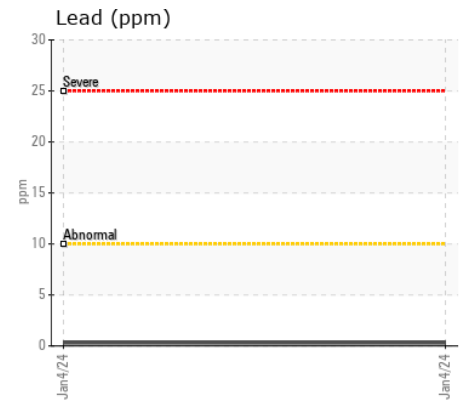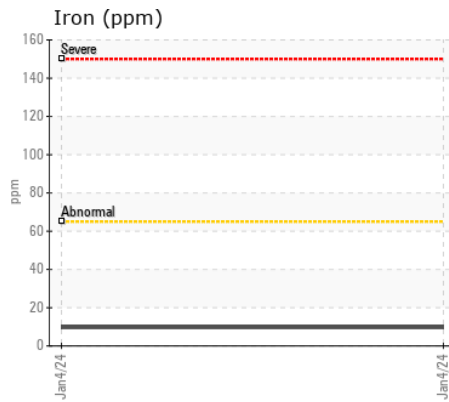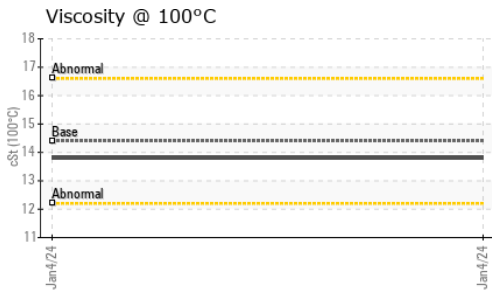

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0876501 **Received** : 08 Jan 2024
Lab Number : 02606960 **Diagnosed** : 08 Jan 2024
Unique Number : 5708046 **Diagnostician** : Wes Davis
Test Package : MOB 1

OX FLEET CARE
 466 HIGHWAY 52
 DUNDAS, ON
 CA L9H 5E2
 Contact: Robert Hughes
 robert.hughes@ox-equipment.com
 T: (289)683-6037
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.