



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
LKQ CANADA AUTO PARTS INC [390106]

Machine Id
VOLVO L90H 623925

Component
Hydraulic System

Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP391996	---	---
Sample Date		Client Info		05 Jan 2024	---	---
Machine Age	hrs	Client Info		11982	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	6	---	---
Chromium	ppm	ASTM D5185(m)	>20	3	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>20	2	---	---
Copper	ppm	ASTM D5185(m)	>150	5	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>20	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647		1674	---	---
Particles >6µm		ASTM D7647	>2500	476	---	---
Particles >14µm		ASTM D7647	>80	21	---	---
Particles >21µm		ASTM D7647	>20	3	---	---
Particles >38µm		ASTM D7647	>4	1	---	---
Particles >71µm		ASTM D7647	>3	1	---	---
Oil Cleanliness		ISO 4406 (c)	>-/18/13	18/16/12	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	14	0	---	---
Barium	ppm	ASTM D5185(m)	0.0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0.0	0	---	---
Manganese	ppm	ASTM D5185(m)	0.0	0	---	---
Magnesium	ppm	ASTM D5185(m)	2.6	2	---	---
Calcium	ppm	ASTM D5185(m)	49	54	---	---
Phosphorus	ppm	ASTM D5185(m)	354	330	---	---
Zinc	ppm	ASTM D5185(m)	419	410	---	---
Sulfur	ppm	ASTM D5185(m)	3719	3123	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	46	40.3	---	---

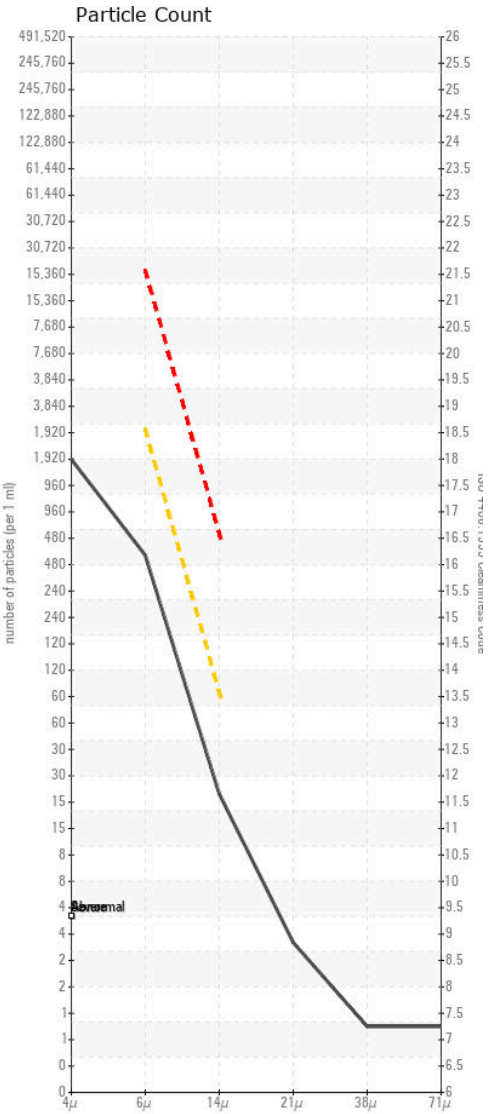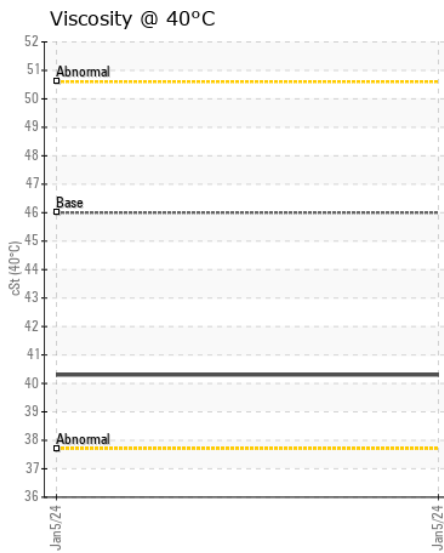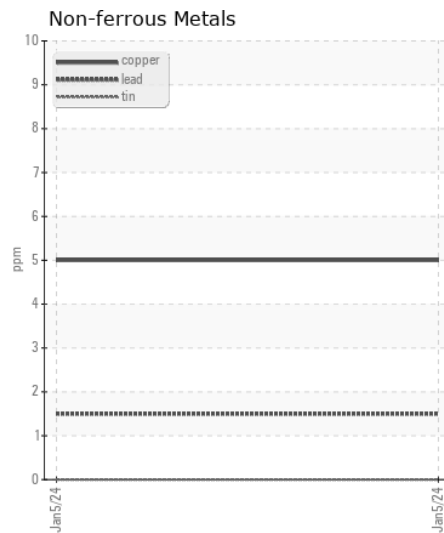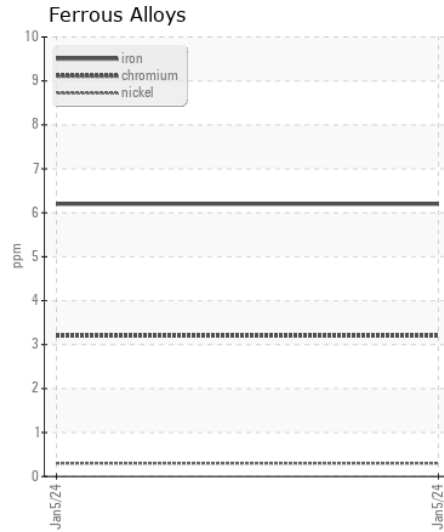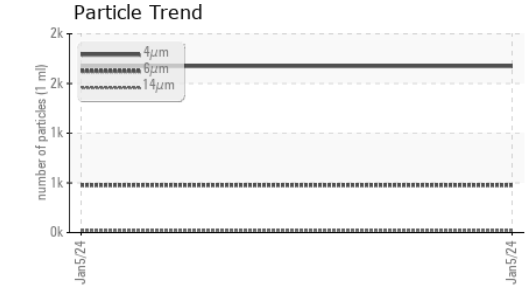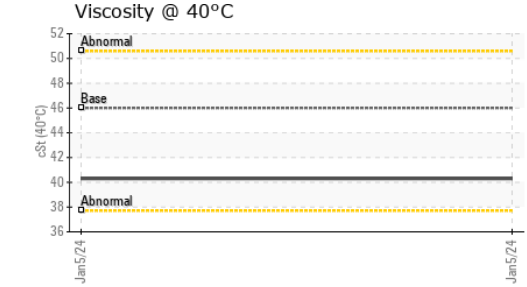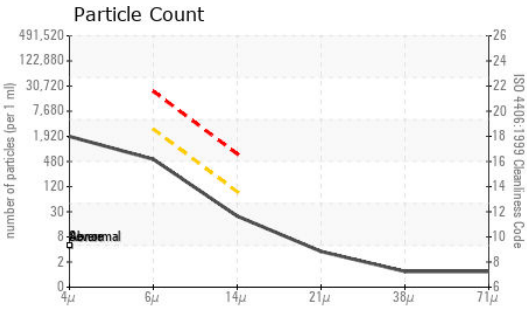

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP391996 **Received** : 08 Jan 2024
Lab Number : 02607153 **Diagnosed** : 11 Jan 2024
Unique Number : 5708239 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

STRONGCO EQUIPMENT INC.
 1640 ENTERPRISE ROAD
 MISSISSAUGA, ON
 CA L4W 4L4
 Contact: Jamal Harvey
 jharvey@strongco.com
 T:
 F: (905)670-2338

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.