



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L566 074234-1758
Component
Transmission (Manual)
Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0155027	---	---
Sample Date		Client Info		29 Dec 2023	---	---
Machine Age	hrs	Client Info		1395	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	10	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>7	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	1	---	---
Lead	ppm	ASTM D5185(m)	>45	<1	---	---
Copper	ppm	ASTM D5185(m)	>225	2	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>125	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		15	---	---
Boron	ppm	ASTM D5185(m)	10	101	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	10	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	100	6	---	---
Calcium	ppm	ASTM D5185(m)	3500	3473	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	1180	---	---
Zinc	ppm	ASTM D5185(m)	1150	1437	---	---
Sulfur	ppm	ASTM D5185(m)	5000	4767	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	48	42.8	---	---

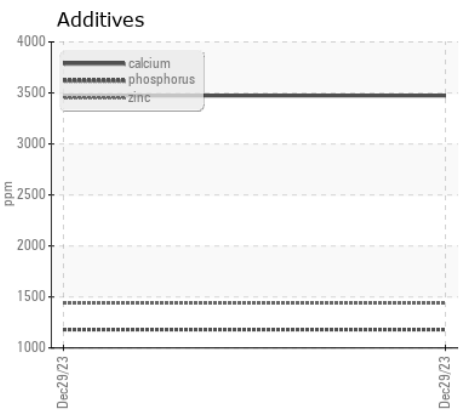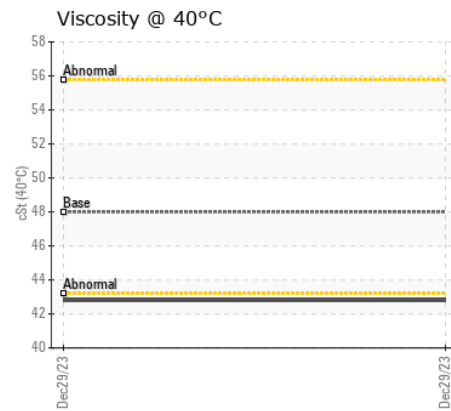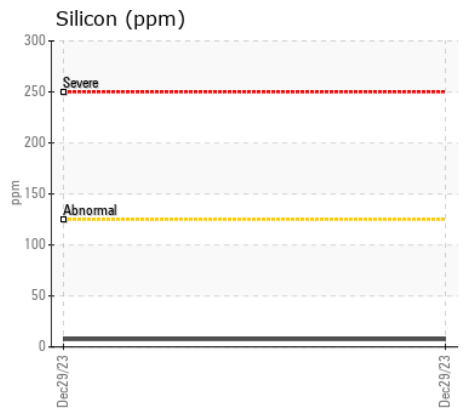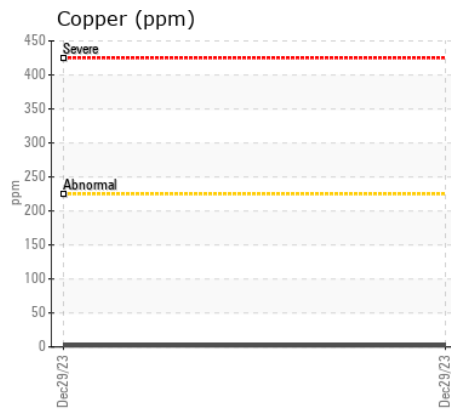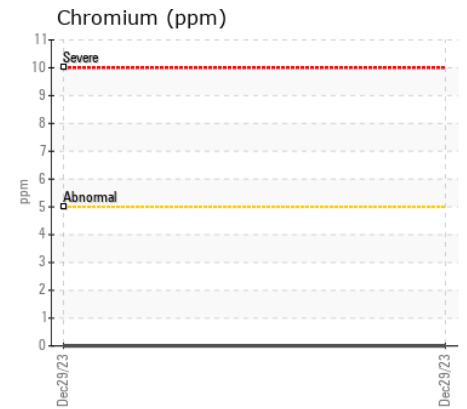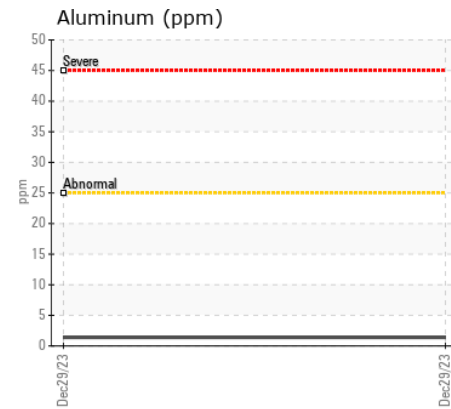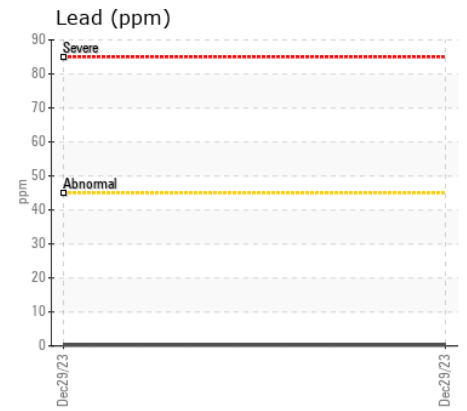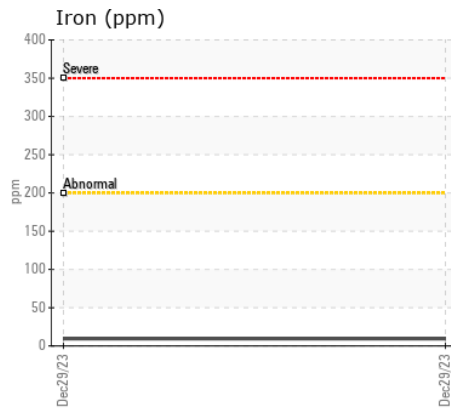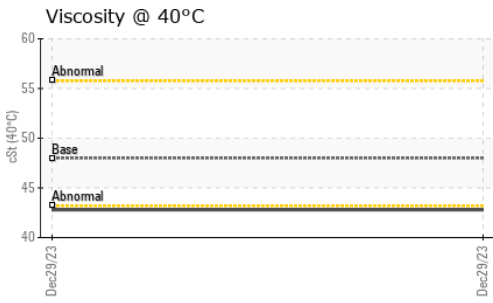

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0155027 **Received** : 08 Jan 2024
Lab Number : 02607184 **Diagnosed** : 09 Jan 2024
Unique Number : 5708270 **Diagnostician** : Kevin Marson
Test Package : MOB 1

Groupe Label Inc div Nouvelle
 521 Route 132 Ouest
 Nouvelle-Ouest, QC
 CA G0C 2G0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: