

Area  
**MICHAUDVILLE**  
Machine Id  
**1222**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

**WEAR**

All component wear rates are normal.











**CONTAMINATION**

There is no indication of any contamination in the fluid.

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0072114</b>	PC0078107	PC0071935
Sample Date		Client Info		<b>07 Jan 2024</b>	17 Oct 2023	24 Jul 2023
Machine Age	hrs	Client Info		<b>10098</b>	9687	9198
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>160	<b>44</b>	39	35
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>18</b>	17	16
Lead	ppm	ASTM D5185(m)	>50	<b>5</b>	5	5
Copper	ppm	ASTM D5185(m)	>225	<b>15</b>	14	12
Tin	ppm	ASTM D5185(m)	>10	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	<b>7</b>	6	6
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>3</b>	3	2
Boron	ppm	ASTM D5185(m)		<b>70</b>	75	70
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>124</b>	113	110
Phosphorus	ppm	ASTM D5185(m)		<b>214</b>	213	227
Zinc	ppm	ASTM D5185(m)		<b>7</b>	4	4
Sulfur	ppm	ASTM D5185(m)		<b>1463</b>	1328	1345
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>32.7</b>	32.9	33.3
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	<b>6.5</b>	6.6	6.5
Viscosity Index (VI)	Scale	ASTM D2270*	155	<b>157</b>	160	152

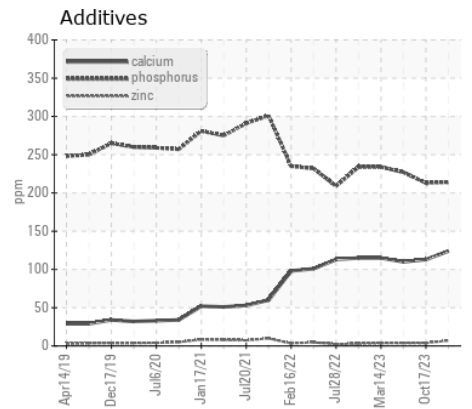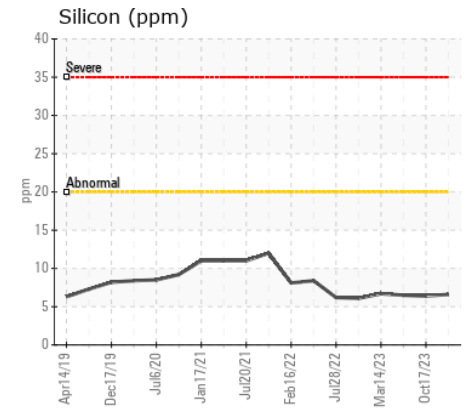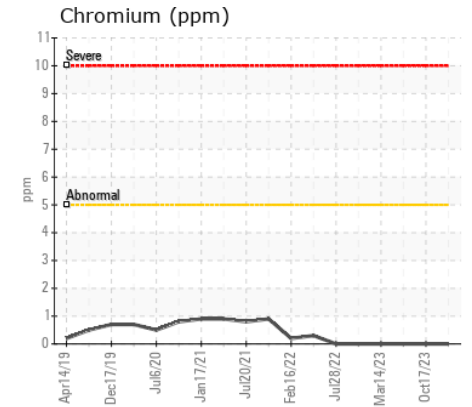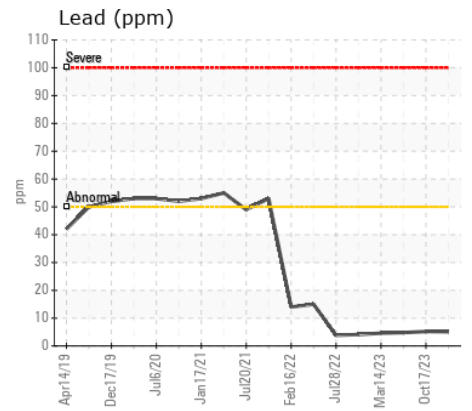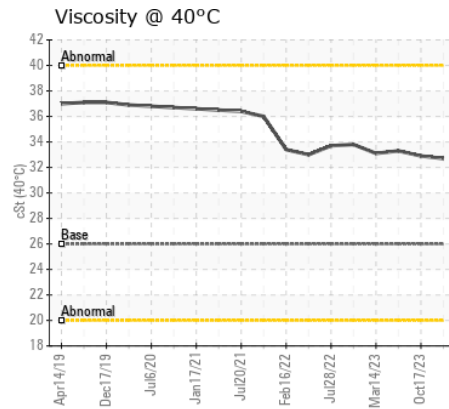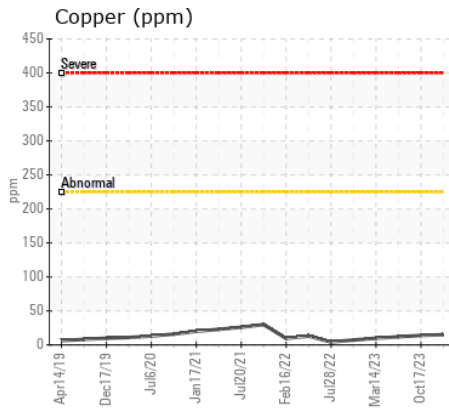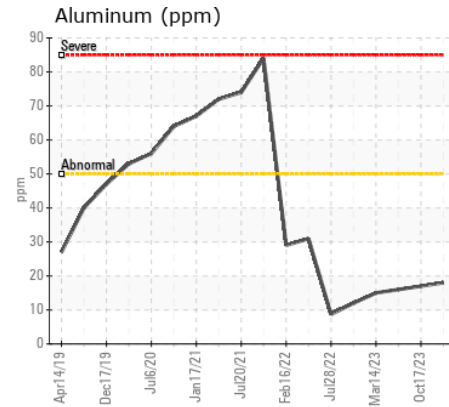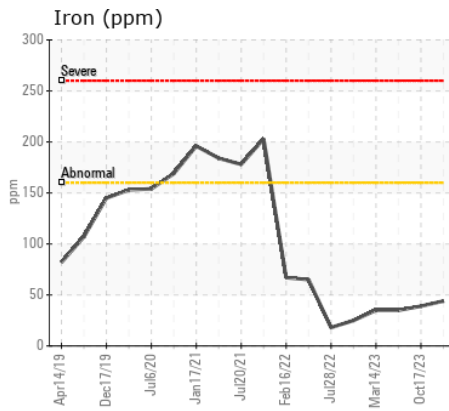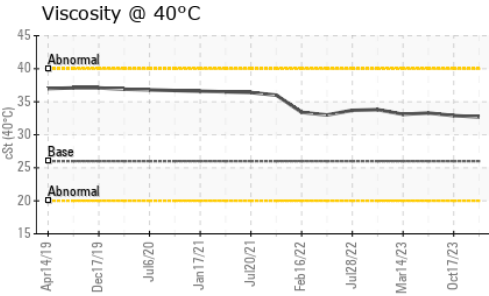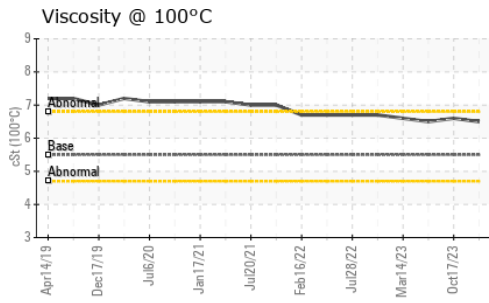

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.  
**Sample No.** : PC0072114 **Received** : 08 Jan 2024  
**Lab Number** : 02607222 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 5708308 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

270 RUE BRUNET  
MONT ST-HILAIRE, QC  
CA J3H 0M6  
Contact: Martin Trudel  
mtrudel@michaudville.com

T:  
F: