



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**LIEBHERR L566 071183-1758**  
Component  
**Rear Left Wheel Hub**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0251938	---	---
Sample Date		Client Info		29 Dec 2023	---	---
Machine Age	hrs	Client Info		3102	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	68	---	---
Chromium	ppm	ASTM D5185(m)	>8	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	2	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	---	---
Lead	ppm	ASTM D5185(m)	>5	<1	---	---
Copper	ppm	ASTM D5185(m)	>50	18	---	---
Tin	ppm	ASTM D5185(m)		<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	4	---	---
Magnesium	ppm	ASTM D5185(m)	<1	<1	---	---
Calcium	ppm	ASTM D5185(m)	<1	8	---	---
Phosphorus	ppm	ASTM D5185(m)	2143	2279	---	---
Zinc	ppm	ASTM D5185(m)	<1	33	---	---
Sulfur	ppm	ASTM D5185(m)	23468	25157	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	188	---	---

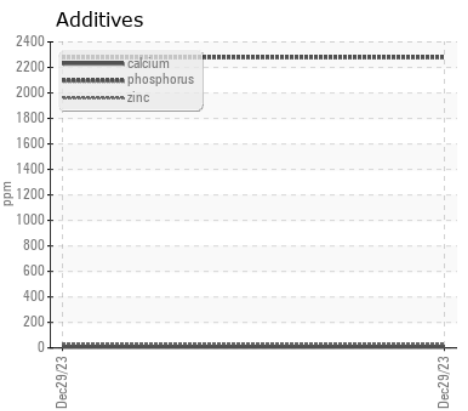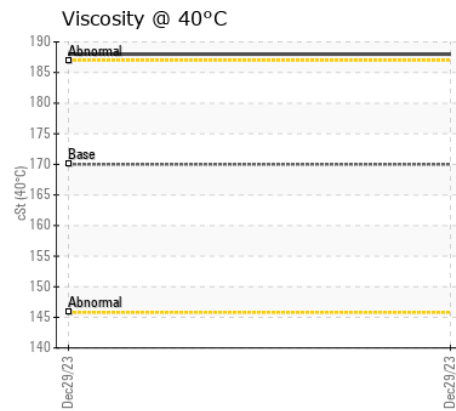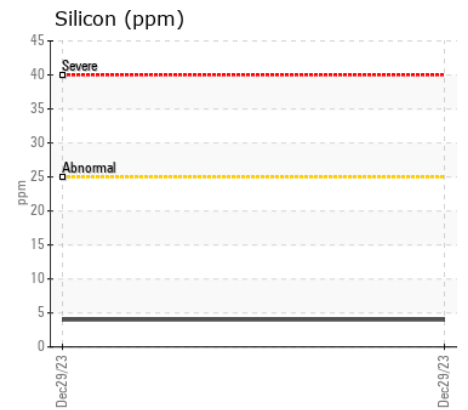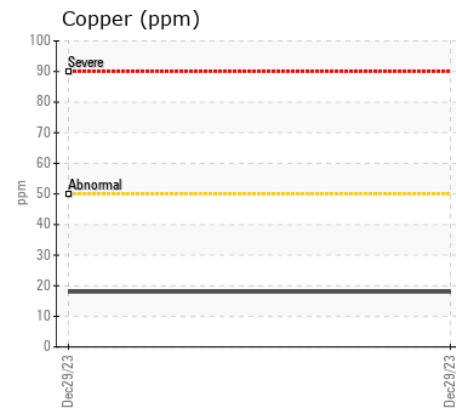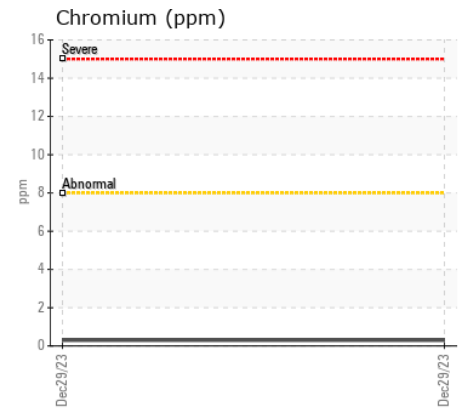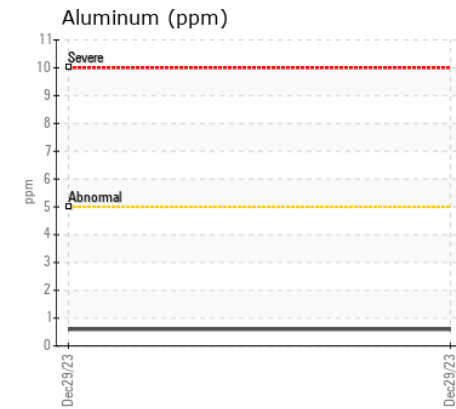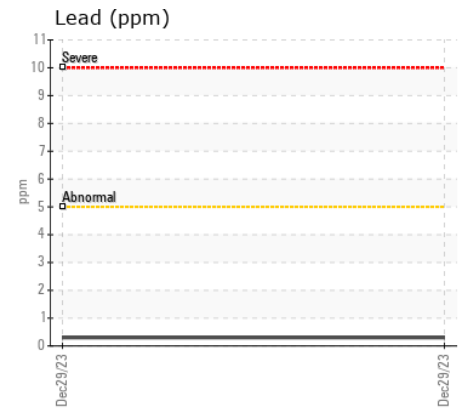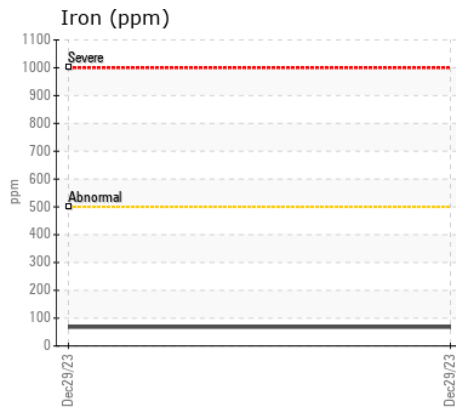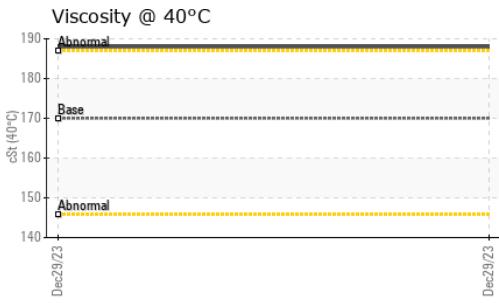

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0251938 **Received** : 08 Jan 2024  
**Lab Number** : 02607250 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 5708336 **Diagnostician** : Wes Davis  
**Test Package** : MOBCE ( Additional Tests: Visual )

**Abbycel Substrate Ltd.**  
 3545 Ross Road  
 Abbotsford, BC  
 CA V4X 1M6  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: