



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L566 071183-1758
Component
Front Right Wheel Hub
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0251937	---	---
Sample Date		Client Info		29 Dec 2023	---	---
Machine Age	hrs	Client Info		3102	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	101	---	---
Chromium	ppm	ASTM D5185(m)	>8	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	2	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	---	---
Lead	ppm	ASTM D5185(m)	>5	<1	---	---
Copper	ppm	ASTM D5185(m)	>50	28	---	---
Tin	ppm	ASTM D5185(m)		2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	6	---	---
Magnesium	ppm	ASTM D5185(m)	<1	<1	---	---
Calcium	ppm	ASTM D5185(m)	<1	6	---	---
Phosphorus	ppm	ASTM D5185(m)	2143	2269	---	---
Zinc	ppm	ASTM D5185(m)	<1	23	---	---
Sulfur	ppm	ASTM D5185(m)	23468	25240	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	187	---	---

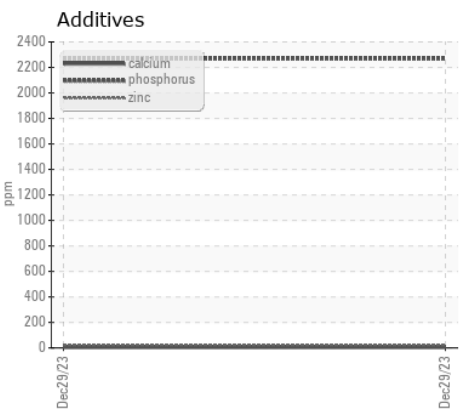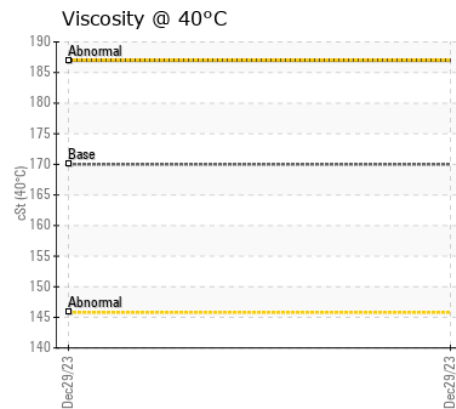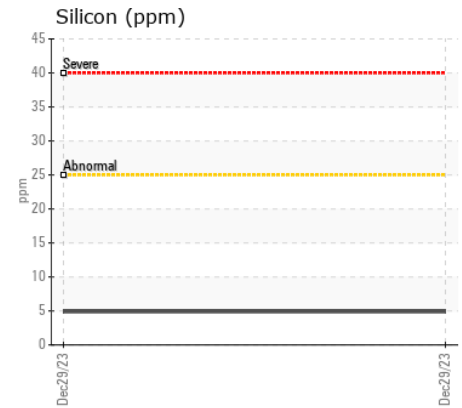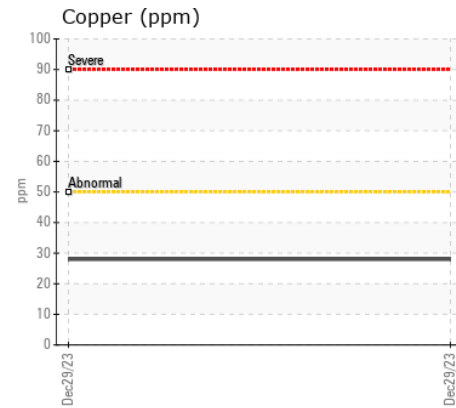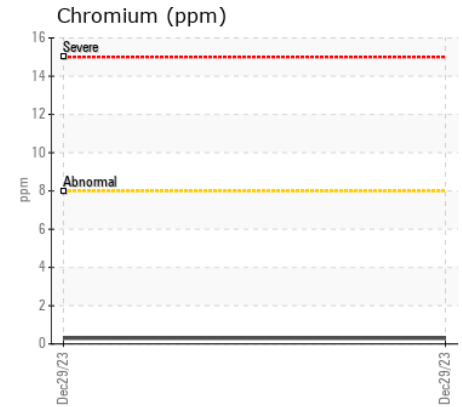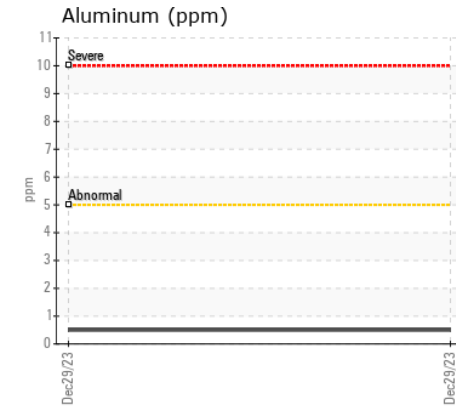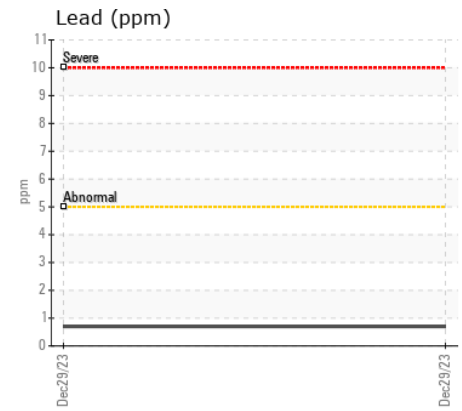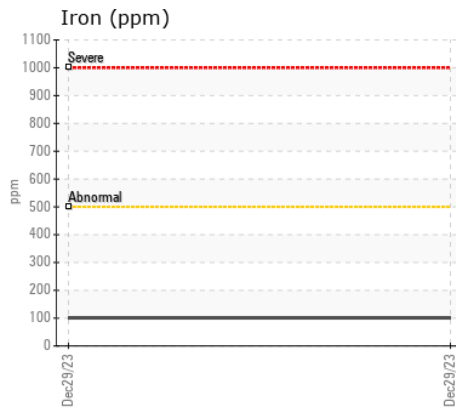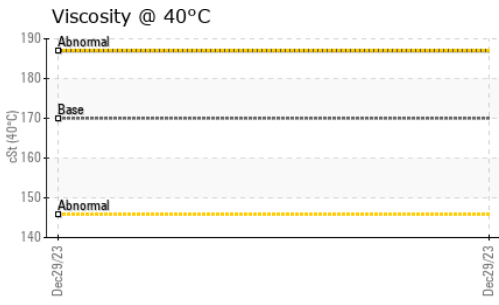

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0251937 **Received** : 08 Jan 2024
Lab Number : 02607252 **Diagnosed** : 09 Jan 2024
Unique Number : 5708338 **Diagnostician** : Kevin Marson
Test Package : MOBCE (Additional Tests: Visual)

Abbycel Substrate Ltd.
 3545 Ross Road
 Abbotsford, BC
 CA V4X 1M6
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: