



Machine Id  
**701050**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0097435</b>	GFL0085678	GFL0077308
Sample Date		Client Info		<b>04 Jan 2024</b>	05 Oct 2023	12 Jul 2023
Machine Age	hrs	Client Info		<b>514</b>	514	0
Oil Age	hrs	Client Info		<b>514</b>	514	0
Filter Age	hrs	Client Info		<b>514</b>	514	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>MARGINAL</b>	NORMAL	NORMAL

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>80	<b>17</b>	19	16
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>30	<b>3</b>	2	1
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>150	<b>1</b>	2	2
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>6</b>	4	5
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	1	<1
Fuel	%	ASTM D7593*	>5	<b>▲ 4.8</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.4	0.4
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.3</b>	10.0	10.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.5</b>	21.8	21.7
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>55</b>	58	58
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>886</b>	930	937
Calcium	ppm	ASTM D5185(m)	1070	<b>981</b>	1008	1021
Phosphorus	ppm	ASTM D5185(m)	1150	<b>917</b>	943	1003
Zinc	ppm	ASTM D5185(m)	1270	<b>1104</b>	1168	1165
Sulfur	ppm	ASTM D5185(m)	2060	<b>2318</b>	2252	2275
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.7</b>	19.0	19.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>12.6</b>	13.2	13.7

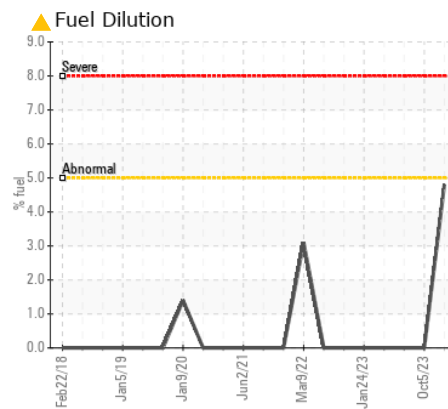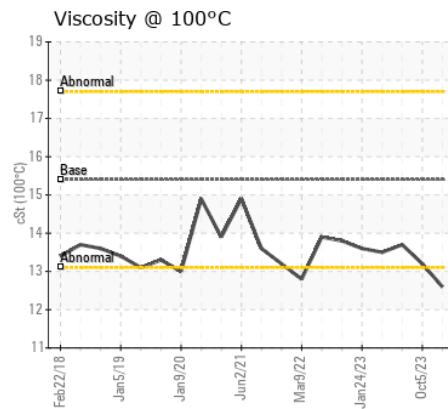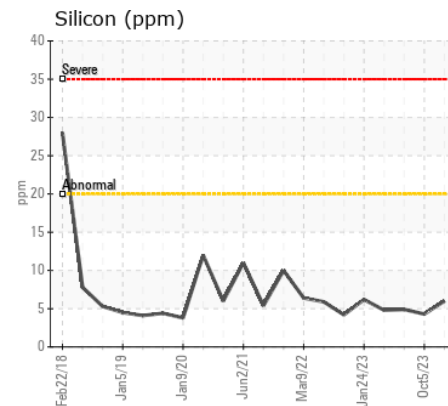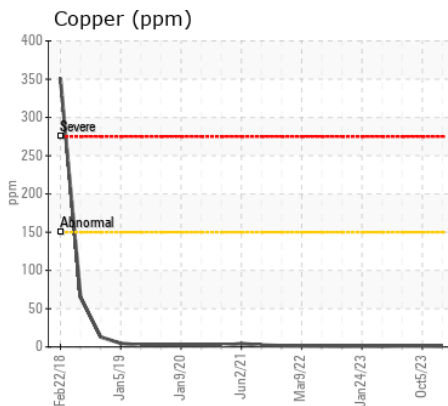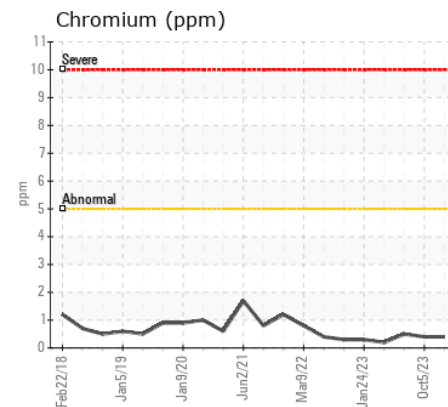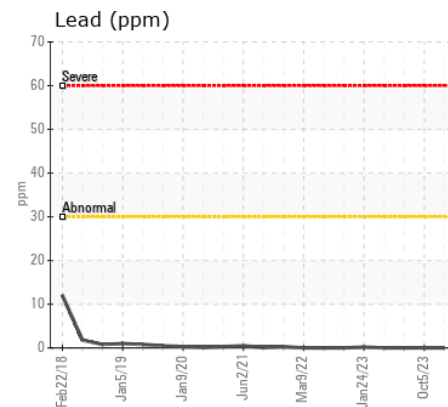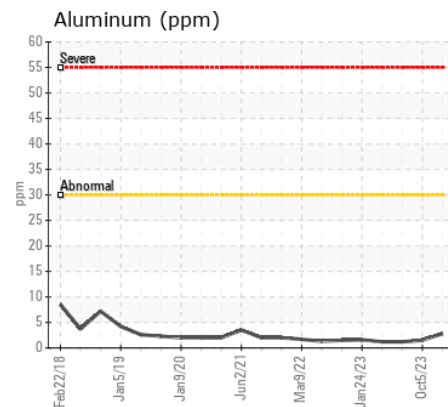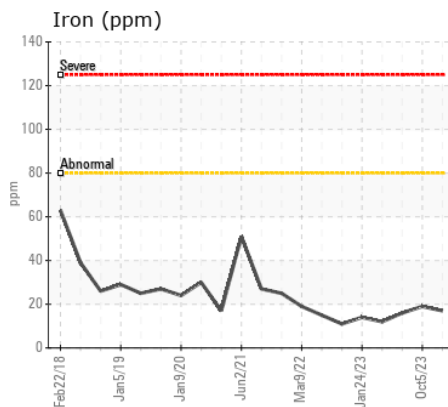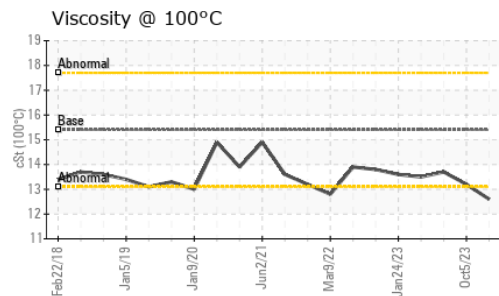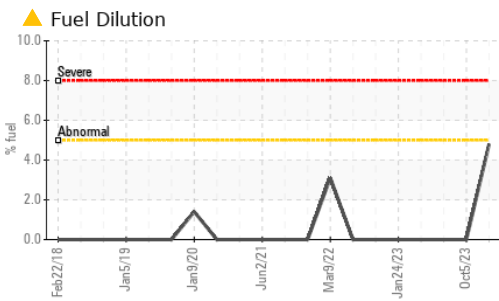

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 221 - Windsor**  
**Sample No.** : GFL0097435 **Received** : 09 Jan 2024  
**Lab Number** : 02607364 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 5708450 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

905 Tecumseh Road W  
Windsor, ON  
CA N8W 4J5  
Contact: Rhys Marotte  
rmarotte@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: