



Machine Id
7982
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (19 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107142	GFL0107158	WC0875083
Sample Date		Client Info		05 Jan 2024	27 Dec 2023	10 Nov 2023
Machine Age	hrs	Client Info		126359	11596	11088
Oil Age	hrs	Client Info		0	600	568
Filter Age	hrs	Client Info		0	0	568
Oil Changed		Client Info		Not Chngd	Changed	Changed
Filter Changed		Client Info		Not Chngd	Changed	Changed
Sample Status				NORMAL	MARGINAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	5	16	33
Chromium	ppm	ASTM D5185(m)	>5	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>30	2	4	3
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>150	<1	<1	1
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	3	5	8
Potassium	ppm	ASTM D5185(m)	>20	<1	0	1
Fuel		WC Method	>5	<1.0	▲ 4.7	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.4	0.8
Nitration	Abs/cm	ASTM D7624*	>20	5.9	9.1	11.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.3	23.5	24.1
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	6	9
Boron	ppm	ASTM D5185(m)	0	51	210	5
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	62	77	64
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	845	466	988
Calcium	ppm	ASTM D5185(m)	1070	1081	1254	1076
Phosphorus	ppm	ASTM D5185(m)	1150	1011	966	1003
Zinc	ppm	ASTM D5185(m)	1270	1168	1146	1229
Sulfur	ppm	ASTM D5185(m)	2060	2728	2597	2354
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.5	19.4	21.5
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.4	12.7	13.4

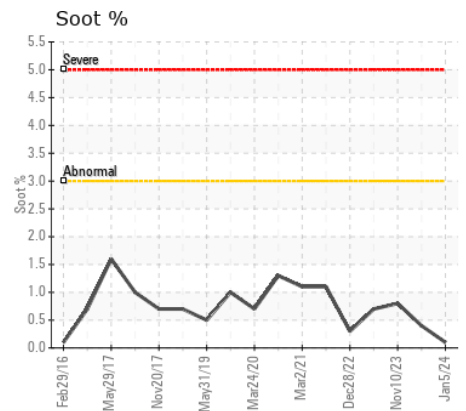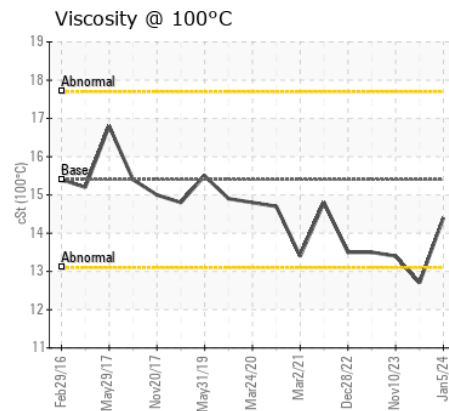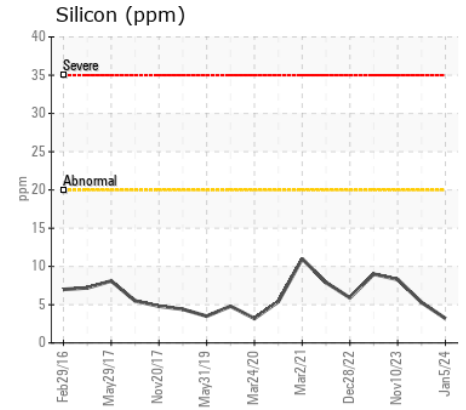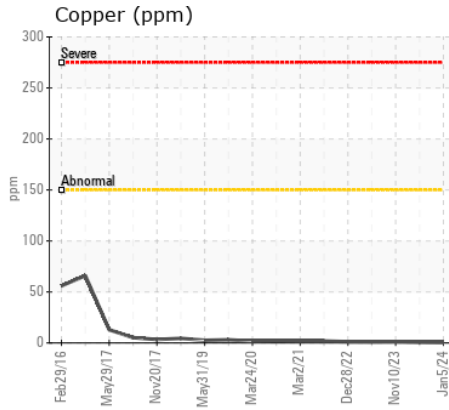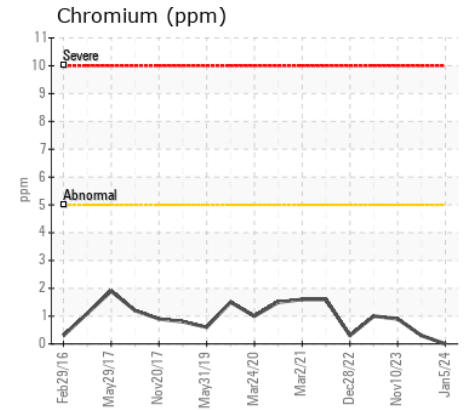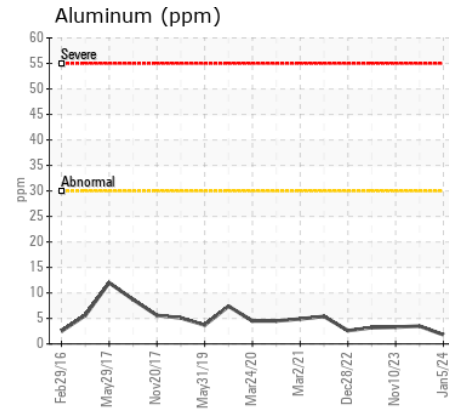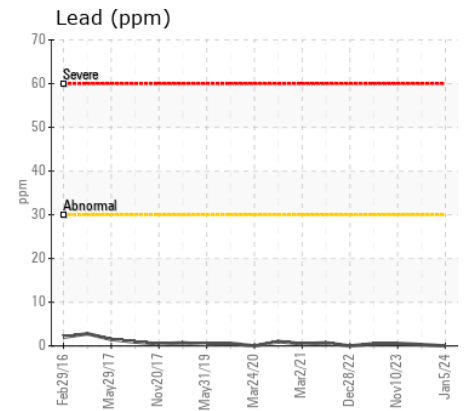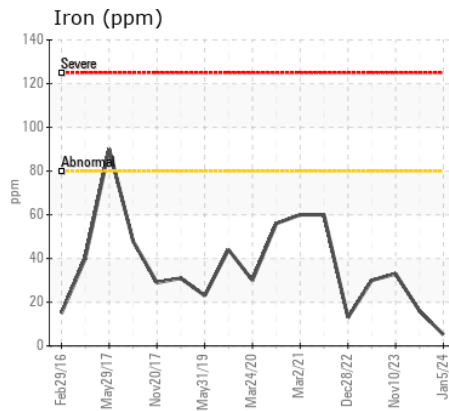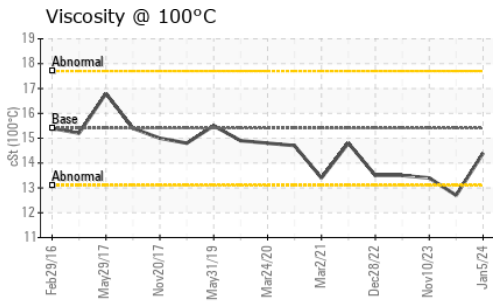

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107142
Lab Number : 02607369
Unique Number : 5708455
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 217 - Aurora
 14131 BAYVIEW AVE, AURORA YARD
 AURORA, ON
 CA L4G 0K6
 Contact: Mike Havens
 MHavens@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (905)713-2445