



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[5169]
Machine Id
VOLVO L120H 632892
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP335158	VCP382309	VCP352390
Sample Date		Client Info		20 Dec 2023	02 Jun 2023	18 Jan 2023
Machine Age	hrs	Client Info		2489	1983	1595
Oil Age	hrs	Client Info		500	500	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	11	10	18
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>30	4	4	6
Lead	ppm	ASTM D5185(m)	>40	2	1	2
Copper	ppm	ASTM D5185(m)	>20	6	6	8
Tin	ppm	ASTM D5185(m)	>20	<1	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	4	5	6
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.3	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	6.8	6.4	7.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.0	22.9	24.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	3
Boron	ppm	ASTM D5185(m)	2.5	37	47	40
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0.7	41	41	40
Manganese	ppm	ASTM D5185(m)	0.0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	256	501	506	509
Calcium	ppm	ASTM D5185(m)	2057	1684	1760	1705
Phosphorus	ppm	ASTM D5185(m)	935	935	999	1000
Zinc	ppm	ASTM D5185(m)	1223	1068	1083	1120
Sulfur	ppm	ASTM D5185(m)	4079	2508	2463	2490
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.3	20.3	20.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.0	13.1	13.4

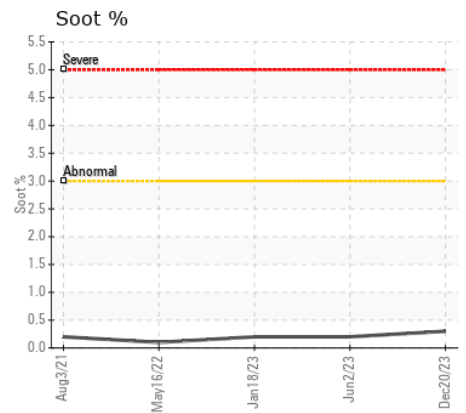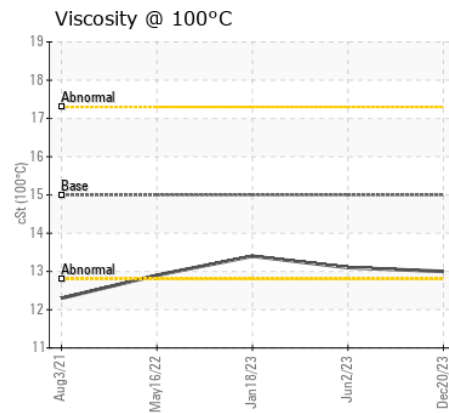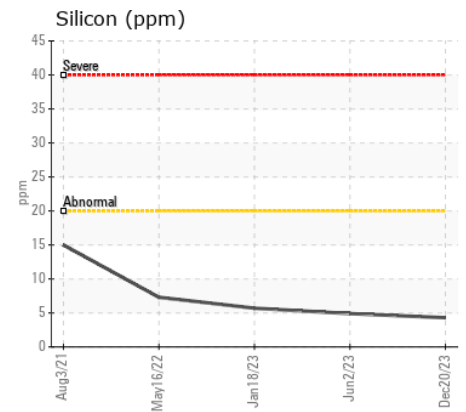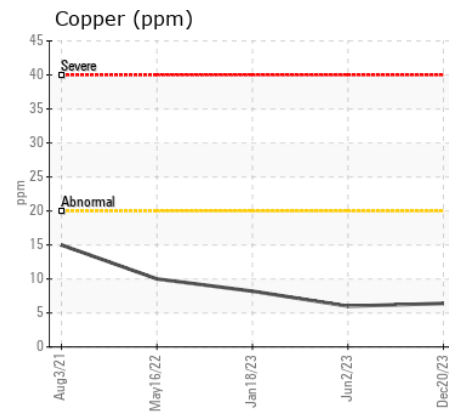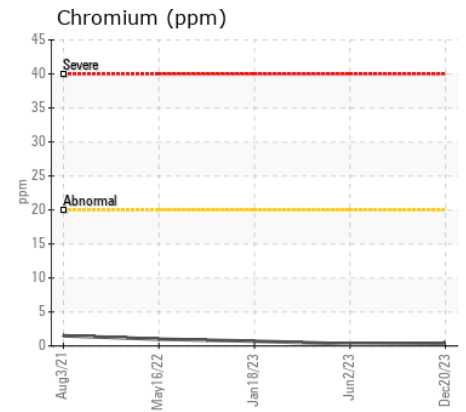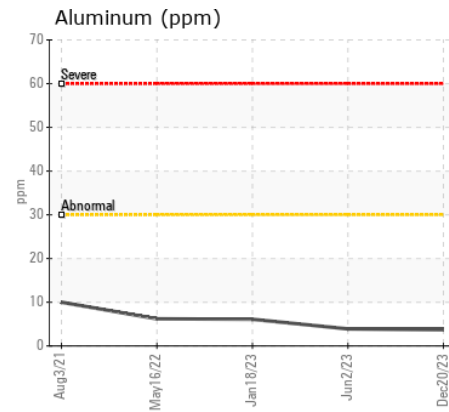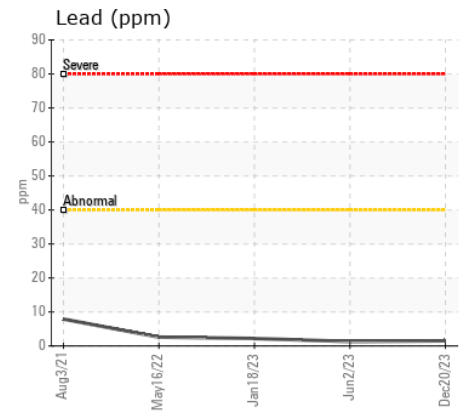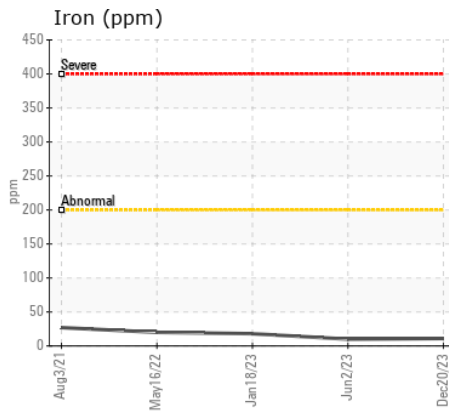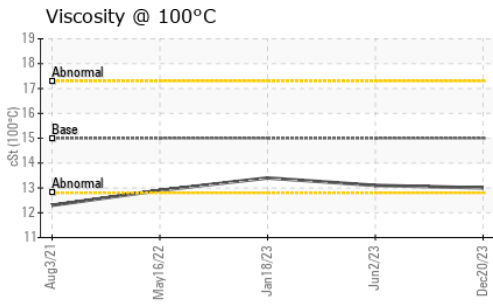

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP335158 **Received** : 09 Jan 2024
Lab Number : 02607480 **Diagnosed** : 09 Jan 2024
Unique Number : 5708566 **Diagnostician** : Wes Davis
Test Package : MOB 1

CITY OF KELOWNA
 1435 WATER STREET
 KELOWNA, BC
 CA V1Y 1J4
 Contact: Myles Bancarz
 mbancarz@kelowna.ca
 T: (250)763-6011
 F: (250)868-3330

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.