



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L110H 631929
Component
Front Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP335157	VCP381883	VCP382157
Sample Date		Client Info		20 Dec 2023	06 Jun 2023	08 Dec 2022
Machine Age	hrs	Client Info		6002	5000	4157
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	92	228	196
Chromium	ppm	ASTM D5185(m)	>20	2	4	4
Nickel	ppm	ASTM D5185(m)	>10	<1	1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	2	1	1
Lead	ppm	ASTM D5185(m)	>50	<1	1	2
Copper	ppm	ASTM D5185(m)	>120	5	16	14
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	16	14	13
Potassium	ppm	ASTM D5185(m)	>20	<1	2	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	8	9
Boron	ppm	ASTM D5185(m)		110	109	112
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		1	3	3
Manganese	ppm	ASTM D5185(m)		2	8	6
Magnesium	ppm	ASTM D5185(m)		15	13	13
Calcium	ppm	ASTM D5185(m)		4085	4060	4056
Phosphorus	ppm	ASTM D5185(m)		1330	1405	1404
Zinc	ppm	ASTM D5185(m)		1599	1580	1611
Sulfur	ppm	ASTM D5185(m)		3537	3331	3340
Visc @ 40°C	cSt	ASTM D7279(m)		42.9	40.4	40.6

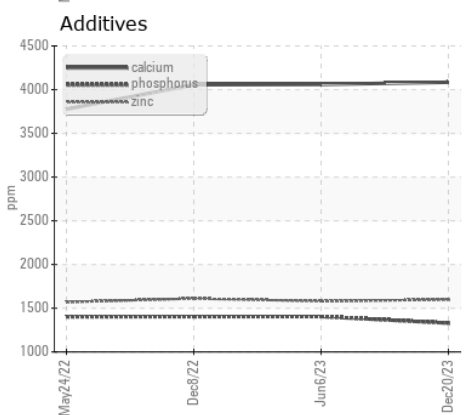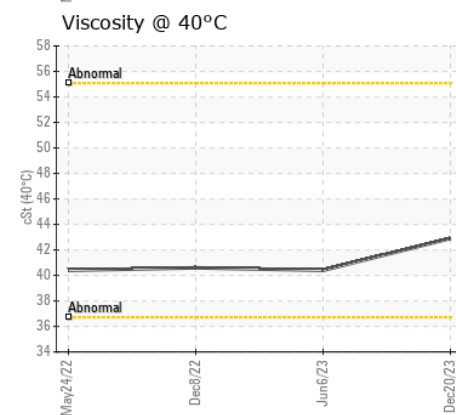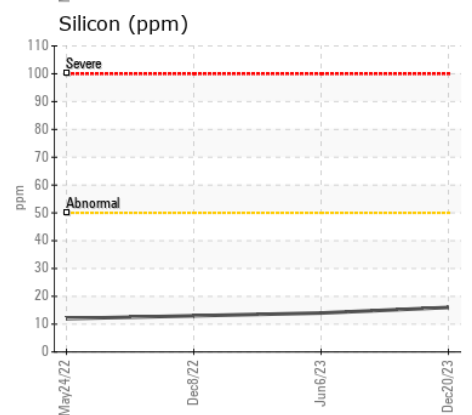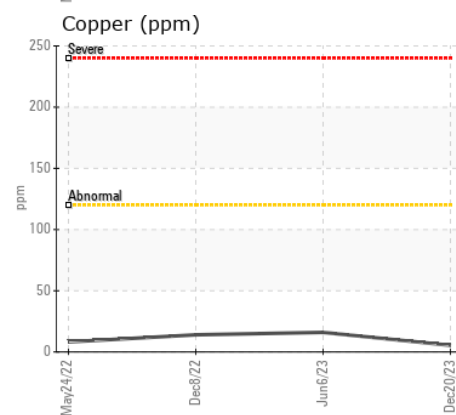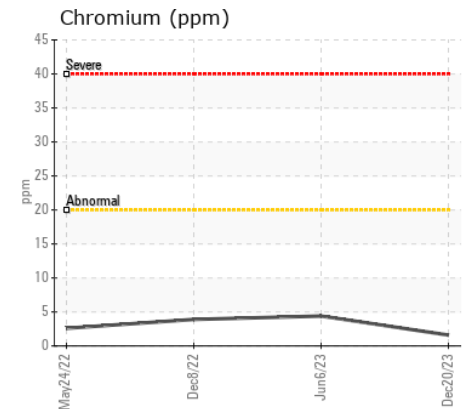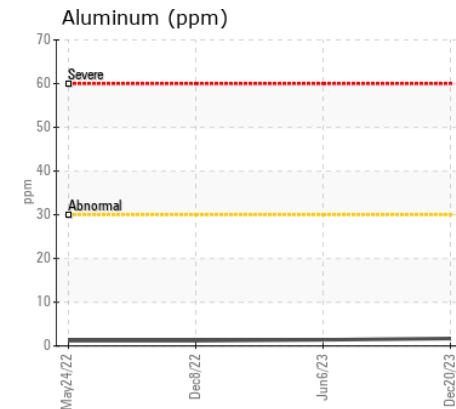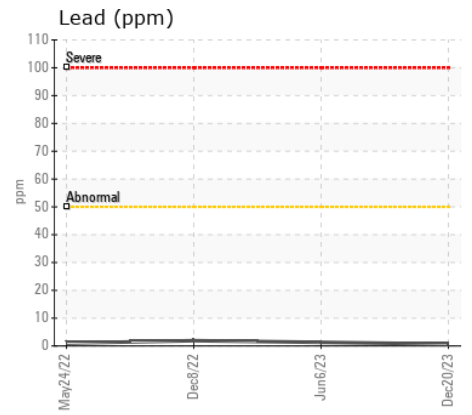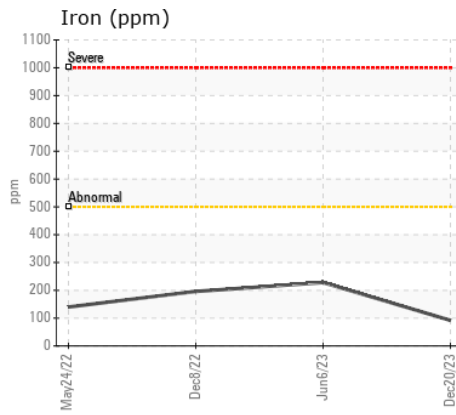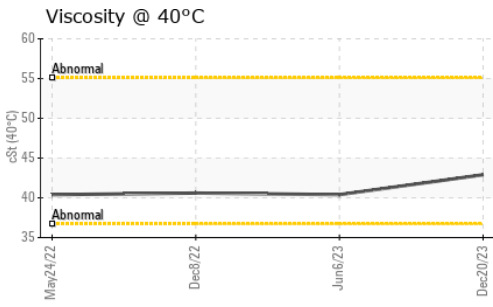

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP335157 **Received** : 09 Jan 2024
Lab Number : 02607577 **Diagnosed** : 09 Jan 2024
Unique Number : 5708663 **Diagnostician** : Wes Davis
Test Package : MOB 1

CITY OF KELOWNA
 1435 WATER STREET
 KELOWNA, BC
 CA V1Y 1J4
 Contact: Myles Bancarz
 mbancarz@kelowna.ca
 T: (250)763-6011
 F: (250)868-3330

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.