



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL207 [1204556]
Machine Id
800021
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0102708	GFL0094511	GFL0088975
Sample Date		Client Info		04 Jan 2024	25 Oct 2023	11 Aug 2023
Machine Age	hrs	Client Info		17985	17416	16818
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	29	31	30
Chromium	ppm	ASTM D5185(m)	>5	1	1	1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	2	2	2
Lead	ppm	ASTM D5185(m)	>25	0	<1	0
Copper	ppm	ASTM D5185(m)	>100	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	5	8
Potassium	ppm	ASTM D5185(m)	>20	3	5	4
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0.6	0.6	0.6
Nitration	Abs/cm	ASTM D7624*	>20	9.8	10.7	10.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.3	22.9	23.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		55	68	45
Boron	ppm	ASTM D5185(m)	0	2	2	3
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	62	62	63
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	994	994	1037
Calcium	ppm	ASTM D5185(m)	1070	1083	1097	1102
Phosphorus	ppm	ASTM D5185(m)	1150	1032	1035	1100
Zinc	ppm	ASTM D5185(m)	1270	1222	1234	1259
Sulfur	ppm	ASTM D5185(m)	2060	2613	2515	2535
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.6	21.0	20.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.4	14.8	14.8

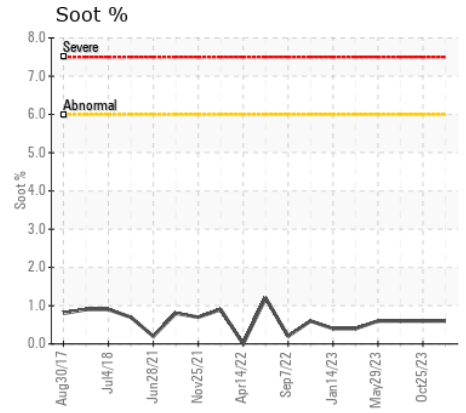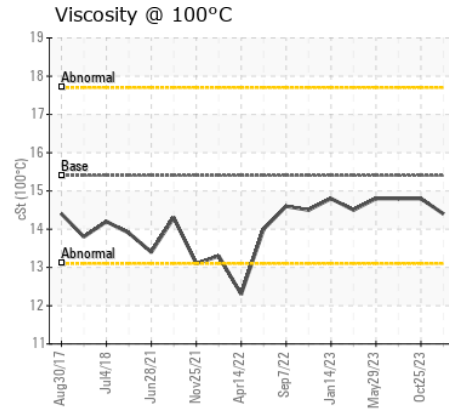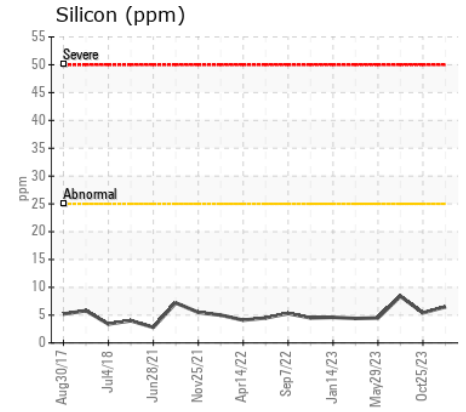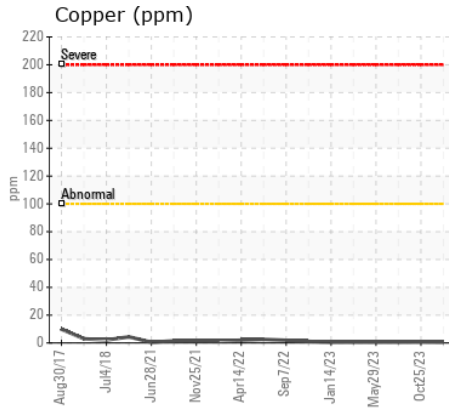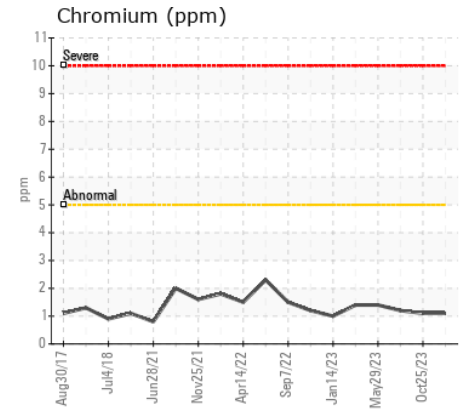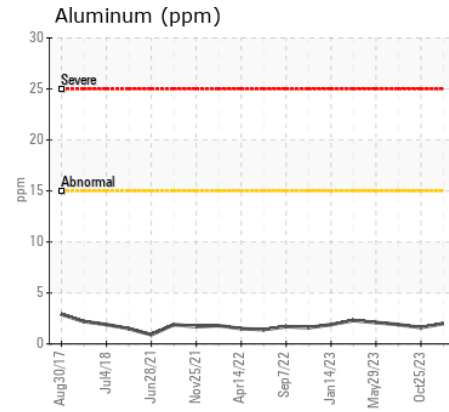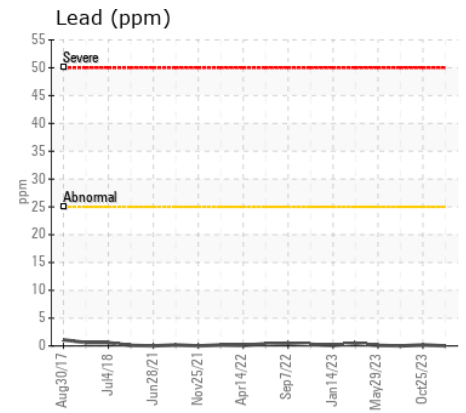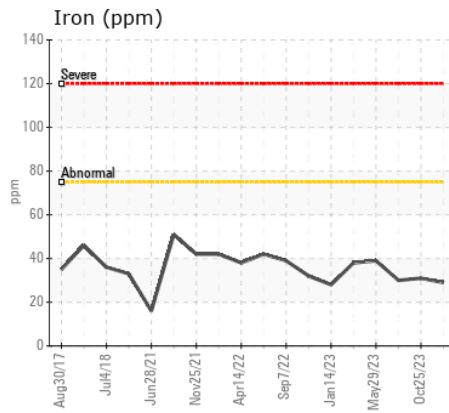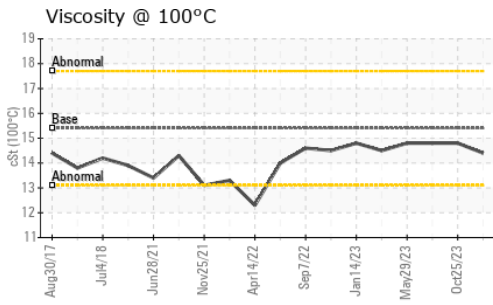

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 207 - Pickering SW**
Sample No. : GFL0102708 **Received** : 10 Jan 2024 **1034 TOY AVENUE, PICKERING YARD**
Lab Number : 02607669 **Diagnosed** : 10 Jan 2024 **PICKERING, ON**
Unique Number : 5708755 **Diagnostician** : Wes Davis **CA L1W 3P1**
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577