

Machine Id
SS0074
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W40 (13 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082682	PC0051599	---
Sample Date		Client Info		09 Jan 2024	25 Aug 2021	---
Machine Age	hrs	Client Info		1551	716	---
Oil Age	hrs	Client Info		500	0	---
Filter Age	hrs	Client Info		500	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	17	7	---
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	2	1	---
Lead	ppm	ASTM D5185(m)	>40	0	<1	---
Copper	ppm	ASTM D5185(m)	>330	5	13	---
Tin	ppm	ASTM D5185(m)	>15	<1	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	VLITE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	4	---
Potassium	ppm	ASTM D5185(m)	>20	1	1	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0.2	0	---
Nitration	Abs/cm	ASTM D7624*	>20	12.0	8.4	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.9	20.4	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	4	---
Boron	ppm	ASTM D5185(m)	65	31	48	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	65	53	57	---
Manganese	ppm	ASTM D5185(m)	0	0	<1	---
Magnesium	ppm	ASTM D5185(m)	1160	975	1153	---
Calcium	ppm	ASTM D5185(m)	820	741	820	---
Phosphorus	ppm	ASTM D5185(m)	1160	889	1081	---
Zinc	ppm	ASTM D5185(m)	1260	1073	1211	---
Sulfur	ppm	ASTM D5185(m)	3000	2643	2837	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.8	18.6	---
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	80.8	85.3	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	13.5	13.8	---
Viscosity Index (VI)	Scale	ASTM D2270*	169	170	166	---

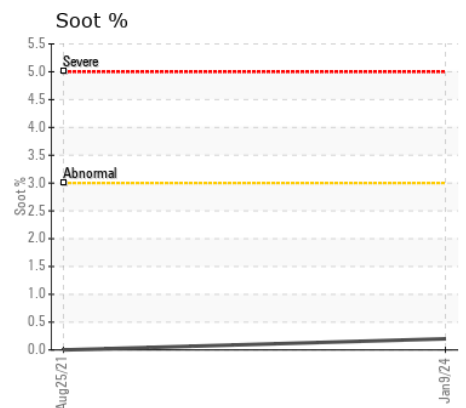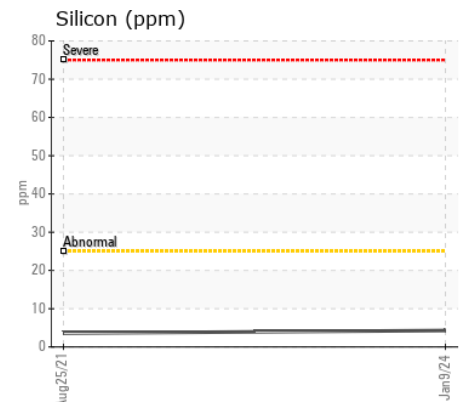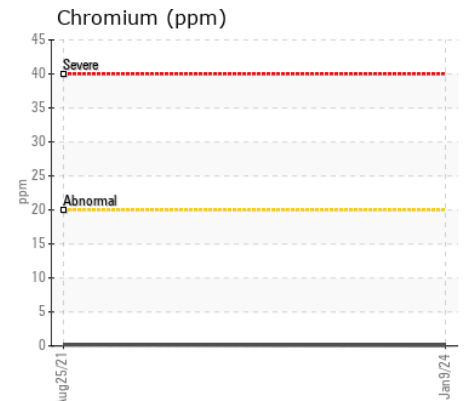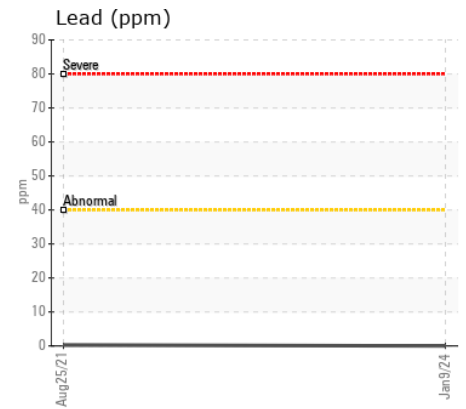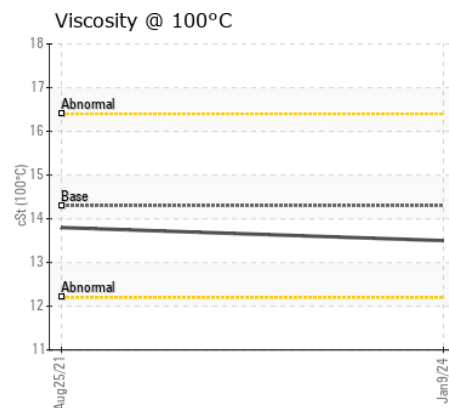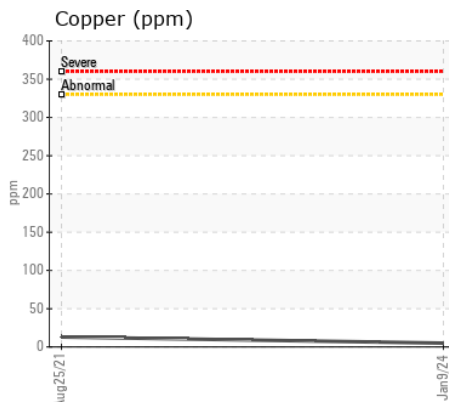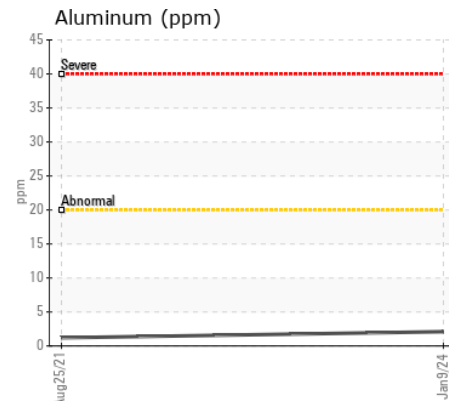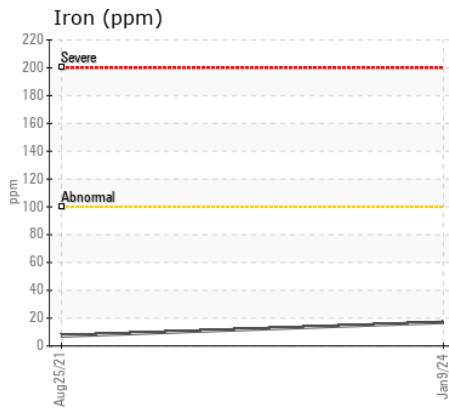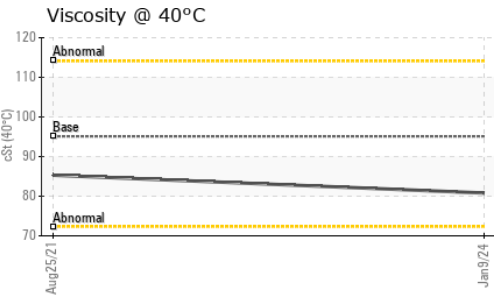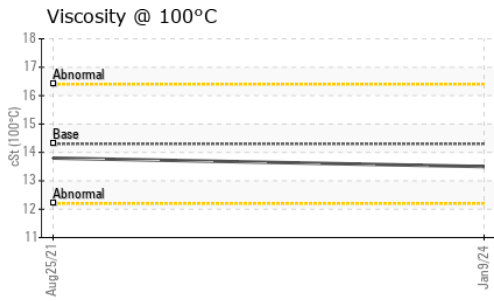

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations
Sample No. : PC0082682 **Received** : 10 Jan 2024 151 Ram Forest Rd,
Lab Number : 02607721 **Diagnosed** : 11 Jan 2024 Stouffville, ON
Unique Number : 5708807 **Diagnostician** : Wes Davis CA L4A 2G8
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual) Contact: Shannon Abbott
sabbott@gipi.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (905)750-5900
 F: