



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
International T195 (S/N 3HSDZAPR2KN655716)

Component
Diesel Engine

Fluid
INVENTORY EXPRESS 10W30 (44 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0852075	WC0806835	WC0758809
Sample Date		Client Info		05 Jan 2024	29 Jun 2023	22 Dec 2022
Machine Age	kms	Client Info		693704	630809	561476
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	31	21	31
Chromium	ppm	ASTM D5185(m)	>20	1	1	1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	5	5	7
Lead	ppm	ASTM D5185(m)	>40	8	3	6
Copper	ppm	ASTM D5185(m)	>330	1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	5	6
Potassium	ppm	ASTM D5185(m)	>20	5	5	7
Fuel		WC Method	>2.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.3	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	9.8	10.5	10.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	27.0	22.9	25.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	3
Boron	ppm	ASTM D5185(m)		10	18	14
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		80	80	90
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		322	62	43
Calcium	ppm	ASTM D5185(m)		1499	2116	2224
Phosphorus	ppm	ASTM D5185(m)		832	1005	1071
Zinc	ppm	ASTM D5185(m)		957	1130	1203
Sulfur	ppm	ASTM D5185(m)		2612	2775	3007
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.5	18.4	20.1
Visc @ 100°C	cSt	ASTM D7279(m)		9.8	11.0	11.2

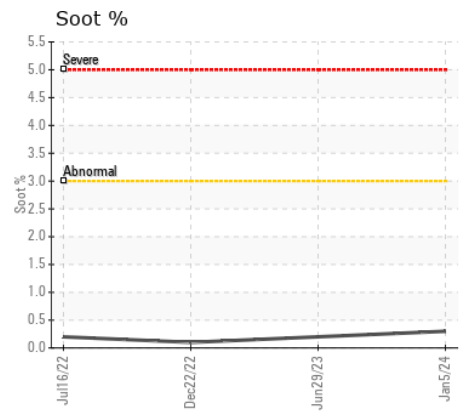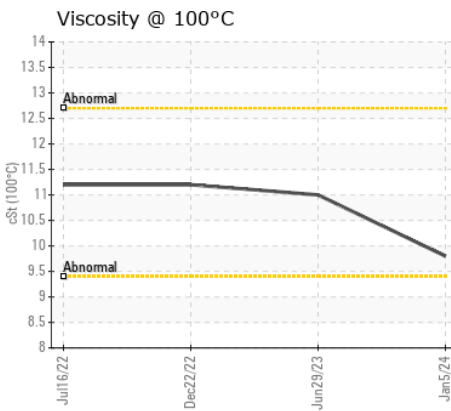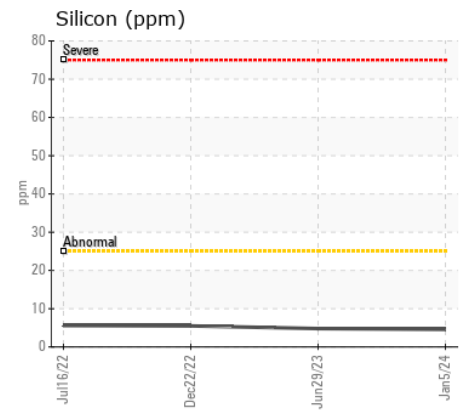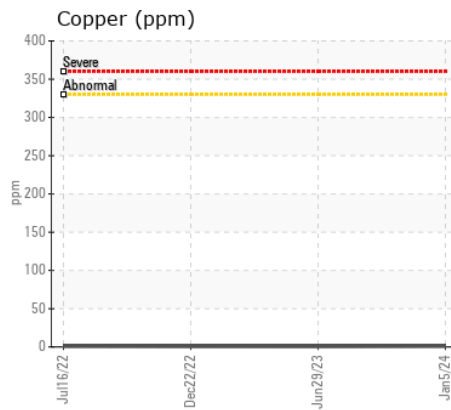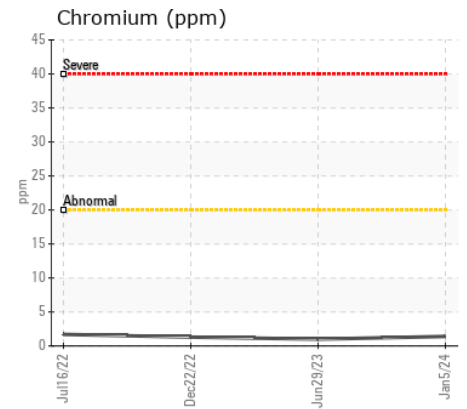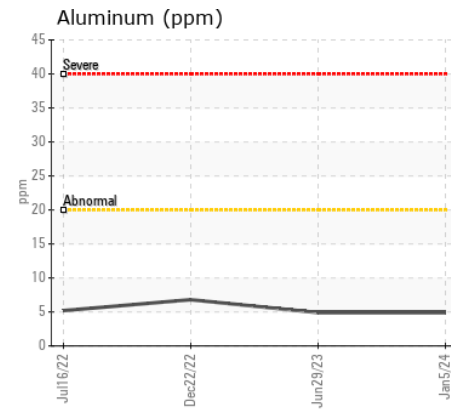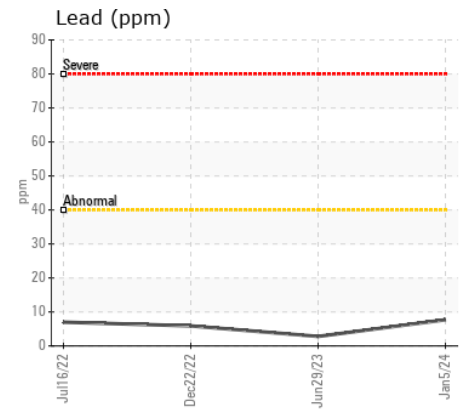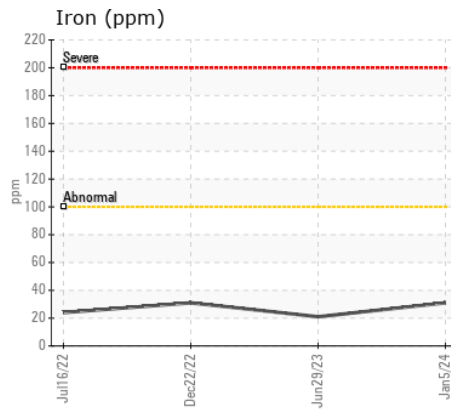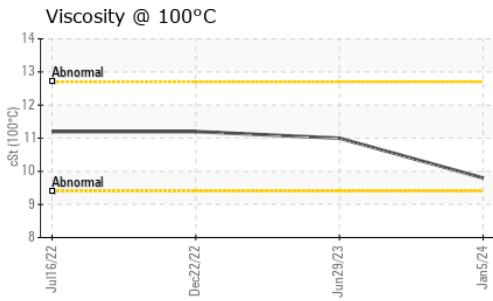

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0852075 **Received** : 10 Jan 2024
Lab Number : 02607753 **Diagnosed** : 10 Jan 2024
Unique Number : 5708839 **Diagnostician** : Wes Davis
Test Package : MOB 1

Zavcor Trucking Limited
 3650 Eagle Street
 Stevensville, ON
 CA L0S 1S0
 Contact: Jayesh Nanwani
 Jayeshn@zavcor.com
 T:
 F: (905)382-2555

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.