

Machine Id  
**7226**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

### RECOMMENDATION

Nous vous recommandons de vidanger le fluide de ce composant si vous ne l'avez pas déjà fait. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

### WEAR

Il y a indication d'usure du convertisseur de couple.












### CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

### FLUID CONDITION

le fluide n'est plus en état de service en raison d'une usure anormale et/ou sévère.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0082009</b>	PC0078100	PC0078127
Sample Date		Client Info		<b>08 Jan 2024</b>	03 Oct 2023	24 Jul 2023
Machine Age	kms	Client Info		<b>159230</b>	154432	1525910
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185(m)	>160	<b>151</b>	142	141
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>▲ 88</b>	▲ 72	▲ 73
Lead	ppm	ASTM D5185(m)	>50	<b>14</b>	12	13
Copper	ppm	ASTM D5185(m)	>225	<b>68</b>	61	66
Tin	ppm	ASTM D5185(m)	>10	<b>6</b>	6	6
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	<b>11</b>	11	11
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	5
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>11</b>	11	12
Boron	ppm	ASTM D5185(m)		<b>144</b>	133	143
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	<1	1
Calcium	ppm	ASTM D5185(m)		<b>117</b>	103	110
Phosphorus	ppm	ASTM D5185(m)		<b>389</b>	380	414
Zinc	ppm	ASTM D5185(m)		<b>11</b>	10	10
Sulfur	ppm	ASTM D5185(m)		<b>1715</b>	1492	1659
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>33.3</b>	33.8	33.3
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	<b>6.5</b>	6.7	6.6
Viscosity Index (VI)	Scale	ASTM D2270*	155	<b>152</b>	159	158

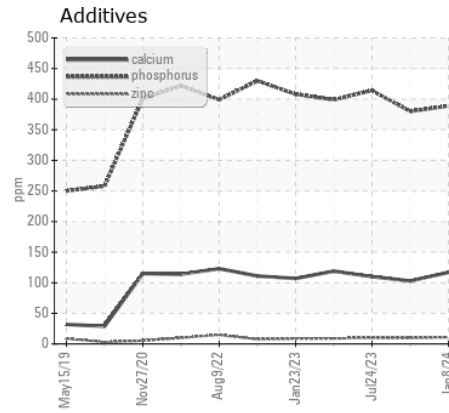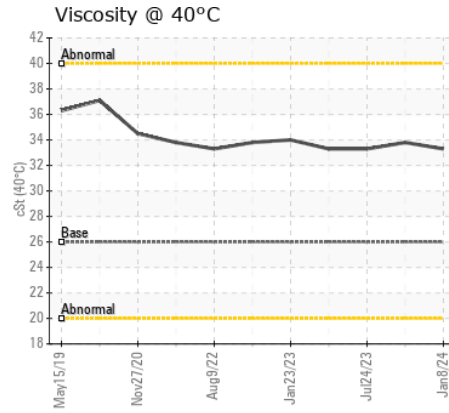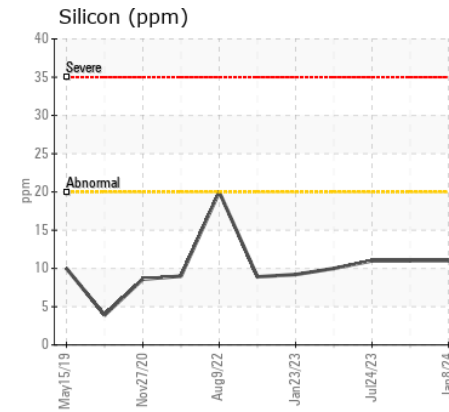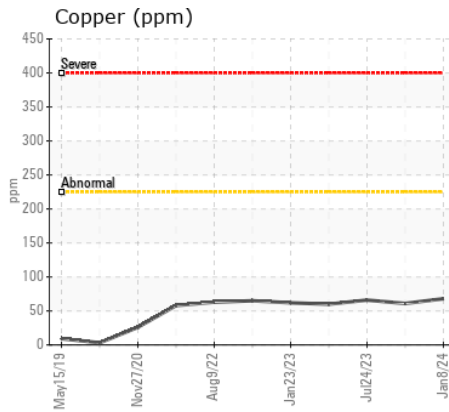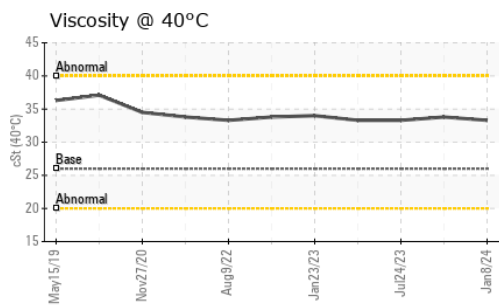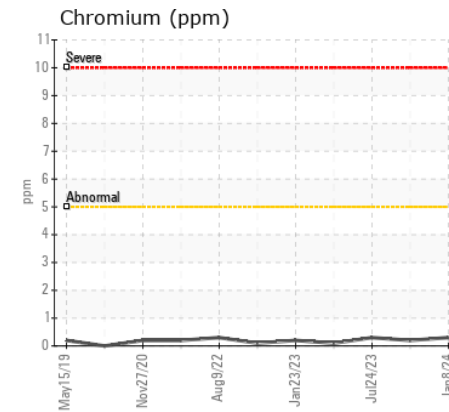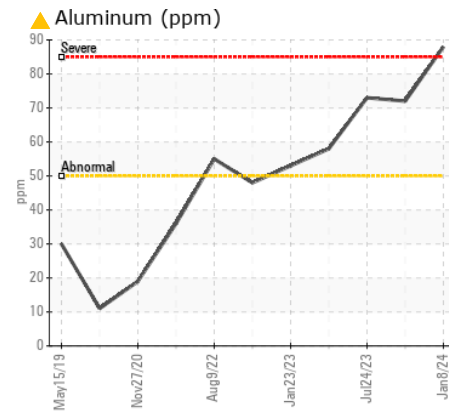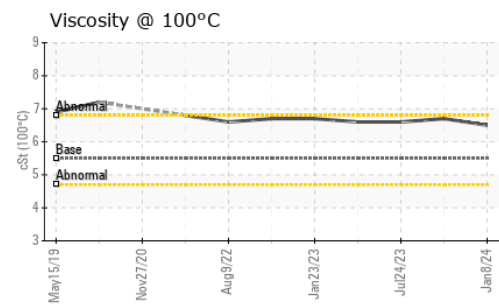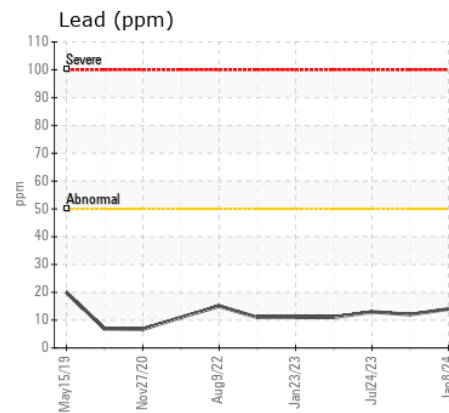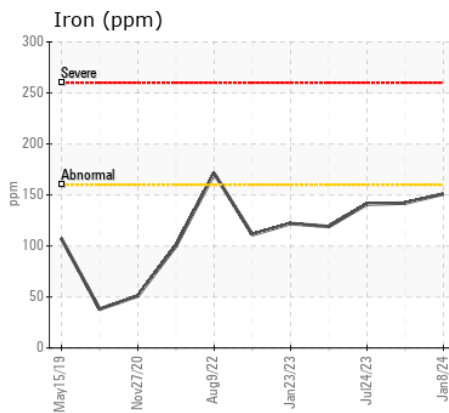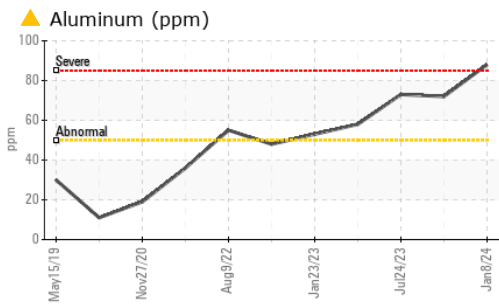

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 737 - Quebec City Hauling  
**Sample No.** : PC0082009 **Received** : 10 Jan 2024  
**Lab Number** : 02607895 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 5708981 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

6205 Boul. Wilfrid Hamel,  
 Quebec City, QC  
 CA G2E 5G8  
 Contact: Dave Beaulieu  
 davebeaulieu@matrec.ca  
 T:  
 F: