



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L566 054116-1484
Component
Rear Differential
Fluid
LIEBHERR GEAR BASIC 90 LS (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281154	LH0135642	LH0135640
Sample Date		Client Info		04 Jan 2024	21 Jan 2021	10 Dec 2020
Machine Age	hrs	Client Info		9598	4000	3800
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>1200	143	36	380
Chromium	ppm	ASTM D5185(m)	>20	1	<1	3
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	2
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>5	2	<1	2
Lead	ppm	ASTM D5185(m)	>4	<1	<1	4
Copper	ppm	ASTM D5185(m)	>40	11	17	▲ 124
Tin	ppm	ASTM D5185(m)	>4	<1	<1	▲ 6
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	2	2	25
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	LTMOD
Debris	scalar	Visual*	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	6
Boron	ppm	ASTM D5185(m)	0	13	200	4
Barium	ppm	ASTM D5185(m)	0	<1	<1	1
Molybdenum	ppm	ASTM D5185(m)	0	13	2	26
Manganese	ppm	ASTM D5185(m)	0	4	2	36
Magnesium	ppm	ASTM D5185(m)	<1	1	2	4
Calcium	ppm	ASTM D5185(m)	<1	8	17	10
Phosphorus	ppm	ASTM D5185(m)	2143	2277	2588	2235
Zinc	ppm	ASTM D5185(m)	<1	12	17	50
Sulfur	ppm	ASTM D5185(m)	23468	25876	20801	27805
Visc @ 40°C	cSt	ASTM D7279(m)	170	171	86.7	▲ 191

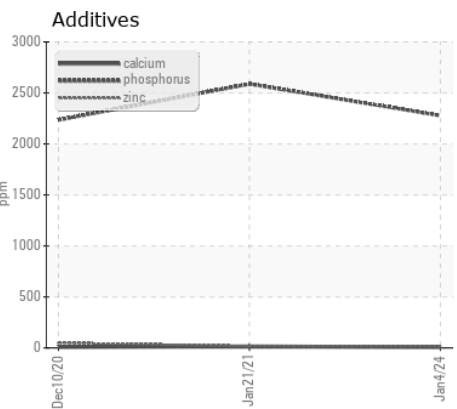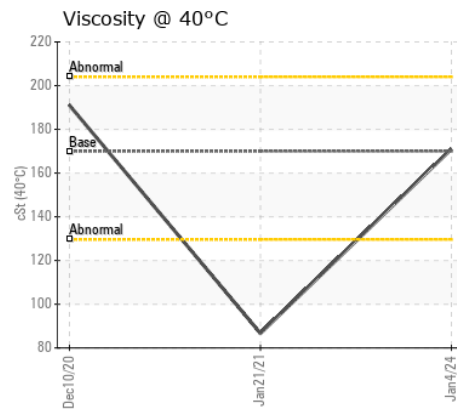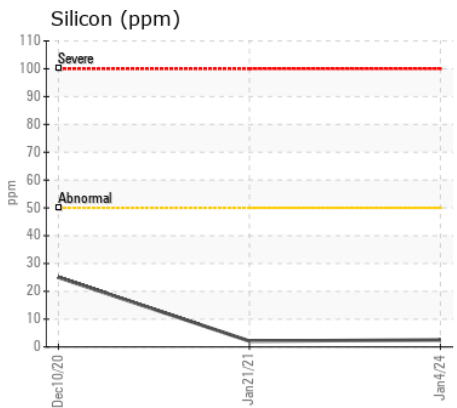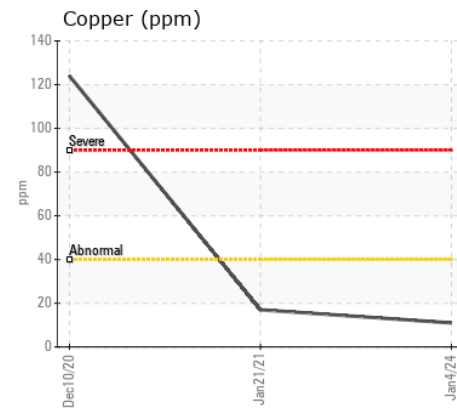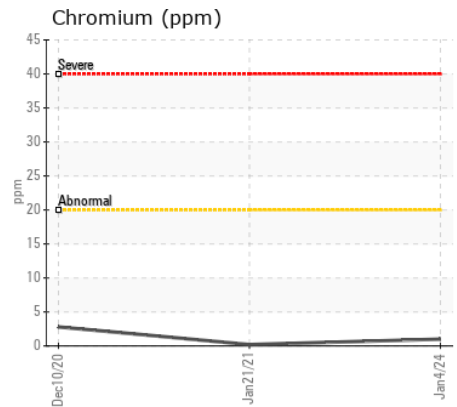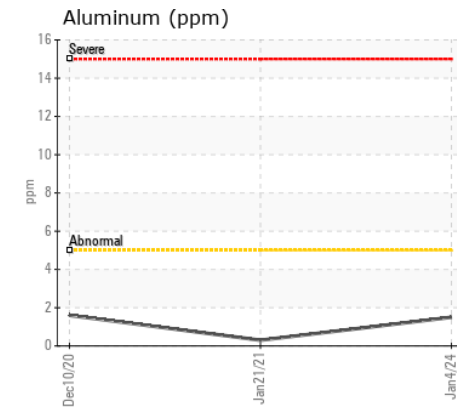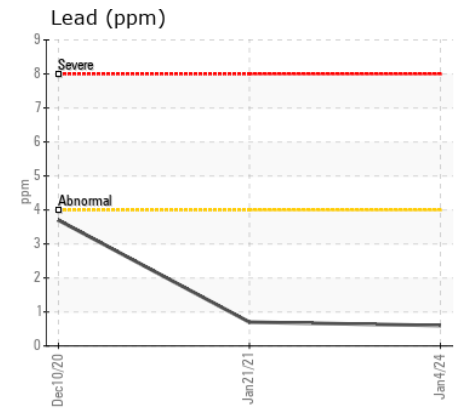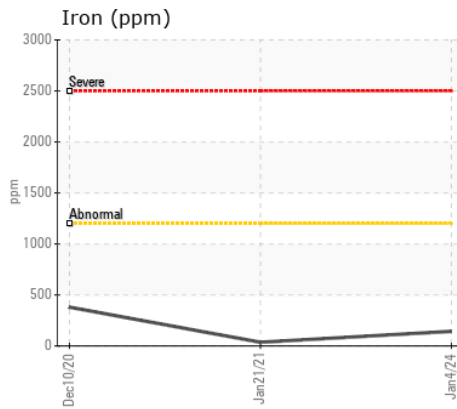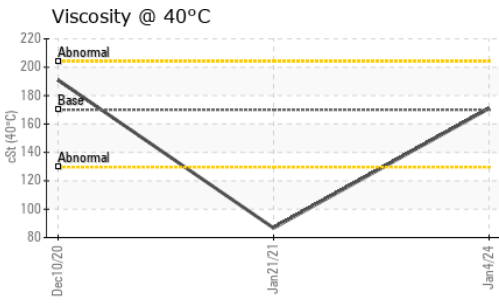

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0281154 **Received** : 10 Jan 2024
Lab Number : 02607949 **Diagnosed** : 10 Jan 2024
Unique Number : 5709035 **Diagnostician** : Wes Davis
Test Package : MOB 1

Abbycel Substrate Ltd.
 3545 Ross Road
 Abbotsford, BC
 CA V4X 1M6
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: