



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**LIEBHERR 883 NO UNIT LH0281136**

Component  
**Boom Hoist**

Fluid  
**CHEVRON DELO GEAR ESI OIL 80W90 (--- GAL)**

### RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281136	---	---
Sample Date		Client Info		25 Nov 2023	---	---
Machine Age	hrs	Client Info		1000	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>750	18	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	---	---
Lead	ppm	ASTM D5185(m)	>5	0	---	---
Copper	ppm	ASTM D5185(m)	>25	<1	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the component(unconfirmed).

Silicon	ppm	ASTM D5185(m)	>25	1	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

### FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	15	20	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<1	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	0	4	---	---
Calcium	ppm	ASTM D5185(m)	5	27	---	---
Phosphorus	ppm	ASTM D5185(m)	600	433	---	---
Zinc	ppm	ASTM D5185(m)	0	20	---	---
Sulfur	ppm	ASTM D5185(m)	22000	13905	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	140	167	---	---

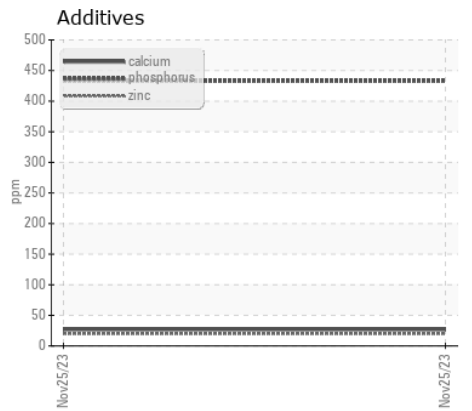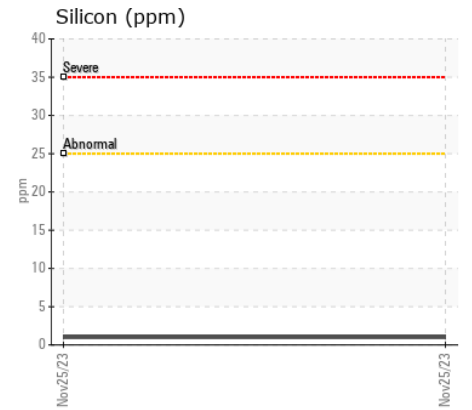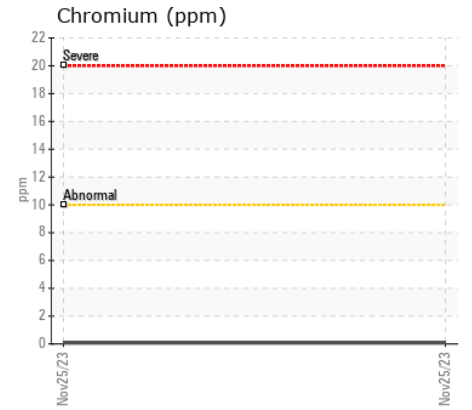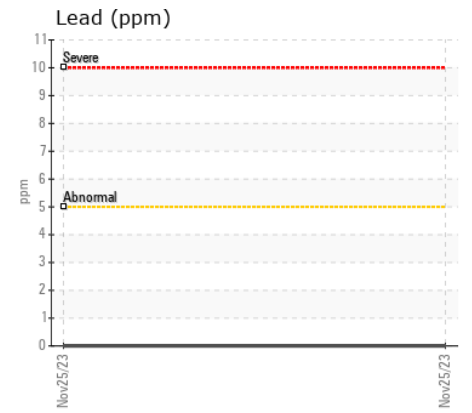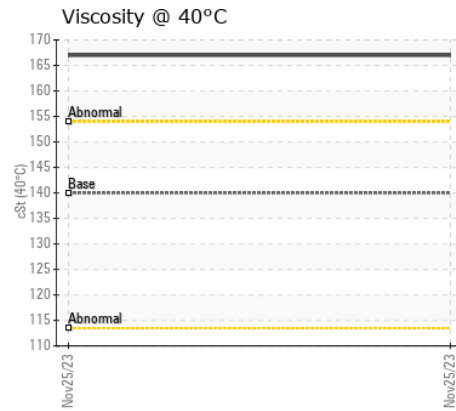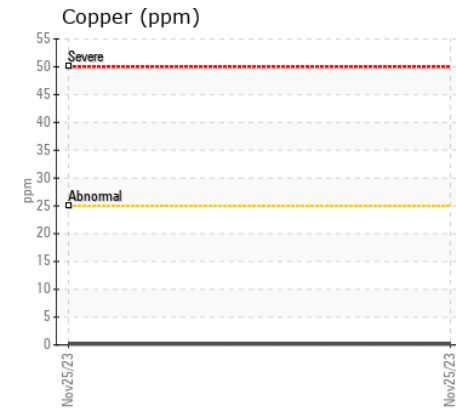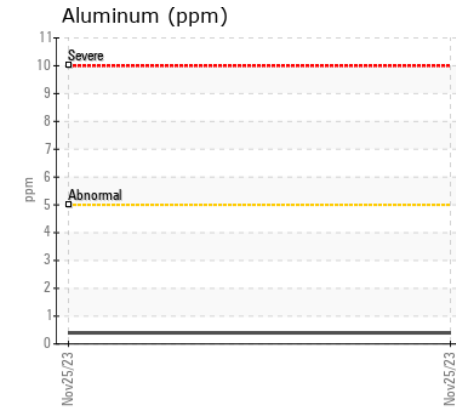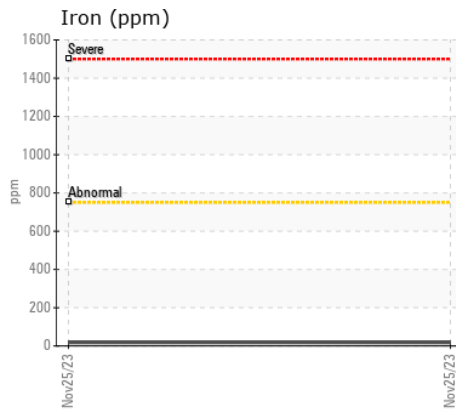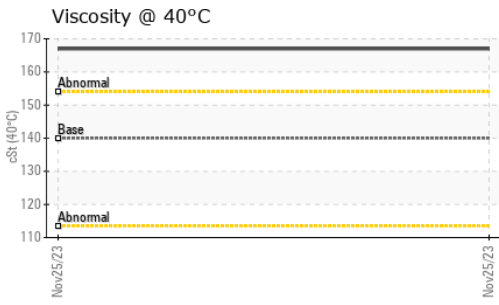

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0281136 **Received** : 10 Jan 2024  
**Lab Number** : 02607962 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 5709048 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: Bottom )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Fraser River Pile & Dredge**  
 1830 River Drive  
 New Westminister, BC  
 CA V3M 2A8  
 Contact: Nate Stafiej  
 nstafiej@frpd.com  
 T: (604)528-9355  
 F: (604)520-0943