



# OIL ANALYSIS REPORT

|               |               |
|---------------|---------------|
| WEAR          | <b>NORMAL</b> |
| CONTAMINANTS  | <b>NORMAL</b> |
| OIL CONDITION | <b>NORMAL</b> |




Machine Id  
**AH2112 - No.2 Main Engine**  
Component  
**Marine Diesel**  
Fluid  
**PETRO CANADA CM MHP 154 (1600 LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

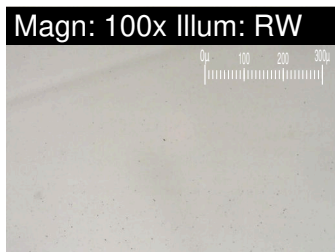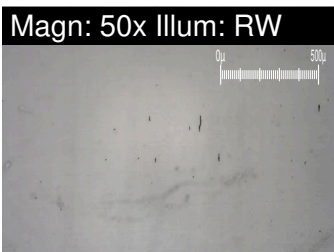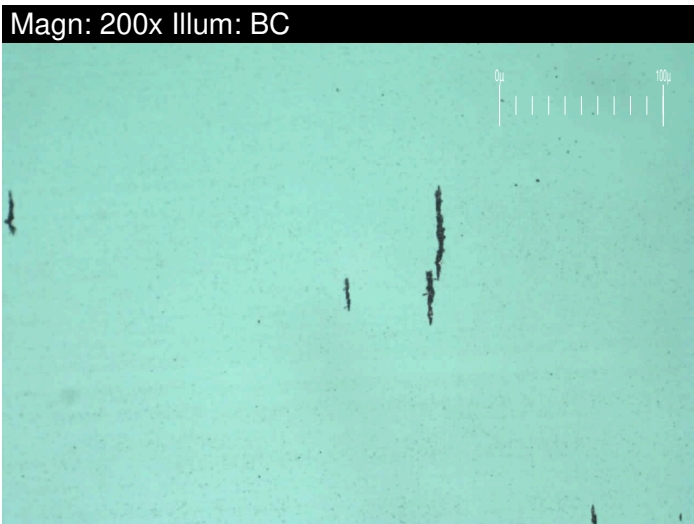

| Test                       | UOM        | Method        | Limit/Abn | Current            | History1    | History2    |
|----------------------------|------------|---------------|-----------|--------------------|-------------|-------------|
| Sample Number              |            | Client Info   |           | <b>WC0860191</b>   | WC0753467   | WC0740124   |
| Sample Date                |            | Client Info   |           | <b>04 Jan 2024</b> | 17 Sep 2023 | 17 Apr 2023 |
| Machine Age                | hrs        | Client Info   |           | <b>9715</b>        | 8754        | 7420        |
| Oil Age                    | hrs        | Client Info   |           | <b>0</b>           | 8754        | 7420        |
| Filter Age                 | hrs        | Client Info   |           | <b>0</b>           | 0           | 0           |
| Oil Changed                |            | Client Info   |           | <b>N/A</b>         | Not Chngd   | Not Chngd   |
| Filter Changed             |            | Client Info   |           | <b>N/A</b>         | Not Chngd   | Not Chngd   |
| Sample Status              |            |               |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |
| PQ                         |            | ASTM D8184*   |           | <b>0</b>           | 0           | 0           |
| Iron                       | ppm        | ASTM D5185(m) | >80       | <b>5</b>           | 6           | 6           |
| Chromium                   | ppm        | ASTM D5185(m) | >14       | <b>0</b>           | 0           | 0           |
| Nickel                     | ppm        | ASTM D5185(m) | >3        | <b>&lt;1</b>       | <1          | <1          |
| Titanium                   | ppm        | ASTM D5185(m) | >2        | <b>0</b>           | <1          | <1          |
| Silver                     | ppm        | ASTM D5185(m) | >2        | <b>0</b>           | <1          | 0           |
| Aluminum                   | ppm        | ASTM D5185(m) | >10       | <b>2</b>           | 2           | 2           |
| Lead                       | ppm        | ASTM D5185(m) | >11       | <b>0</b>           | 0           | 0           |
| Copper                     | ppm        | ASTM D5185(m) | >25       | <b>&lt;1</b>       | <1          | <1          |
| Tin                        | ppm        | ASTM D5185(m) | >2        | <b>0</b>           | 0           | 0           |
| Vanadium                   | ppm        | ASTM D5185(m) |           | <b>0</b>           | 0           | 0           |
| Large Particles            |            | DR-Ferr*      |           | <b>9.7</b>         | 4.0         | 7.1         |
| Small Particles            |            | DR-Ferr*      |           | <b>7.9</b>         | 3.1         | 4.2         |
| Total Particles            |            | DR-Ferr*      | >---      | <b>17.6</b>        | 7.1         | 11.3        |
| Large Particles Percentage | %          | DR-Ferr*      |           | <b>10.2</b>        | 12.7        | 25.7        |
| Severity Index             |            | DR-Ferr*      |           | <b>17</b>          | 4           | 21          |
| Ferrous Rubbing            | Scale 0-10 | ASTM D7684*   |           | <b>1</b>           | 2           | 2           |
| Ferrous Sliding            | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Ferrous Cutting            | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Ferrous Rolling            | Scale 0-10 | ASTM D7684*   |           | <b>1</b>           | 1           | 1           |
| Ferrous Break-in           | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Ferrous Spheres            | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Ferrous Black Oxides       | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Ferrous Red Oxides         | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Ferrous Corrosive          | Scale 0-10 | ASTM D7684*   |           |                    |             | 1           |
| Ferrous Other              | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Nonferrous Rubbing         | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Nonferrous Sliding         | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Nonferrous Cutting         | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Nonferrous Rolling         | Scale 0-10 | ASTM D7684*   |           |                    |             |             |
| Nonferrous Other           | Scale 0-10 | ASTM D7684*   |           |                    |             |             |

## CONTAMINANTS

There is no indication of any contamination in the oil.


|                       |            |               |      |                |      |      |
|-----------------------|------------|---------------|------|----------------|------|------|
| Silicon               | ppm        | ASTM D5185(m) | >25  | <b>9</b>       | 11   | 10   |
| Potassium             | ppm        | ASTM D5185(m) | >20  | <b>4</b>       | <1   | <1   |
| Fuel                  |            | WC Method     | >5   | <b>&lt;1.0</b> | <1.0 | <1.0 |
| Water                 |            | WC Method     | >0.1 | <b>NEG</b>     | NEG  | NEG  |
| Glycol                |            | WC Method     |      | <b>NEG</b>     | NEG  | NEG  |
| Soot %                | %          | ASTM D7844*   | >2   | <b>0</b>       | 0    | 0    |
| Nitration             | Abs/cm     | ASTM D7624*   | >20  | <b>9.4</b>     | 9.3  | 9.1  |
| Sulfation             | Abs/.1mm   | ASTM D7415*   | >30  | <b>14.5</b>    | 14.1 | 14.1 |
| Emulsified Water      | scalar     | Visual*       | >0.1 | <b>NEG</b>     | NEG  | NEG  |
| Carbonaceous Material | Scale 0-10 | ASTM D7684*   |      |                |      | 1    |
| Sand/Dirt             | Scale 0-10 | ASTM D7684*   |      | 1              | 1    | 1    |
| Fibres                | Scale 0-10 | ASTM D7684*   |      |                |      |      |
| Spheres               | Scale 0-10 | ASTM D7684*   |      |                |      |      |
| Other                 | Scale 0-10 | ASTM D7684*   |      | 1              | 1    | 1    |

## OIL CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                       |            |               |       |              |       |       |
|-----------------------|------------|---------------|-------|--------------|-------|-------|
| Sodium                | ppm        | ASTM D5185(m) | >40   | <b>2</b>     | 3     | 8     |
| Boron                 | ppm        | ASTM D5185(m) |       | <b>3</b>     | 3     | 4     |
| Barium                | ppm        | ASTM D5185(m) |       | <b>0</b>     | 0     | 0     |
| Molybdenum            | ppm        | ASTM D5185(m) |       | <b>1</b>     | 1     | 1     |
| Manganese             | ppm        | ASTM D5185(m) |       | <b>0</b>     | <1    | <1    |
| Magnesium             | ppm        | ASTM D5185(m) |       | <b>33</b>    | 37    | 34    |
| Calcium               | ppm        | ASTM D5185(m) |       | <b>5206</b>  | 5263  | 5437  |
| Phosphorus            | ppm        | ASTM D5185(m) |       | <b>881</b>   | 957   | 963   |
| Zinc                  | ppm        | ASTM D5185(m) | 1098  | <b>948</b>   | 996   | 988   |
| Sulfur                | ppm        | ASTM D5185(m) |       | <b>9798</b>  | 9892  | 9731  |
| Oxidation             | Abs/.1mm   | ASTM D7414*   | >25   | <b>7.7</b>   | 7.5   | 7.5   |
| Base Number (BN)      | mg KOH/g   | ASTM D2896*   | 15.99 | <b>14.82</b> | 14.98 | 15.23 |
| Visc @ 100°C          | cSt        | ASTM D7279(m) | 13.51 | <b>12.7</b>  | 12.7  | 12.7  |
| Lubricant Degradation | Scale 0-10 | ASTM D7684*   |       |              |       |       |


### Ferrous Alloys

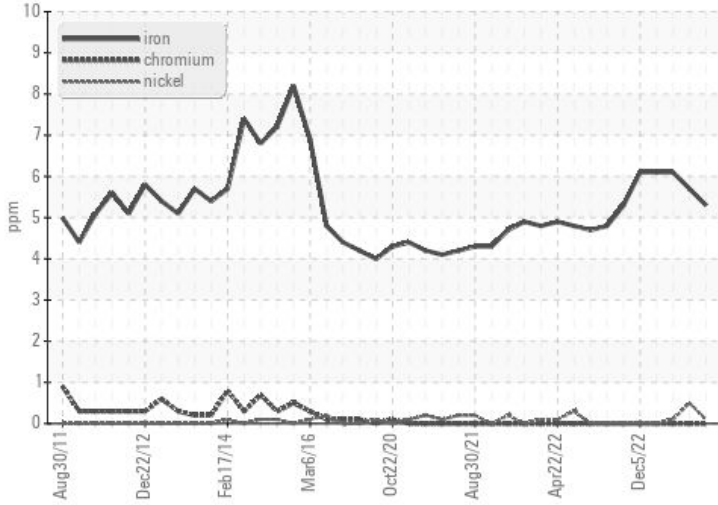


### Non-ferrous Metals

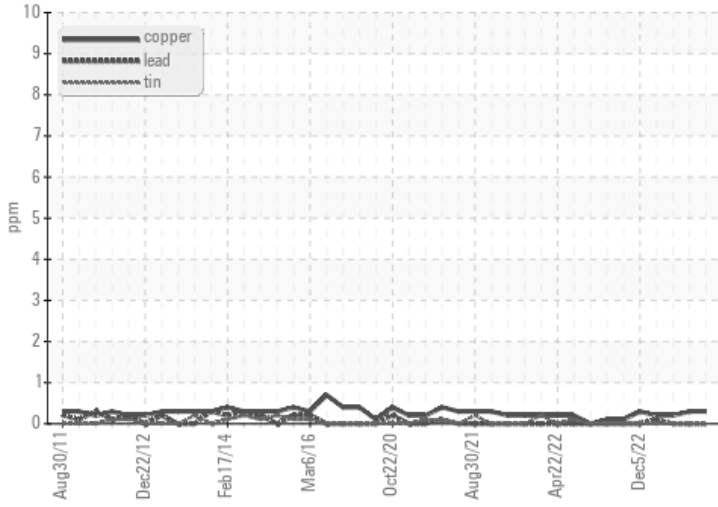


### Viscosity @ 100°C

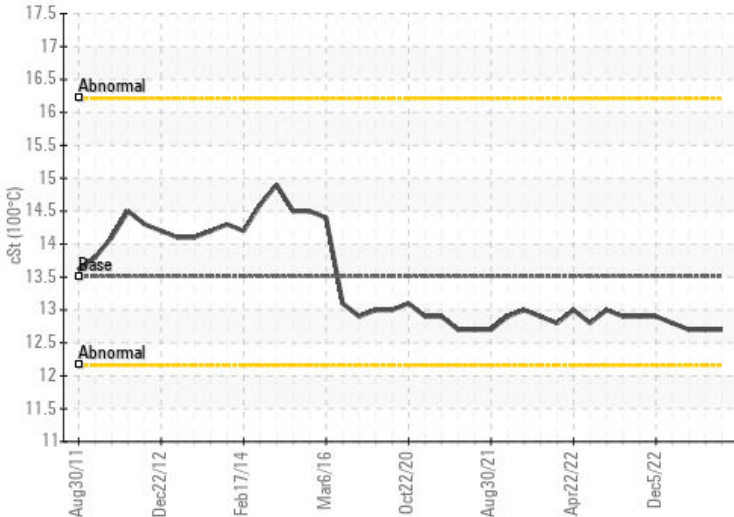

### PQ

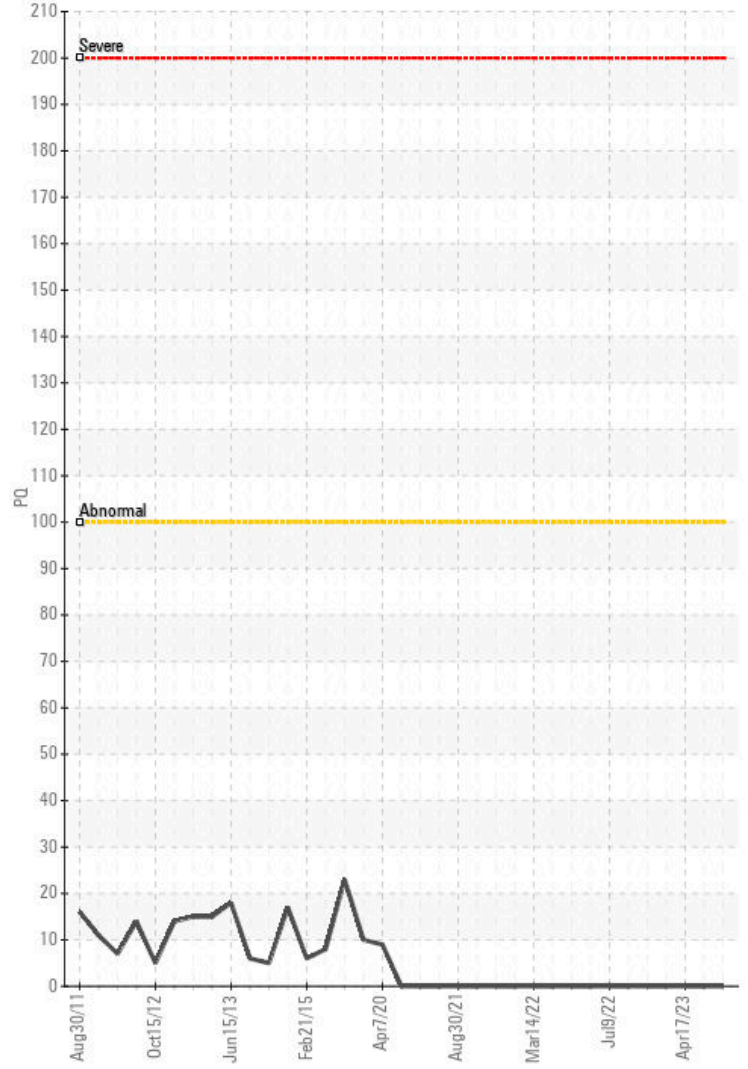

### Base Number

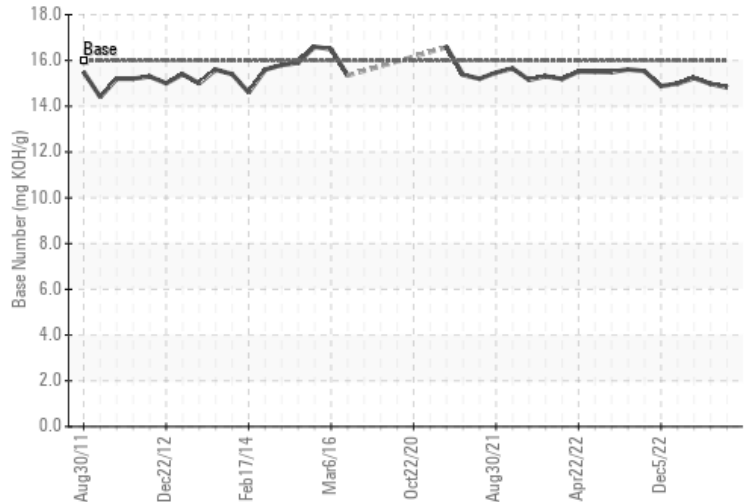

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0860191  
**Lab Number** : 02608084  
**Unique Number** : 5709170  
**Test Package** : MAR 3

**CANADIAN COAST GUARD/DFO**  
 CCGS ANN HARVEY, P.O. BOX 5667  
 ST. JOHN'S, NL  
 CA A1C 5X1  
 Contact: Chief Engineer  
 annharveyce@ccgs-ngcc.gc.ca  
 T:  
 F: (709)772-3652

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

*This page left intentionally blank*