



WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
424008
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0082183	---	---
Sample Date		Client Info		30 Dec 2023	---	---
Machine Age	hrs	Client Info		37242	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				MARGINAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	1	---	---
Copper	ppm	ASTM D5185(m)	>330	3	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Fuel	%	ASTM D7593*	>5	▲ 2.6	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.3	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.4	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	1	---	---
Boron	ppm	ASTM D5185(m)	250	5	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	53	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	777	---	---
Calcium	ppm	ASTM D5185(m)	3000	999	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	908	---	---
Zinc	ppm	ASTM D5185(m)	1350	1049	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2424	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.7	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	12.1	---	---

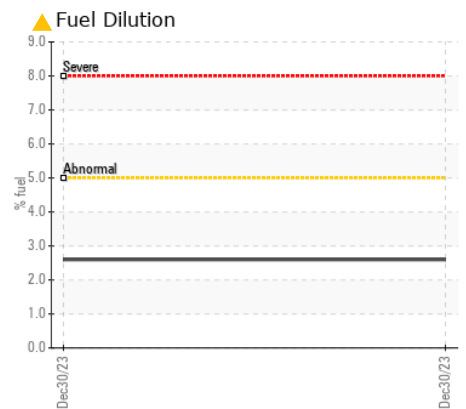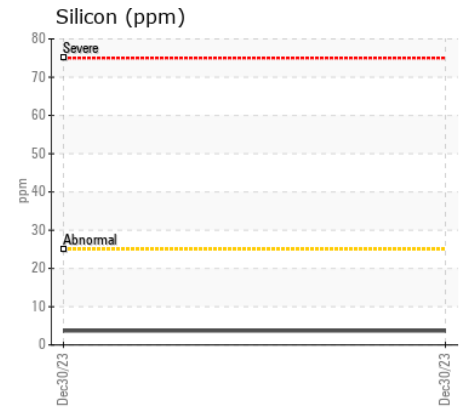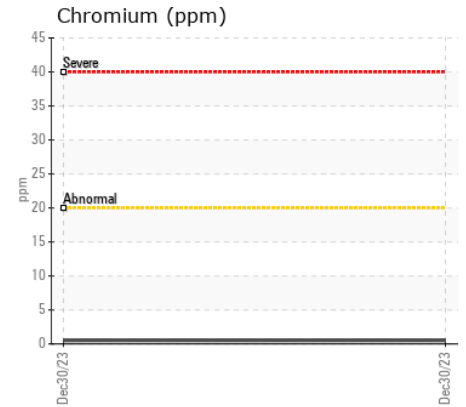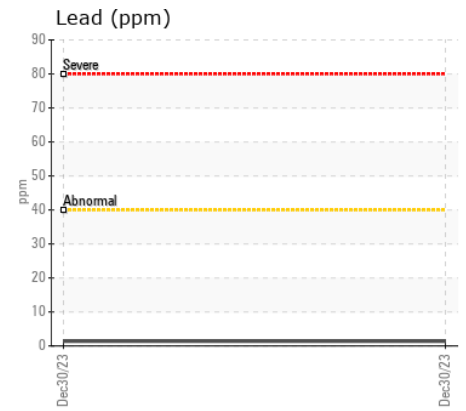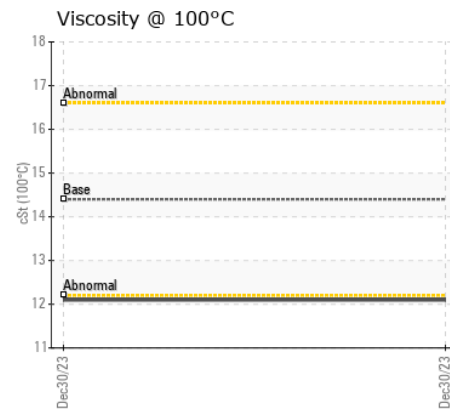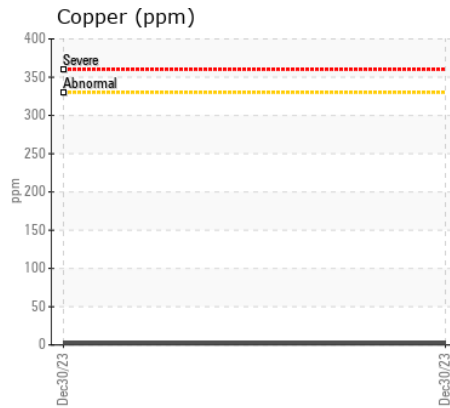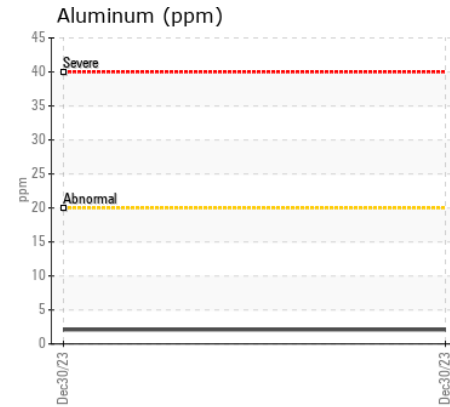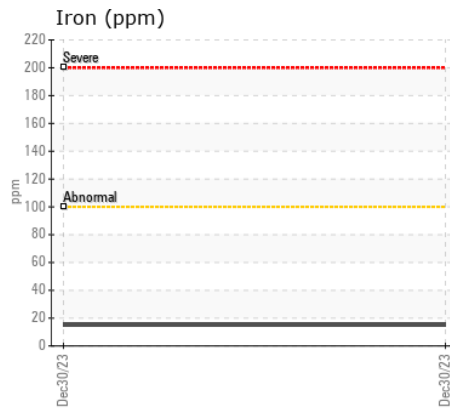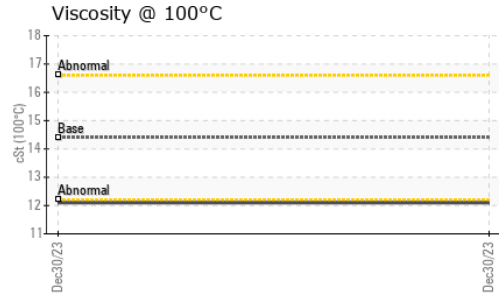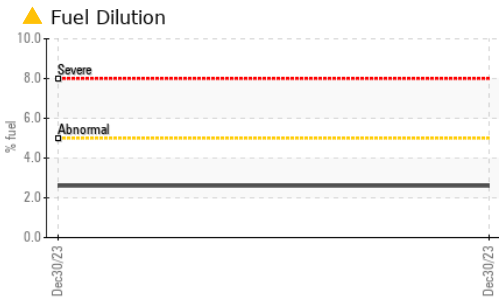

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0082183 **Received** : 11 Jan 2024
Lab Number : 02608100 **Diagnosed** : 12 Jan 2024
Unique Number : 5709186 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: FUELDILUTION, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 593
 4421 Boban Drive
 Nanaimo, BC
 CA V9T 6A6
 Contact: Patrick Rutti
 prutti@gflenv.com
 T: (250)739-3345
 F: