



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
AH8126 - Deck Tugger Winch Hyd.
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 32 (310 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0860187	WC0855665	WC0740120
Sample Date		Client Info		12 Dec 2023	16 Sep 2023	14 Oct 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	3	3	2
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	0
Lead	ppm	ASTM D5185(m)	>20	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>20	9	10	10
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	<1	<1	0
Potassium	ppm	ASTM D5185(m)	>20	4	0	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647		8959	22577	8322
Particles >6µm		ASTM D7647	>5000	290	3310	1034
Particles >14µm		ASTM D7647	>640	10	134	84
Particles >21µm		ASTM D7647	>160	3	28	20
Particles >38µm		ASTM D7647	>40	1	1	0
Particles >71µm		ASTM D7647	>10	1	0	0
Oil Cleanliness		ISO 4406 (c)	>-/19/16	20/15/10	22/19/14	20/17/14
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	1	<1	<1
Calcium	ppm	ASTM D5185(m)	50	54	57	55
Phosphorus	ppm	ASTM D5185(m)	330	328	369	352
Zinc	ppm	ASTM D5185(m)	430	401	433	▲ 405
Sulfur	ppm	ASTM D5185(m)	760	907	809	823
Acid Number (AN)	mg KOH/g	ASTM D974*	0.50	0.30	0.39	0.30
Visc @ 40°C	cSt	ASTM D7279(m)	31.5	30.1	30.4	▲ 31.2

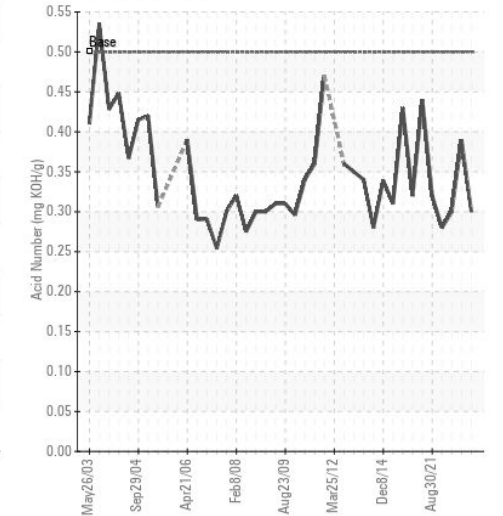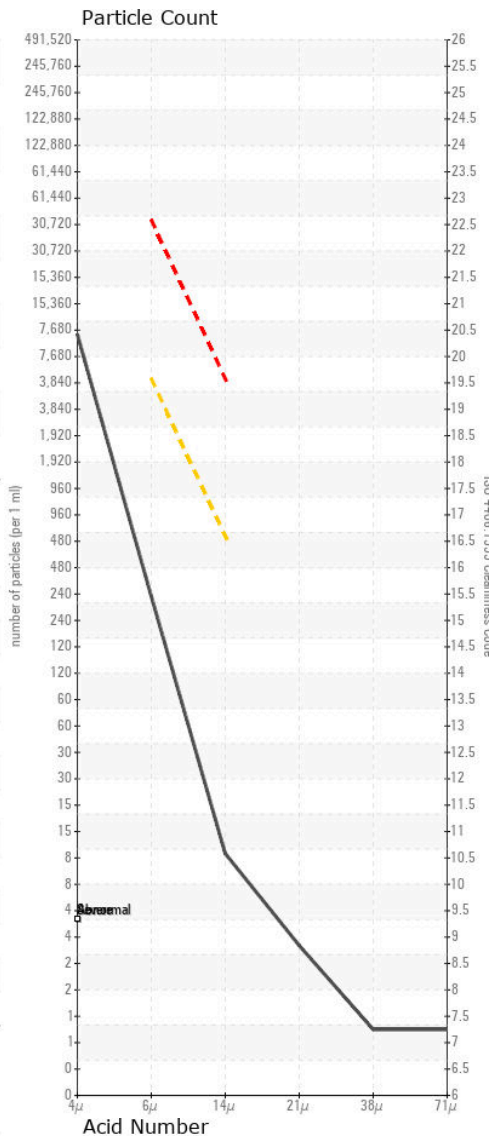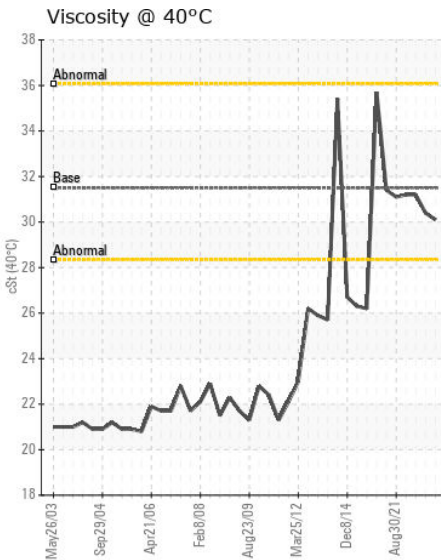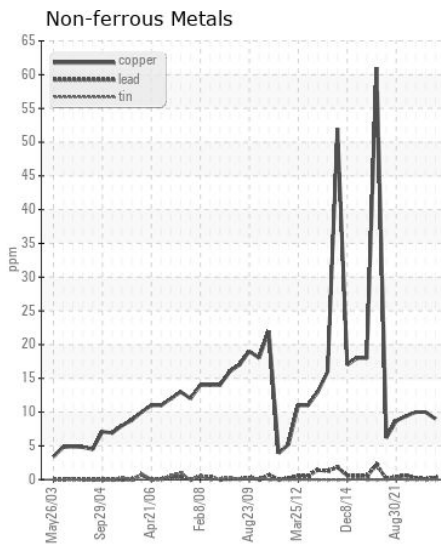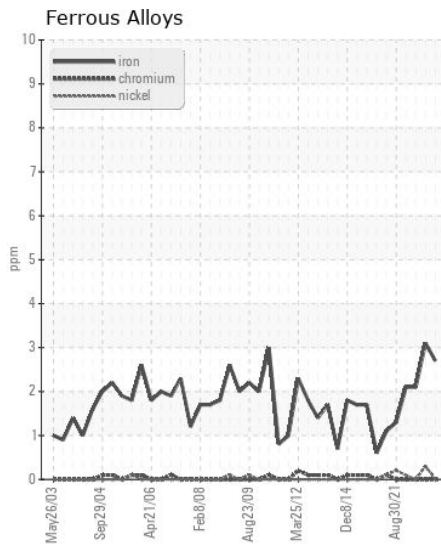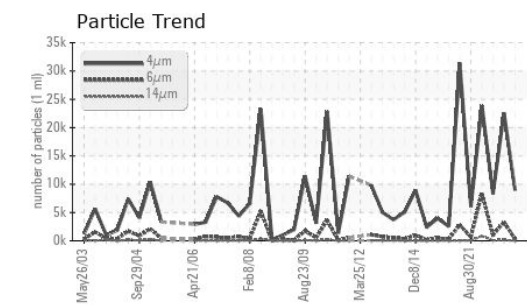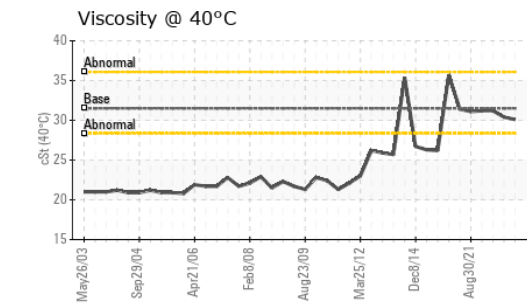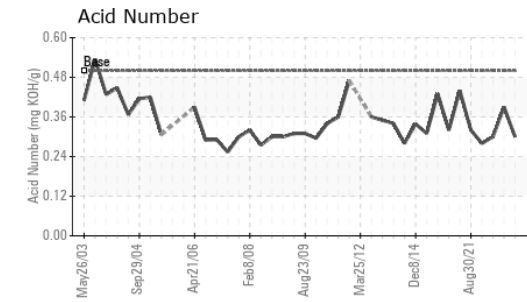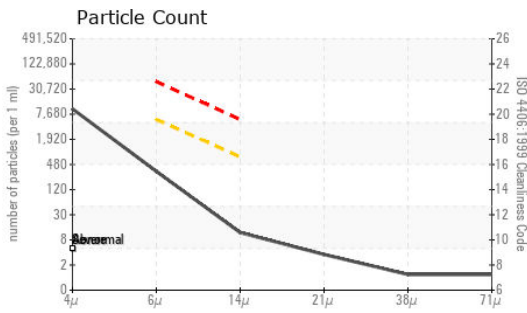

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0860187
Lab Number : 02608168
Unique Number : 5709254
Test Package : MAR 2

CANADIAN COAST GUARD/DFO
 CCGS ANN HARVEY, P.O. BOX 5667
 ST. JOHN'S, NL
 CA A1C 5X1
 Contact: Chief Engineer
 annharveyce@ccgs-ngcc.gc.ca
 T:
 F: (709)772-3652

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.