



POWER SYSTEMS
SYSTÈMES DE PUISSANCE

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area
[6100228100]
Machine Id
3110121407
Component
Transmission
Fluid
SAE 15W40 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

WEAR

Les taux d'usure de tous les composants sont normaux.












CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

La viscosité de le fluide est inférieure à la viscosité type, ce qui pourrait indiquer l'ajout d'un grade d'huile plus léger. Le AN est acceptable pour ce fluide. L'état de le fluide permet d'en prolonger l'utilisation.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WA0021070	---	---
Sample Date		Client Info		08 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184*	>130	0	---	---
Iron	ppm	ASTM D5185(m)	>250	8	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)		7	---	---
Aluminum	ppm	ASTM D5185(m)	>55	2	---	---
Lead	ppm	ASTM D5185(m)	>65	4	---	---
Copper	ppm	ASTM D5185(m)	>230	168	---	---
Tin	ppm	ASTM D5185(m)	>6	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>15	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	5	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>57	2	---	---
Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		10	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		168	---	---
Calcium	ppm	ASTM D5185(m)		2602	---	---
Phosphorus	ppm	ASTM D5185(m)		1021	---	---
Zinc	ppm	ASTM D5185(m)		1076	---	---
Sulfur	ppm	ASTM D5185(m)		4122	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		1.89	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	115	▲ 54.5	---	---

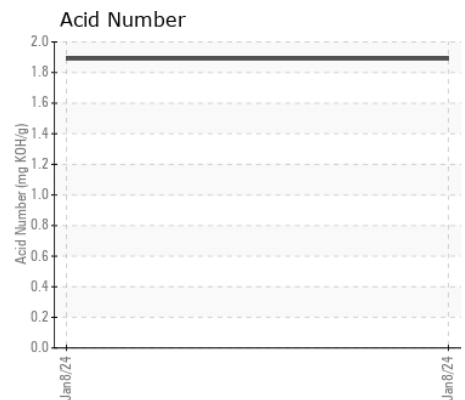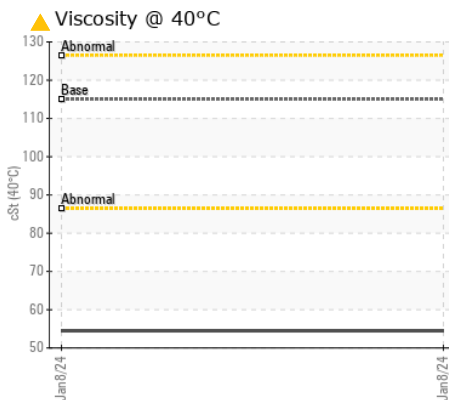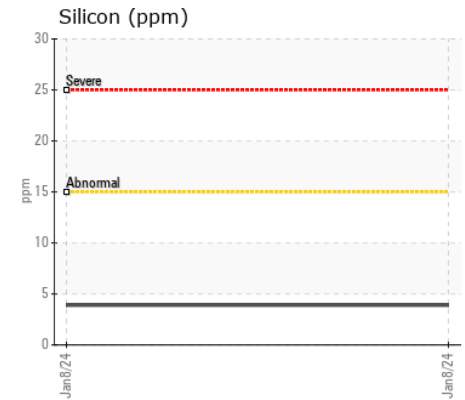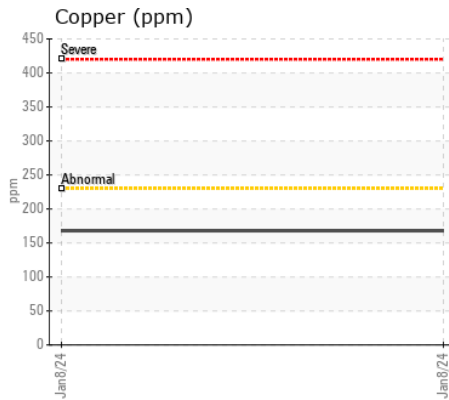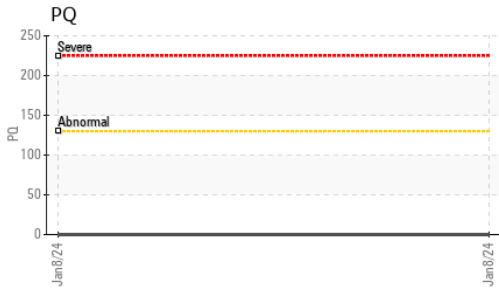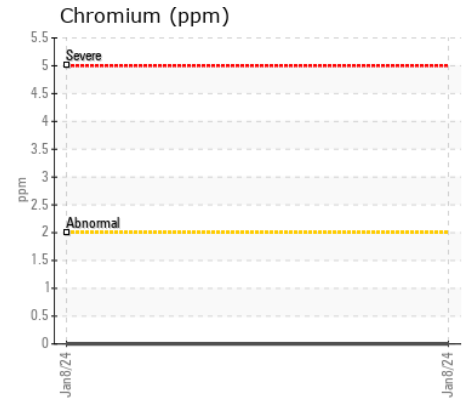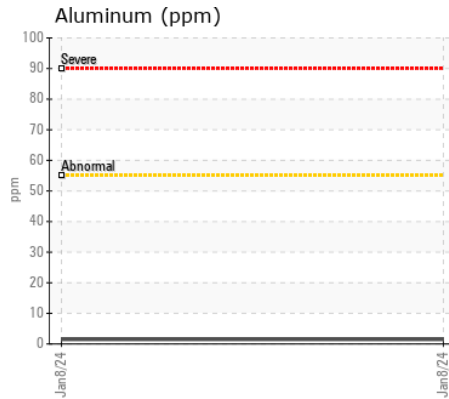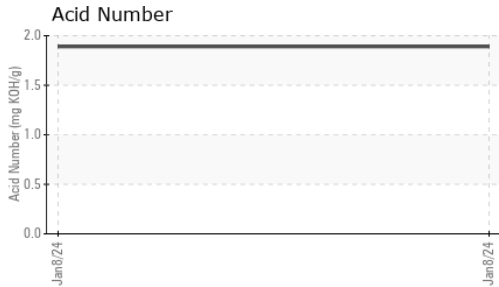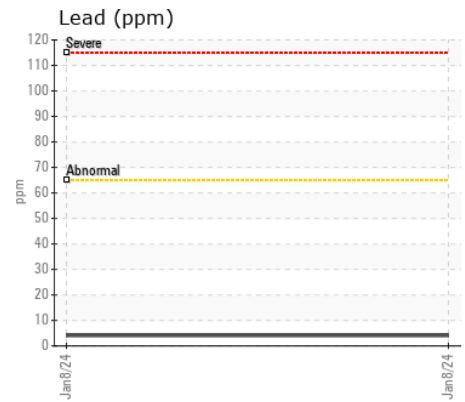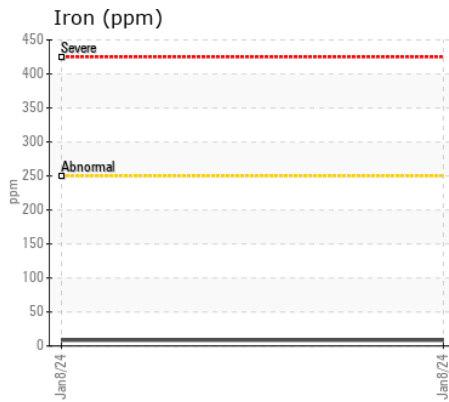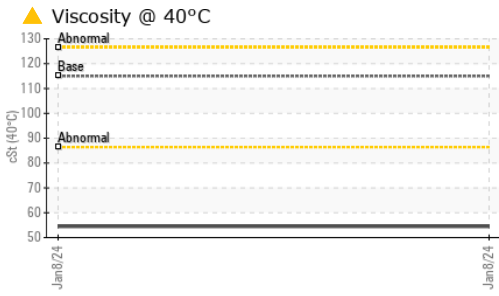

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA021070 **Received** : 11 Jan 2024
Lab Number : 02608243 **Diagnosed** : 16 Jan 2024
Unique Number : 5709329 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: PQ)

Wajax Power Systems
 1080 Rue Jules-Brisebois
 Val D'Or, QC
 CA J9P 6X4
 Contact: Luc Laflamme
 llaflamme@wajax.com
 T: (819)874-2552
 F: (819)874-8995

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.