



POWER SYSTEMS
SYSTÈMES DE PUISSANCE

OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	SEVERE
FLUID CONDITION	ATTENTION

Area
[6100248694]
Machine Id
6610145801
Component
Transmission
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Nous vous recommandons de vérifier la source de la fuite de fluide de refroidissement. Nous vous recommandons de vidanger le fluide de ce composant si vous ne l'avez pas déjà fait. Nous vous recommandons de rincer complètement le composant avant de le remplir le fluide. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

WEAR

Usure des engrenages. Le bas indice ferreux (PQ) indique que l'usure ferreuse est due à de la corrosion.














CONTAMINATION

Le test de glycol est positif. Concentration élevée de glycol dans le fluide.

FLUID CONDITION

Le AN est acceptable pour ce fluide. le fluide n'est plus en état de service en raison d'une usure anormale et/ou sévère.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WA0019947	---	---
Sample Date		Client Info		10 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184*	>130	22	---	---
Iron	ppm	ASTM D5185(m)	>250	1258	---	---
Chromium	ppm	ASTM D5185(m)	>2	2	---	---
Nickel	ppm	ASTM D5185(m)	>2	1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>55	29	---	---
Lead	ppm	ASTM D5185(m)	>65	46	---	---
Copper	ppm	ASTM D5185(m)	>230	29	---	---
Tin	ppm	ASTM D5185(m)	>6	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>15	31	---	---
Potassium	ppm	ASTM D5185(m)	>20	71	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol	%	ASTM D7922*		0.437	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		47	---	---
Boron	ppm	ASTM D5185(m)		37	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		3	---	---
Manganese	ppm	ASTM D5185(m)		5	---	---
Magnesium	ppm	ASTM D5185(m)		7	---	---
Calcium	ppm	ASTM D5185(m)		27	---	---
Phosphorus	ppm	ASTM D5185(m)		210	---	---
Zinc	ppm	ASTM D5185(m)		96	---	---
Sulfur	ppm	ASTM D5185(m)		1197	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.69	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		41.8	---	---

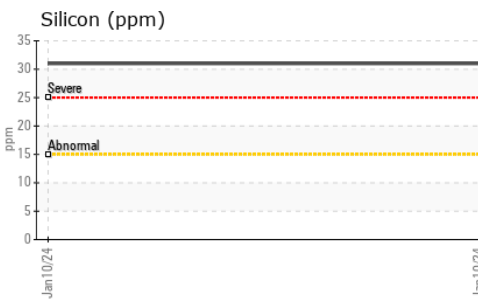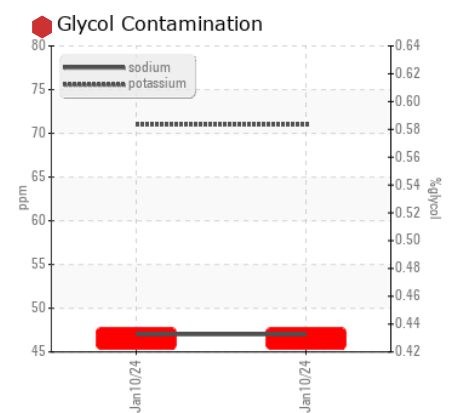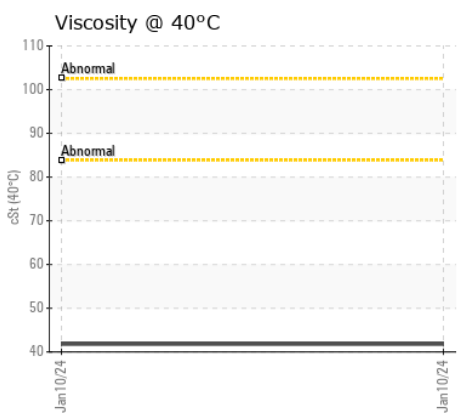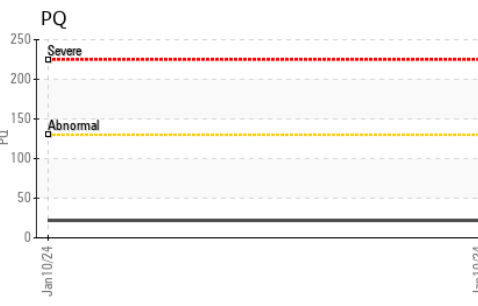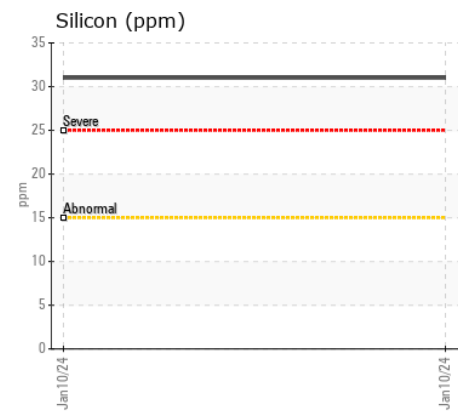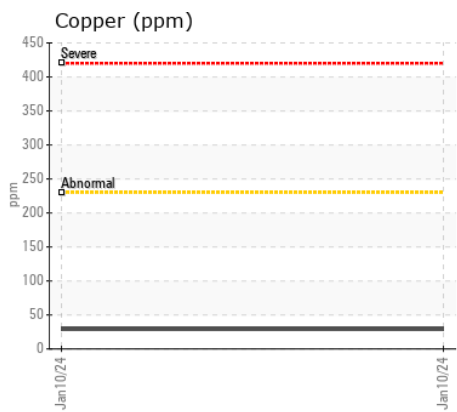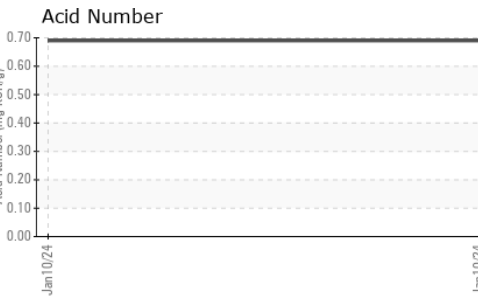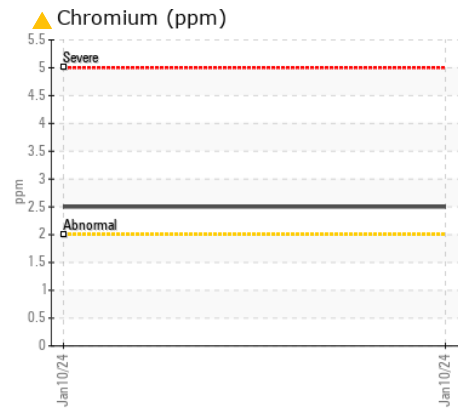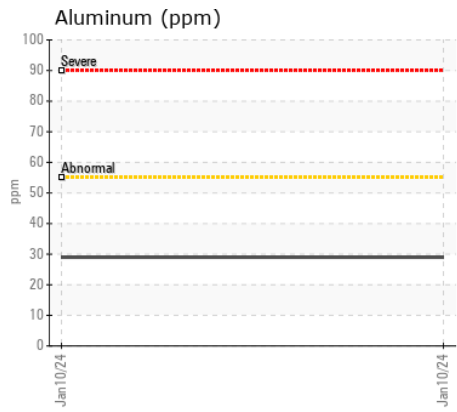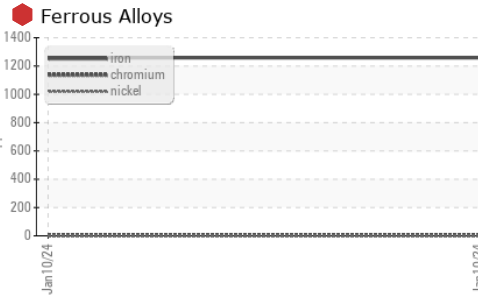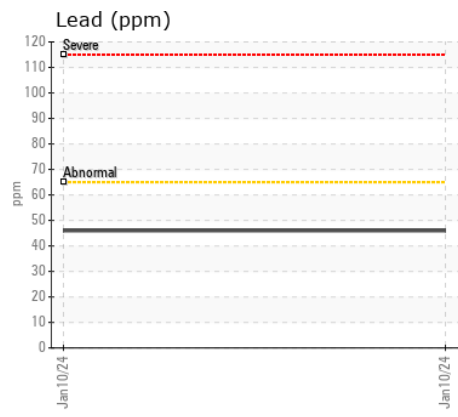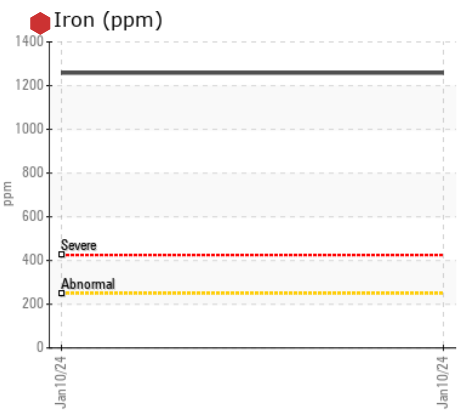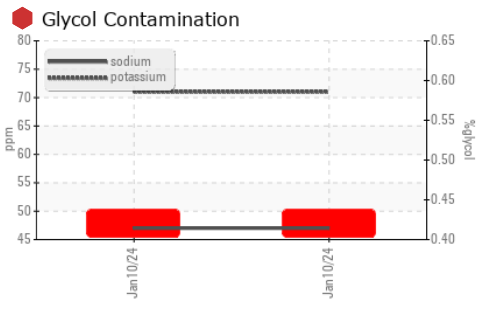

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0019947 **Received** : 11 Jan 2024
Lab Number : 02608246 **Diagnosed** : 16 Jan 2024
Unique Number : 5709332 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: Glycol, PQ)

Wajax Power Systems
 2997 AV. WATT
 Quebec, QC
 CA G1X 3W1
 Contact: Steve Racine
 sracine@wajax.com
 T:
 F: (418)651-4448

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.