



Machine Id
CATERPILLAR CC34 2101103
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0072500	---	---
Sample Date		Client Info		03 Jan 2024	---	---
Machine Age	kms	Client Info		4460	---	---
Oil Age	kms	Client Info		500	---	---
Filter Age	kms	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	6	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	3	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION













Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Fuel	%	ASTM D7593*	>5	1	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.3	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	3	---	---
Boron	ppm	ASTM D5185(m)	250	57	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	40	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	502	---	---
Calcium	ppm	ASTM D5185(m)	3000	1742	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	743	---	---
Zinc	ppm	ASTM D5185(m)	1350	841	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2157	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.1	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	115	93.7	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	12.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	131	---	---

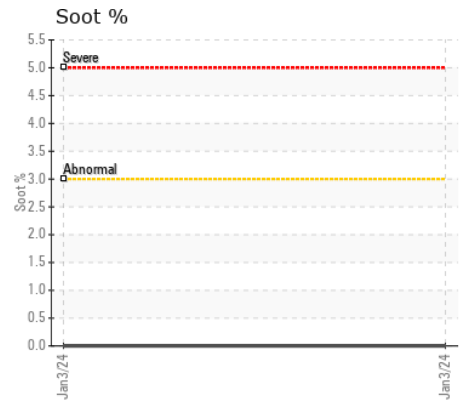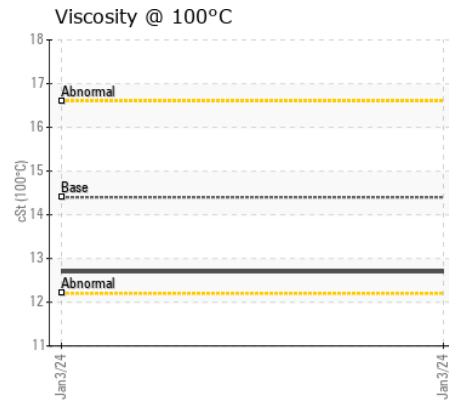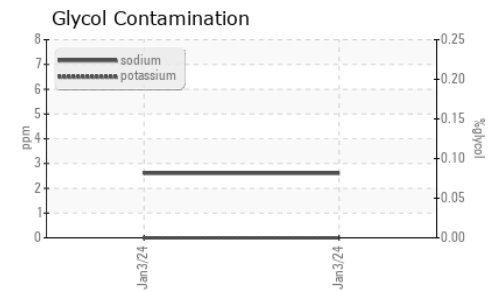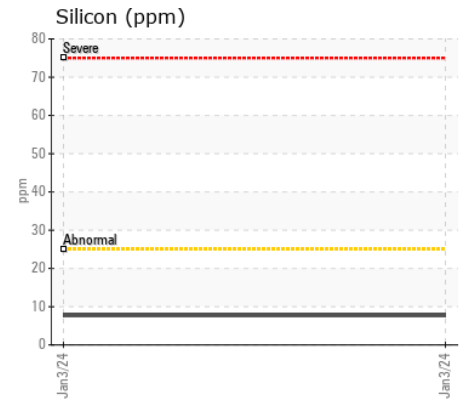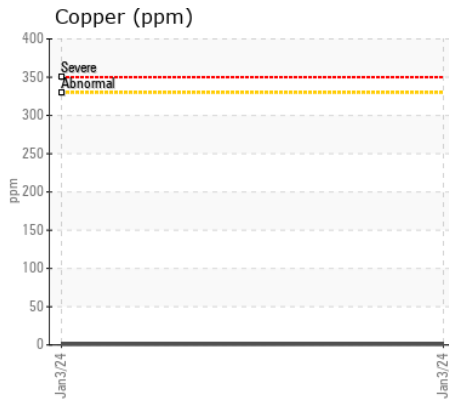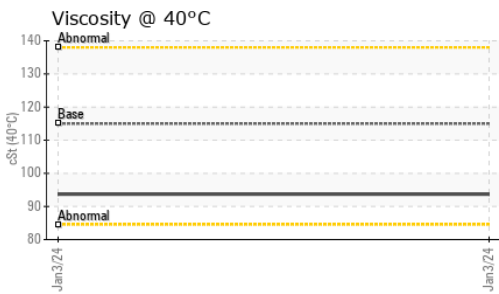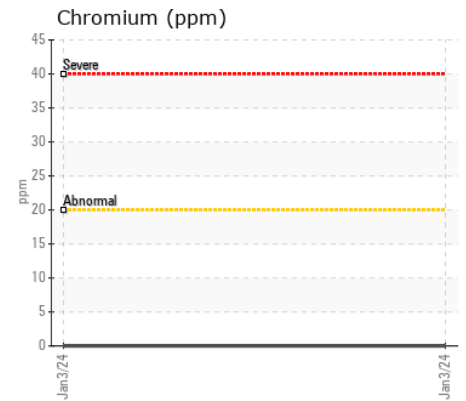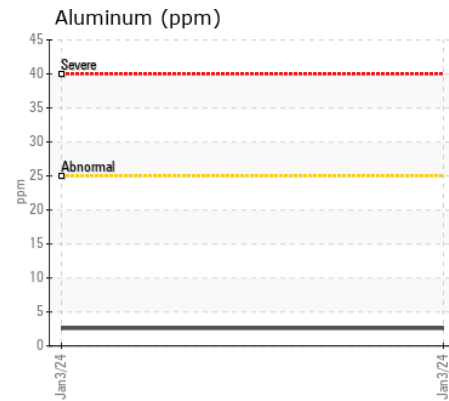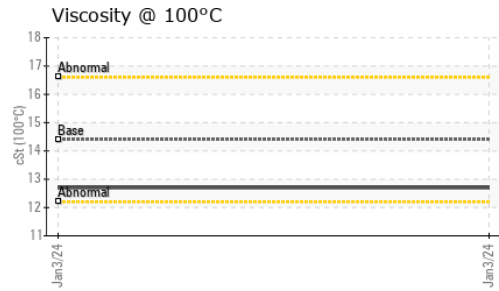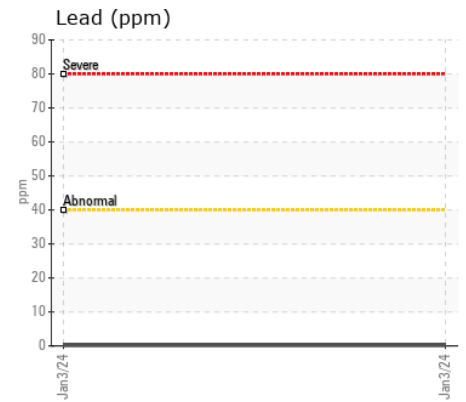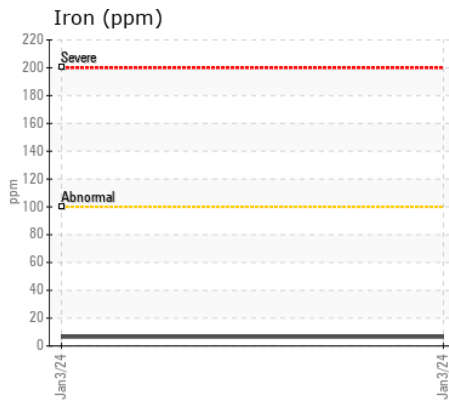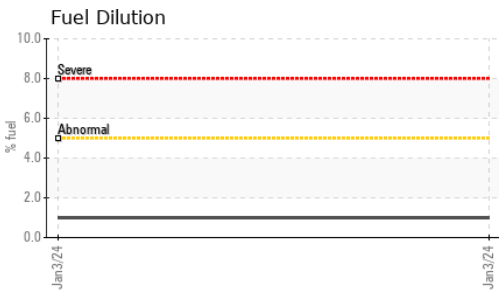

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0072500 **Received** : 12 Jan 2024
Lab Number : 02608370 **Diagnosed** : 16 Jan 2024
Unique Number : 5709456 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: FUELDILUTION, Glycol, KV40, PercentFuel, VI)

LAVIS CONTRACTING
 37462A HURON ROAD
 CLINTON, ON
 CA N0M 1L0
 Contact: Doug Francis
 dfrancis@lavis.ca
 T: (519)482-3694
 F: (519)482-7886

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.