



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
R237
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0737854	---	---
Sample Date		Client Info		27 Dec 2023	---	---
Machine Age	kms	Client Info		453555	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	34	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	6	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	5	---	---
Fuel		WC Method	>2.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.5	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	250	81	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	29	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	590	---	---
Calcium	ppm	ASTM D5185(m)	3000	1549	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	732	---	---
Zinc	ppm	ASTM D5185(m)	1350	835	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2565	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.9	---	---

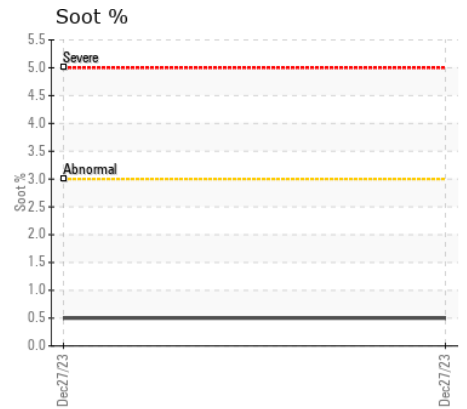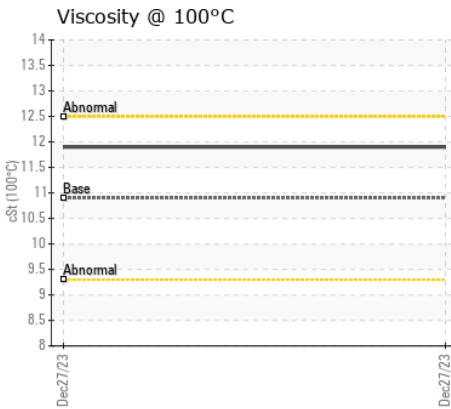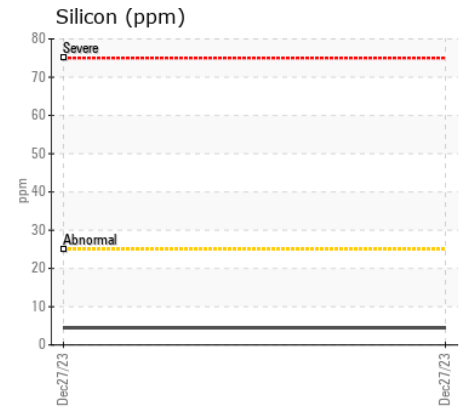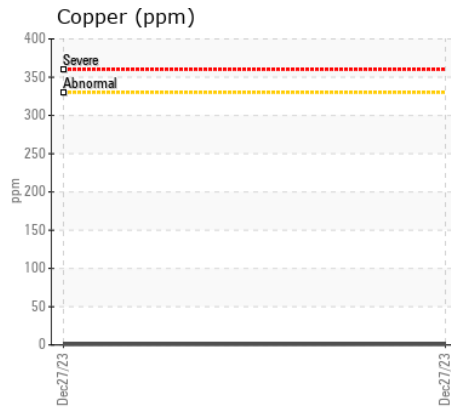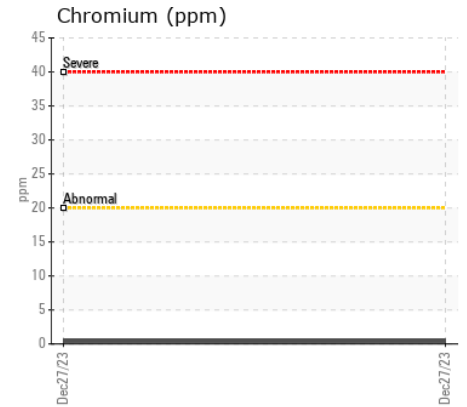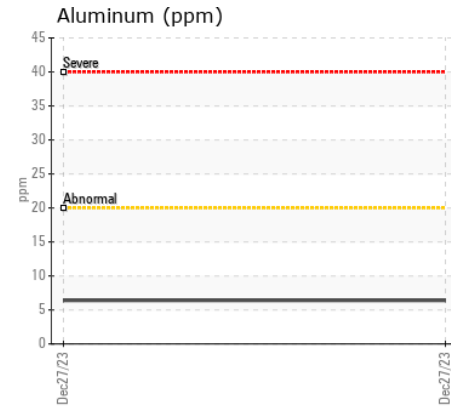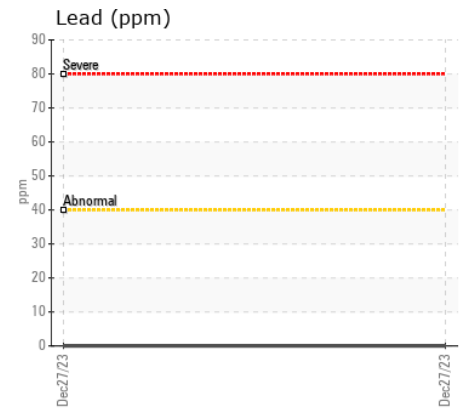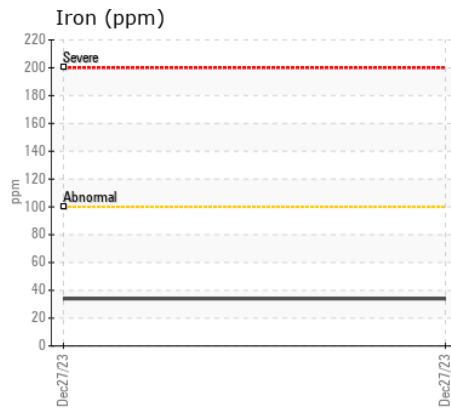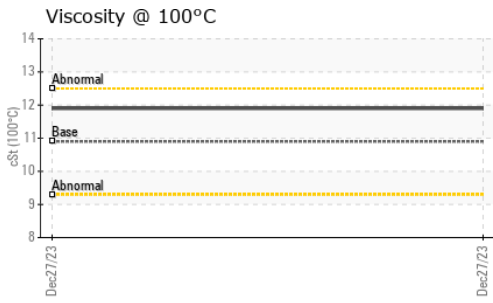

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **RUSH TRUCK CENTRES OF CANADA**
Sample No. : WC0737854 **Received** : 12 Jan 2024 **77 BELLEVUE DR**
Lab Number : 02608451 **Diagnosed** : 15 Jan 2024 **BELLEVILLE, ON**
Unique Number : 5709537 **Diagnostician** : Wes Davis **CA K8N 4Z5**
Test Package : MOB 1 **Contact: Service Manager**
LBRETT@RUSHTRUCKCENTRES.CA

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.